


## **VIRAJ 45 Direct Indirect variant 1 - 1002-2- 1.1.1.1.1.1.2.7.1.0.1.1.2**

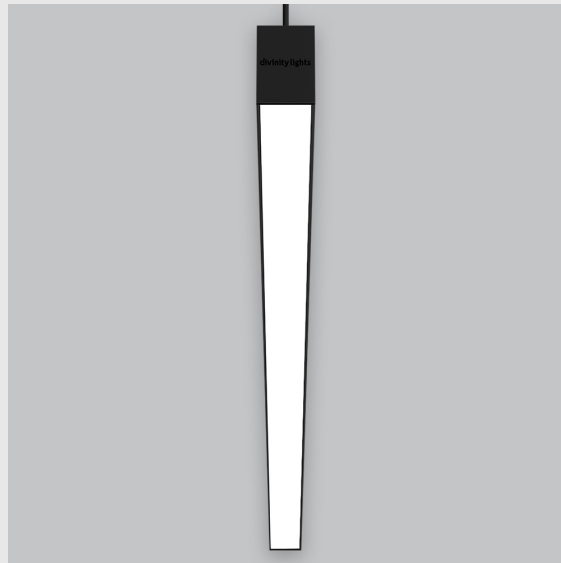

### **Available Filters**

1. Control = ON-OFF
2. CRI = >80
3. Lumen Type = Low
4. CCT (Colour Temperature) = 3000K
5. Mounting Type = Pendant
6. Material Colour = Black
7. Dimension = 300mm - 600mm
8. Distribution = Up-50% / Down-50%
9. Optics = PMMA Diffuser
10. Reflector = NA
11. Life of LED = L70 @50,000h
12. Beam Angle = 90° - 110°
13. Watt = 11W - 20W
14. SDCM = SDCM = < 3

**VIRAJ 45 (Direct - Indirect) and slim linear fixture has :**

- No visible screw
- Surface powder coat
- Luminaire housing of extruded aluminium
- LED PCB mounted on insert design with heat sink
- Snap-fit system
- Bottom opening for easy maintenance
- Pendant with cable suspension
- M6 bolt for M6 fastener
- High-performance PMMA diffuser
- Energy-efficient LED