


## **VIRAJ 45 Direct Indirect variant 2 - 1002-2- 2.2.2.2.2.1.3.7.1.0.1.1.4**

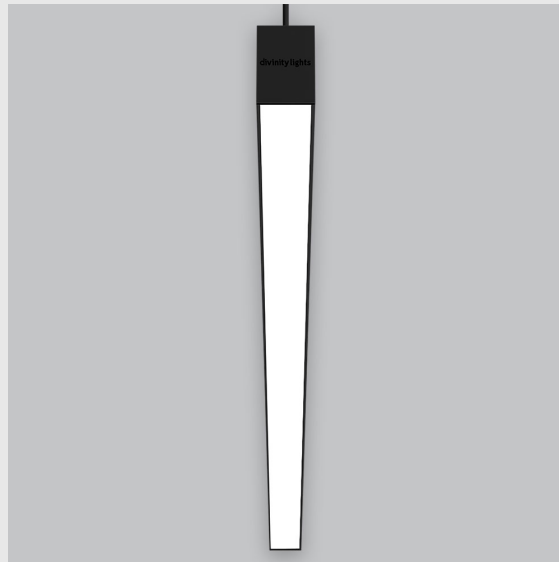

### **Available Filters**

1. Control = ON-OFF  
(FLICKER FREE)
2. CRI = >90
3. Lumen Type = High
4. CCT (Colour  
Temperature) = 4000K
5. Mounting Type =  
Surface
6. Material Colour = White
7. Dimension = 300mm -  
600mm
8. Distribution = Up-30% /  
Down-70%
9. Optics = PMMA Diffuser
10. Reflector = NA
11. Life of LED = L70  
@50,000h
12. Beam Angle = 90° -  
110°
13. Watt = 31W - 40W
14. SDCM = SDCM = < 3

**VIRAJ 45 (Direct - Indirect) and slim linear fixture has :**

- No visible screw
- Surface powder coat
- Luminaire housing of extruded aluminium
- LED PCB mounted on insert design with heat sink
- Snap-fit system
- Bottom opening for easy maintenance
- Pendant with cable suspension
- M6 bolt for M6 fastener
- High-performance PMMA diffuser
- Energy-efficient LED