


## Variant 5 - 1020-2.5.3.5.1.3.4.6.60.0.1.1.9

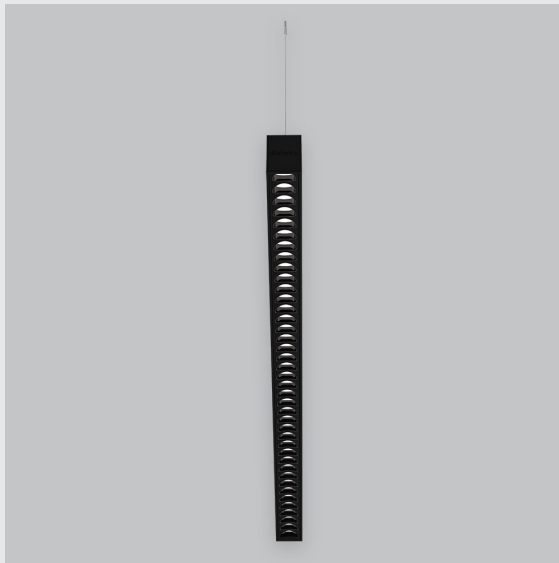

### Available Filters

1. CRI = >95
2. Lumen Type = High
3. CCT (Colour Temperature) = Tunable White 2700K-6500K
4. Control = DALI +
5. Mounting Type = Pendant
6. Material Colour = Grey
7. Dimension = 1201mm - 2400mm
8. Distribution = Up-80% / Down-20%
9. Optics = NA
10. Reflector = NA
11. Life of LED = L70 @50,000h
12. Beam Angle = 60° - 90°
13. Watt = 101W - 150W
14. SDCM = SDCM = < 3

XTO Linear has :

- Luminaire housing of extruded aluminium
- Range of size/angle design solutions
- Surface powder coat
- LED PCB mounted on insert design with heat sink
- Bottom opening for easy maintenance
- Modular design concept
- UGR less than