


VIRAJ 45

divinity lights

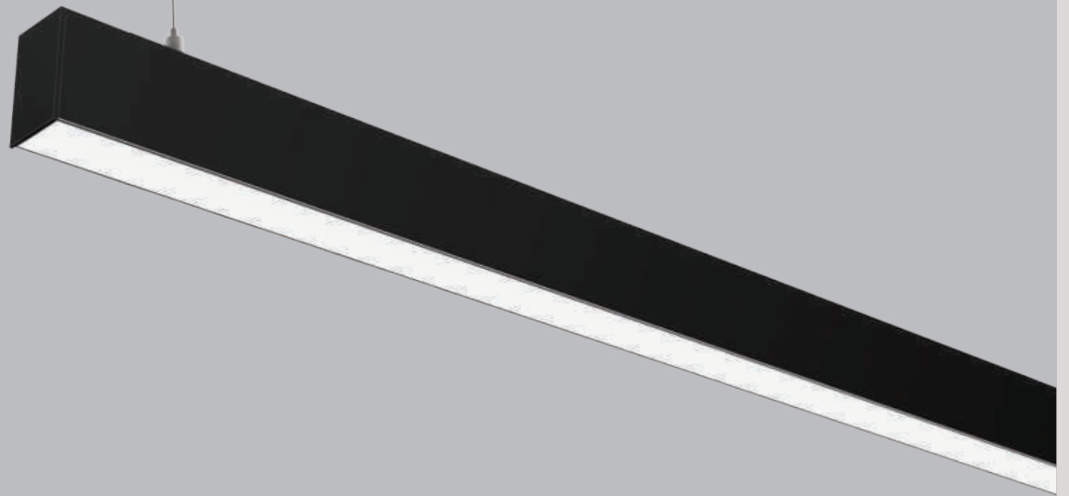

divinity lights

Quick Info

CRI \geq 90/ 95

3000K/ 4000K/ 5700K/ 6500K

Tunable White 2700K-6500K

System lumen > 100 lm/W

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 / DALI-2 DT8 / D4i / DALI +

POE (Power Over Ethernet)

SDCM<3

PMMA Diffuser

L70 @ 50,000h


Aluminium

Types



Pendant/ Surface/ Recessed

Single Line Diagram

Pendant / Surface



Recessed



VIRAJ 45

Viraj 45 linear fixture has :


- Extruded Aluminium Luminaire Housing
- Premium Finish Powder coating
- High performance PMMA diffuser
- Snap fit system
- Energy efficient LED
- LED PCB mounted on insert design with heat sink
- No visible screw
- Pendant using suspension cable with M6 bolt and fastener
- Bottom opening for easy maintenance

Colours



Light Distribution

Direct



CRI \geq 90/ 95








TUNABLE
WHITE

VIRAJ 45



VIRAJ 45 (DIRECT)

Product Order Code	System Power	Dimensions
1002-1 	7W	L = 300mm
1002-1 	14W	L = 600mm
1002-1 	21W	L = 900mm
1002-1 	28W	L = 1200mm
1002-1 	56W	L = 2400mm

Order Options

Distribution

Direct 1

Lumen Type

Low 1

High 2

CCT (Colour Temperature)

3000K 1

4000K 2

5700K 3

6500K 4

Tunable White 2700K-6500K  5

CRI

>90 1

>95 2

Beam Angle

Diffused

Control

ON-OFF  1

ON-OFF (FLICKER FREE)  2

DALI-2  3

DALI-2 DT8  4

DALI +  5

D4i  6

POE (Power Over Ethernet)  7

Mounting Type

Pendant 1

Surface 2

Recessed 3


Material Colour

Black  1

White  2

Grey  3

Accessories


Product Order Code	Accessories Name	Accessories Image
1002-01 <input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	LED PCB	
1002-02	Suspension Wire	
1002-03	PMMA Diffuser	
1002-04	Profile Connector	
1002-05 <input checked="" type="checkbox"/>	Profile Endcap	

Order Options

Lumen Type

- Low 1
- High 2

CCT (Colour Temperature)

- 3000K 1
- 4000K 2
- 5700K 3
- 6500K 4
- Tunable White 2700K-6500K  5

CRI

- >90 1
- >95 2

Material Colour

- Black 1
- White 2
- Grey 3