


LUMINAIRE PHOTOMETRIC TEST REPORT

Report number:


MANUFACTURER: DIVINITY LIGHTS		
Address: PLOT NO-A-89, RIICO INDUSTRIAL AREA, KAROLI, BHIWADI,301019		
NAME: ALINA 170	TYPE: 3000K CRI-90	WEIGHT:
SPECIFICATION: HC POWER 300 MA	DIMENSION: D-170 H-40 MM	SERIAL No.:

DATA OF LAMP		Imax (cd)	557.0	S/MH (C0/180)	1.28
MODEL	ALINA 170	EFFICIENCY (%)	100.0	S/MH (C90/270)	1.24
NOMINAL POWER (W)	18	TOTAL FLUX (lm)	1627.6	Voltage (V)	219.5
RATED VOLTAGE (V)	220	EFFICIENCY (lm/W)	87.5	Current (A)	0.164
NOMINAL FLUX (lm)	1627.6	η up (%)	0.0	Power (W)	18.60
LAMPS QUANTITY	1	η down (%)	100.0	Power Factor (PF)	0.570
TEST VOLTAGE (V)	219.5	Effictive Flux(lm)	1597.7	EEI	0.159

LUMINOUS INTENSITY DISTRIBUTION

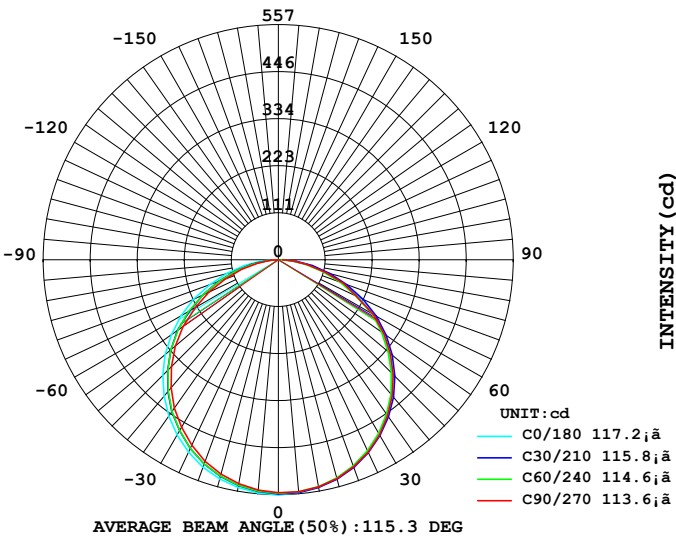

LUMINOUS INTENSITY DISTRIBUTION

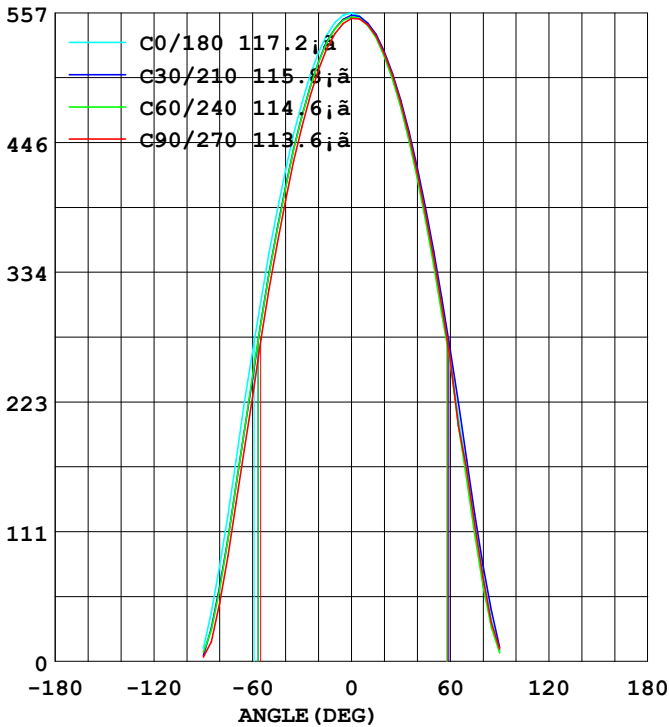

Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:08-30-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:8.000 m
Remarks: 3000K

Color Temperature Data List

Report number:

MANUFACTURER: DIVINITY LIGHTS		
Address: PLOT NO-A-89, RIICO INDUSTRIAL AREA, KAROLI, BHIWADI,301019		
NAME: ALINA 170	TYPE: 3000K CRI-90	WEIGHT:
SPECIFICATION: HC POWER 300 MA	DIMENSION: D-170 H-40 MM	SERIAL No.:


Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:08-30-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:8.000 m
Remarks: 3000K

AVERAGE AND CENTER E Figure

Report number:

MANUFACTURER: DIVINITY LIGHTS		
Address: PLOT NO-A-89, RIICO INDUSTRIAL AREA, KAROLI, BHIWADI,301019		
NAME: ALINA 170	TYPE: 3000K CRI-90	WEIGHT:
SPECIFICATION: HC POWER 300 MA	DIMENSION: D-170 H-40 MM	SERIAL No.:

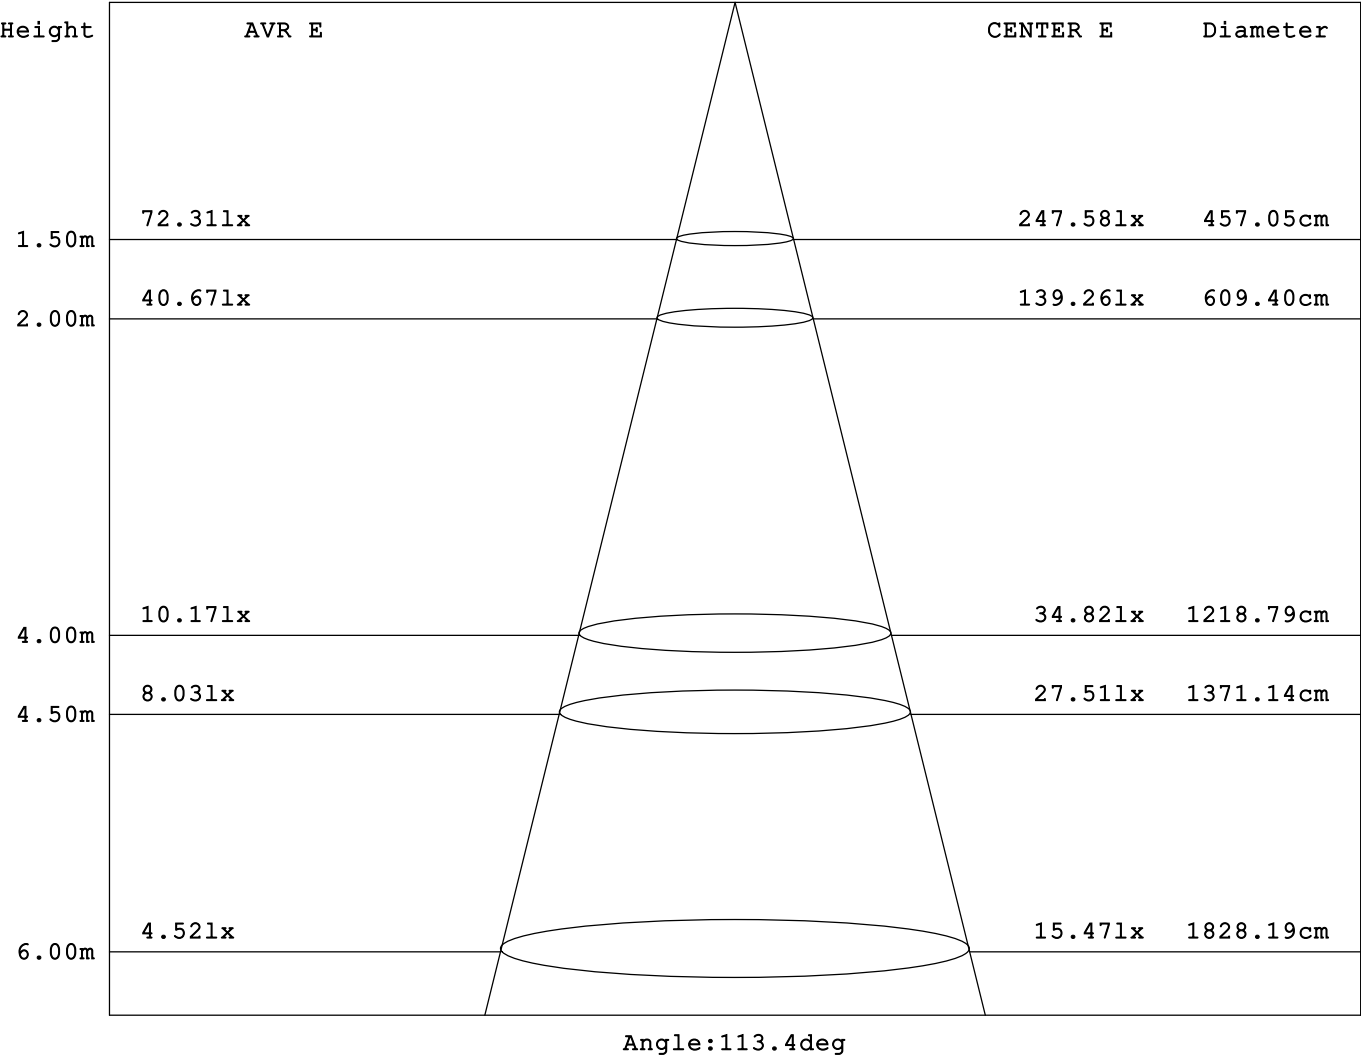

Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:08-30-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:8.000 m
Remarks: 3000K

ZONAL FLUX DIAGRAM

Report number:

MANUFACTURER: DIVINITY LIGHTS		
Address: PLOT NO-A-89, RIICO INDUSTRIAL AREA, KAROLI, BHIWADI,301019		
NAME: ALINA 170	TYPE: 3000K CRI-90	WEIGHT:
SPECIFICATION: HC POWER 300 MA	DIMENSION: D-170 H-40 MM	SERIAL No.:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Zone	total
10.0	548.6	543.2	539.0	539.6	547.2	547.0	546.8	544.4	0- 10	52.37	52.37
20.0	523.0	514.7	508.2	510.8	520.5	521.9	522.3	519.5	10- 20	150.4	202.8
30.0	479.8	468.1	459.0	464.4	476.7	478.8	479.8	477.4	20- 30	229.1	432.0
40.0	421.8	407.2	395.9	403.7	417.4	420.0	420.7	419.0	30- 40	278.1	710.1
50.0	350.5	332.8	319.4	329.5	344.1	346.0	346.6	345.7	40- 50	291.1	1001
60.0	266.6	244.5	227.3	241.5	259.7	263.0	261.2	263.5	50- 60	265.9	1267
70.0	172.2	150.8	135.4	148.7	163.8	164.5	164.8	165.5	60- 70	203.0	1470
80.0	82.17	63.20	50.04	62.17	73.91	73.50	72.19	74.78	70- 80	118.8	1589
90.0	11.13	6.400	3.648	5.856	8.640	9.568	10.49	10.78	80- 90	38.53	1628
100.0									90-100		
110.0									100-110		
120.0									110-120		
130.0									120-130		
140.0									130-140		
150.0									140-150		
160.0									150-160		
170.0									160-170		
180.0									170-180		
DEG	LUMINOUS INTENSITY:cd									UNIT:lm	

Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:08-30-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:8.000 m
Remarks: 3000K


LUMINANCE LIMITATION CURVES

Report number:

MANUFACTURER: DIVINITY LIGHTS		
Address: PLOT NO-A-89, RIICO INDUSTRIAL AREA, KAROLI, BHIWADI,301019		
NAME: ALINA 170	TYPE: 3000K CRI-90	WEIGHT:
SPECIFICATION: HC POWER 300 MA	DIMENSION: D-170 H-40 MM	SERIAL No.:

LUMINANCE LIMITATION CURVES

GLARE	CLASS	ILLUMINANCE (lx)							
		2000	1000	500	<=300				
1.15	A								
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

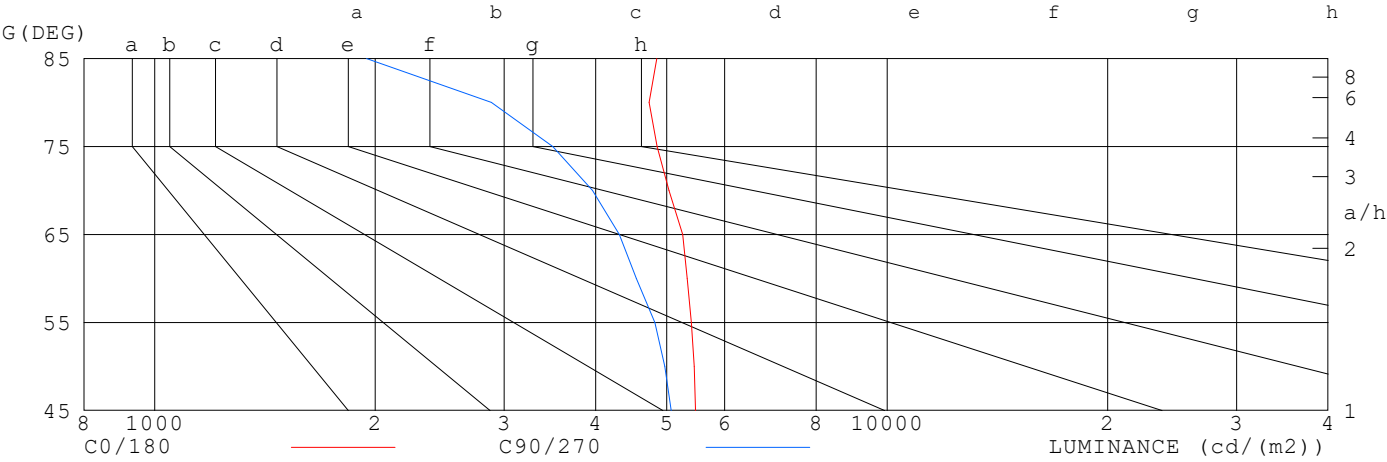

LUMINANCE cd/m2

G (DEG)	C0/180	C90/270
85	4846	1946
80	4732	2882
75	4854	3494
70	5037	3961
65	5258	4310
60	5332	4547
55	5403	4820
50	5453	4970
45	5477	5074


Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:08-30-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:8.000 m
Remarks: 3000K

ISOCANDELA DIAGRAM

Report number:

MANUFACTURER: DIVINITY LIGHTS		
Address: PLOT NO-A-89, RIICO INDUSTRIAL AREA, KAROLI, BHIWADI,301019		
NAME: ALINA 170	TYPE: 3000K CRI-90	WEIGHT:
SPECIFICATION: HC POWER 300 MA	DIMENSION: D-170 H-40 MM	SERIAL No.:

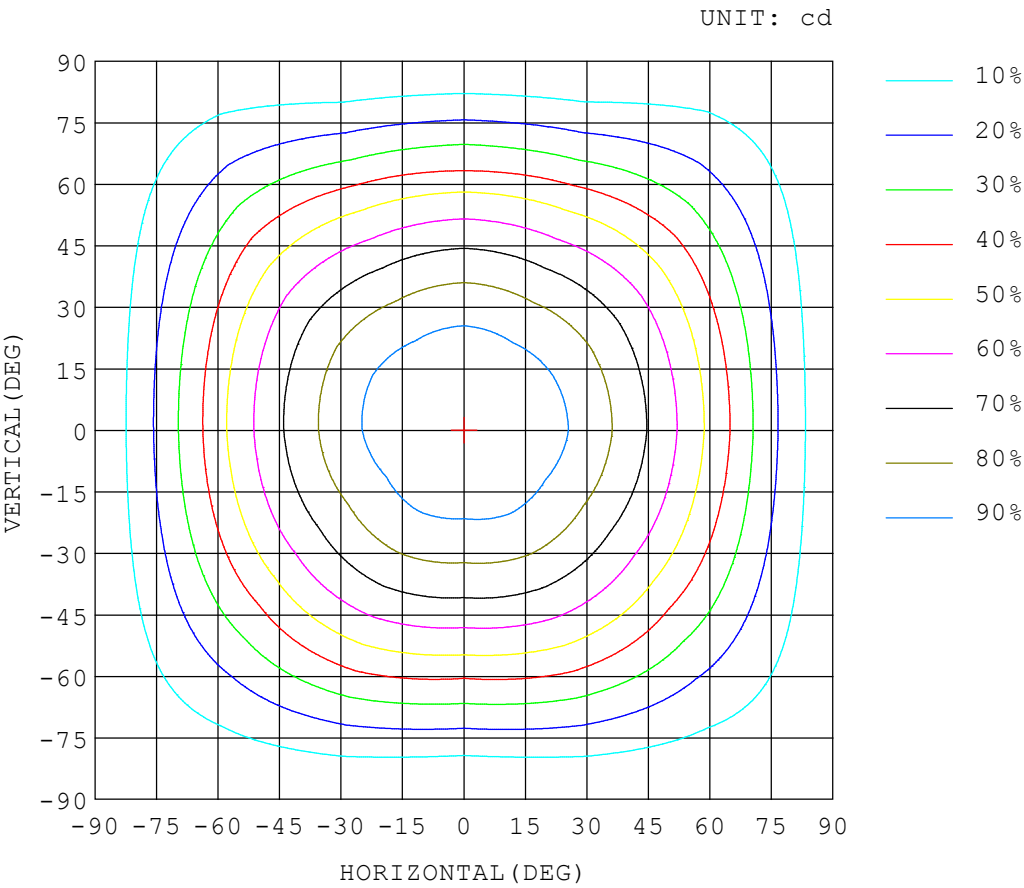


Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:08-30-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:8.000 m
Remarks: 3000K

ISOLUX DIAGRAM

Report number:

MANUFACTURER: DIVINITY LIGHTS		
Address: PLOT NO-A-89, RIICO INDUSTRIAL AREA, KAROLI, BHIWADI,301019		
NAME: ALINA 170	TYPE: 3000K CRI-90	WEIGHT:
SPECIFICATION: HC POWER 300 MA	DIMENSION: D-170 H-40 MM	SERIAL No.:

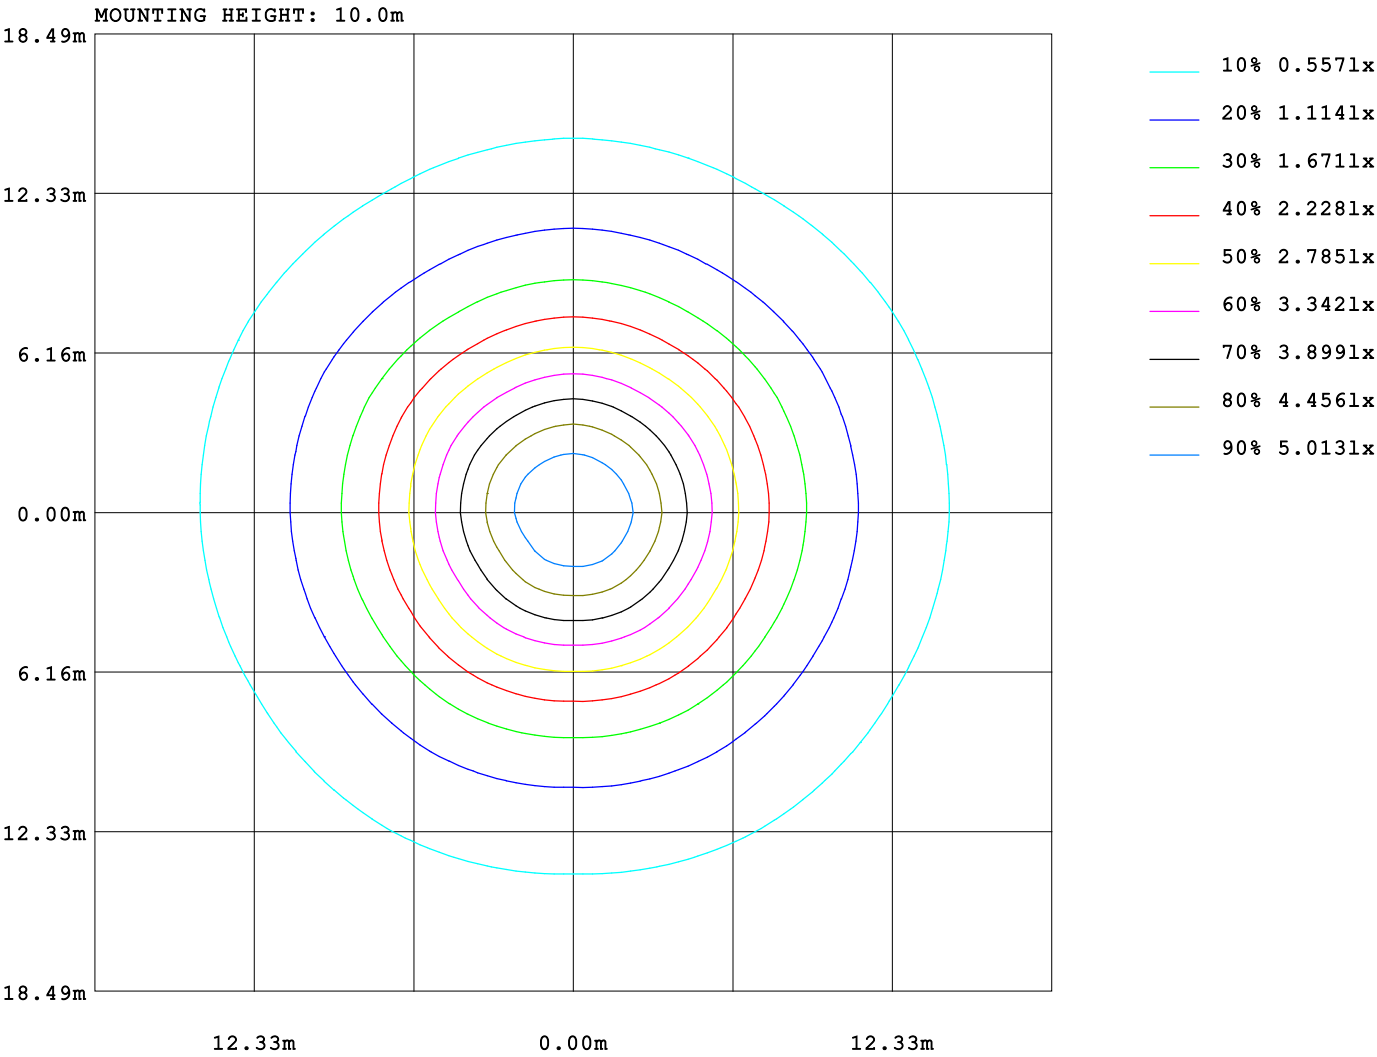

Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:08-30-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:8.000 m
Remarks: 3000K



AREA LUMINOUS FLUX

Report number:

MANUFACTURER: DIVINITY LIGHTS																				
Address: PLOT NO-A-89, RIICO INDUSTRIAL AREA, KAROLI, BHIWADI,301019																				
NAME: ALINA 170										TYPE: 3000K CRI-90					WEIGHT:					
SPECIFICATION: HC POWER 300 MA										DIMENSION: D-170 H-40 MM					SERIAL No.:					

VERTICAL (DEG)	AREA FLUX DIAGRAM																		UNIT:lm		Φ t	Φ a
	0.03	0.14	0.32	0.50	0.63	0.72	0.84	0.99	1.10	1.10	1.00	0.84	0.74	0.66	0.53	0.35	0.17	0.04	10.6	1.44		
90																						
80																						
70																						
60																						
50																						
40																						
30																						

Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:08-30-2025


Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:8.000 m
Remarks: 3000K

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Report number:

MANUFACTURER: DIVINITY LIGHTS															
Address: PLOT NO-A-89, RIICO INDUSTRIAL AREA, KAROLI, BHIWADI,301019															
NAME: ALINA 170								TYPE: 3000K CRI-90				WEIGHT:			
SPECIFICATION: HC POWER 300 MA								DIMENSION: D-170 H-40 MM				SERIAL No.:			

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pf _c	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.03	.99	.95	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.70	.64	.77	.69	.63	.74	.68	.62	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.68	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.46	.61	.52	.46	.59	.51	.46	.57	.50	.45	.55	.49	.45	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.40	.51	.45	.39	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.41	.35	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.45	.37	.32	.44	.37	.31	.43	.36	.31	.42	.36	.31	.29
9.0	.42	.34	.28	.42	.34	.28	.41	.33	.28	.40	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.30	.26	.37	.30	.25	.36	.30	.25	.24

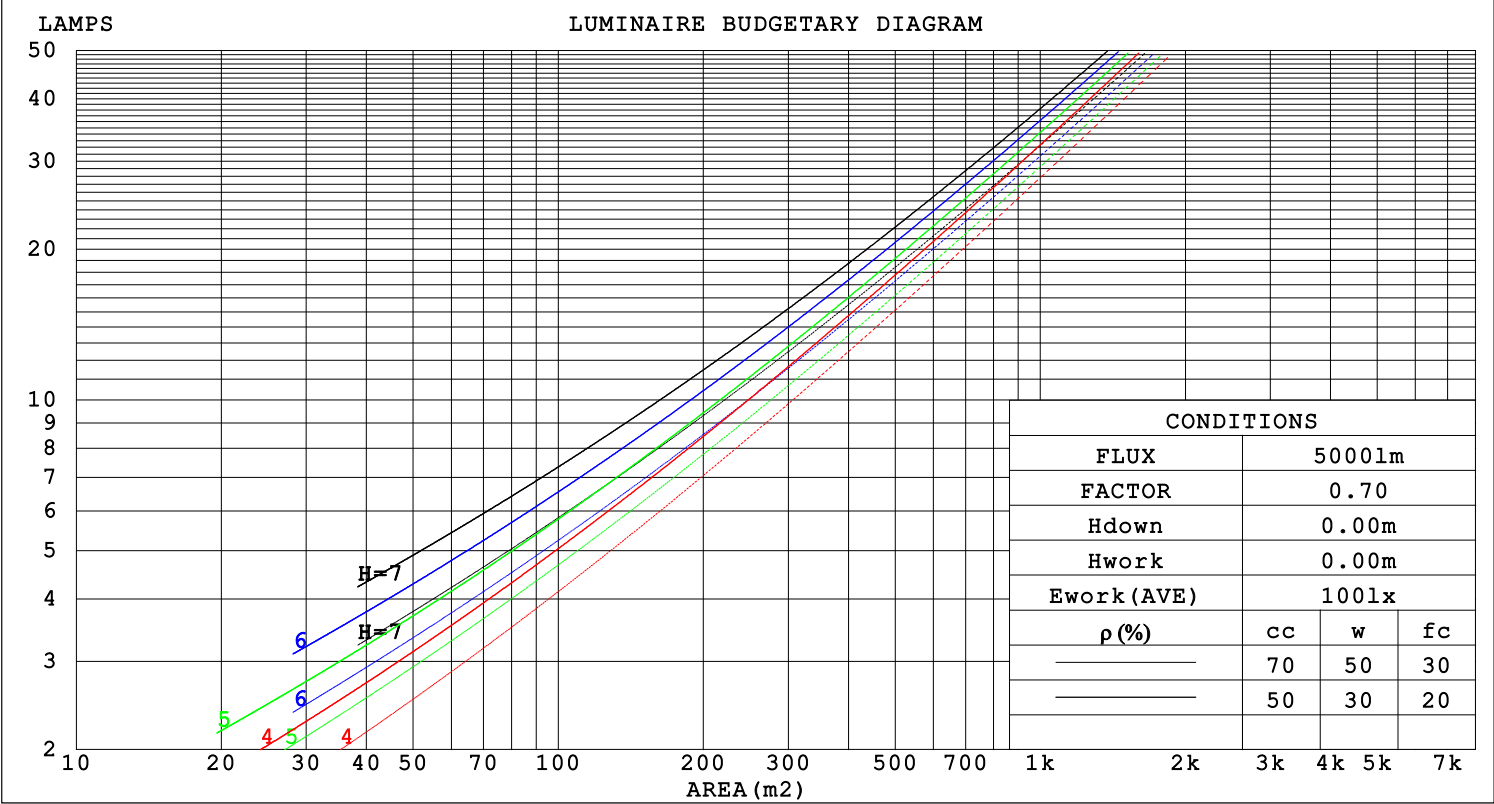

Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:08-30-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:8.000 m
Remarks: 3000K

WEC AND CCEC

Report number:

MANUFACTURER: DIVINITY LIGHTS														
Address: PLOT NO-A-89, RIICO INDUSTRIAL AREA, KAROLI, BHIWADI,301019														
NAME: ALINA 170							TYPE: 3000K CRI-90					WEIGHT:		
SPECIFICATION: HC POWER 300 MA							DIMENSION: D-170 H-40 MM					SERIAL No.:		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.317	.180	.057	.310	.177	.056	.297	.170	.054	.285	.164	.053	.273	.158	.051	
2.0	.296	.162	.050	.290	.160	.049	.278	.155	.048	.268	.150	.047	.258	.146	.046	
3.0	.273	.146	.044	.268	.144	.043	.258	.140	.042	.248	.136	.042	.239	.132	.041	
4.0	.252	.131	.038	.247	.129	.038	.238	.126	.038	.229	.123	.037	.221	.120	.037	
5.0	.232	.118	.034	.228	.117	.034	.220	.115	.034	.212	.112	.033	.205	.110	.033	
6.0	.215	.108	.031	.212	.107	.031	.204	.105	.030	.197	.103	.030	.191	.101	.030	
7.0	.200	.099	.028	.197	.098	.028	.190	.096	.028	.184	.094	.027	.179	.093	.027	
8.0	.187	.091	.026	.184	.091	.026	.178	.089	.025	.173	.087	.025	.167	.086	.025	
9.0	.175	.085	.024	.172	.084	.024	.167	.083	.023	.162	.081	.023	.158	.080	.023	
10.0	.165	.079	.022	.162	.078	.022	.157	.077	.022	.153	.076	.022	.149	.075	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.181	.156	.134	.155	.134	.115	.106	.092	.080	.061	.053	.046	.020	.017	.015	
2.0	.173	.132	.097	.148	.114	.084	.101	.079	.059	.059	.046	.034	.019	.015	.011	
3.0	.165	.114	.074	.142	.099	.064	.097	.069	.045	.056	.040	.026	.018	.013	.009	
4.0	.158	.101	.058	.135	.087	.050	.093	.061	.035	.054	.036	.021	.017	.012	.007	
5.0	.150	.091	.047	.129	.078	.041	.089	.055	.029	.051	.032	.017	.017	.010	.006	
6.0	.143	.082	.039	.123	.071	.034	.085	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.136	.075	.033	.117	.065	.029	.081	.046	.020	.047	.027	.012	.015	.009	.004	
8.0	.129	.070	.029	.111	.060	.025	.077	.042	.018	.045	.025	.011	.015	.008	.003	
9.0	.123	.065	.025	.106	.056	.022	.074	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.118	.060	.022	.101	.052	.019	.070	.037	.014	.041	.022	.008	.013	.007	.003	

Test System:HOPOO HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:08-30-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:8.000 m
 Remarks: 3000K

Uncorrected UGR Table

Report number:

MANUFACTURER: DIVINITY LIGHTS											
Address: PLOT NO-A-89, RIICO INDUSTRIAL AREA, KAROLI, BHIWADI,301019											
NAME: ALINA 170					TYPE: 3000K CRI-90			WEIGHT:			
SPECIFICATION: HC POWER 300 MA					DIMENSION: D-170 H-40 MM			SERIAL No.:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H	y = 2H	18.7	20.2	18.9	20.4	20.6	18.3	19.8	18.5	20.0	20.2
	3H	20.3	21.7	20.6	21.9	22.2	19.6	21.1	19.9	21.3	21.5
	4H	20.9	22.3	21.3	22.5	22.8	20.1	21.5	20.4	21.7	22.0
	6H	21.5	22.7	21.8	23.0	23.3	20.4	21.7	20.7	22.0	22.2
	8H	21.6	22.9	22.0	23.2	23.5	20.4	21.7	20.8	21.9	22.2
	12H	21.8	23.0	22.1	23.3	23.6	20.4	21.6	20.8	21.9	22.2
4H	2H	19.2	20.6	19.5	20.8	21.1	18.9	20.3	19.2	20.5	20.8
	3H	21.0	22.1	21.3	22.4	22.7	20.5	21.7	20.8	22.0	22.3
	4H	21.7	22.8	22.1	23.1	23.5	21.1	22.2	21.5	22.5	22.8
	6H	22.4	23.4	22.8	23.7	24.1	21.5	22.4	21.9	22.8	23.2
	8H	22.6	23.5	23.0	23.9	24.3	21.5	22.4	21.9	22.8	23.2
	12H	22.8	23.6	23.2	24.0	24.4	21.6	22.4	22.0	22.8	23.2
8H	4H	21.9	22.8	22.4	23.2	23.6	21.4	22.3	21.8	22.6	23.0
	6H	22.7	23.5	23.1	23.9	24.3	21.9	22.6	22.3	23.0	23.5
	8H	23.0	23.7	23.5	24.1	24.6	22.0	22.7	22.5	23.1	23.5
	12H	23.3	23.9	23.8	24.3	24.8	22.1	22.7	22.6	23.1	23.6
12H	4H	21.9	22.8	22.4	23.1	23.6	21.4	22.2	21.8	22.6	23.0
	6H	22.7	23.4	23.2	23.8	24.3	21.9	22.6	22.4	23.0	23.5
	8H	23.1	23.6	23.5	24.1	24.6	22.1	22.7	22.6	23.1	23.6
Variations with the observer position at spacings:											
S = 1.0H		+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H		+ 0.1 / - 0.2					+ 0.2 / - 0.4				
2.0H		+ 0.2 / - 0.3					+ 0.3 / - 0.5				

CIE Pub.117 Corrected 1628 lm Total Lamp Luminous Flux.(8log(F/F0) = 1.7)

Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:08-30-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:8.000 m
Remarks: 3000K

UTILIZATION FACTORS TABLE

Report number:

MANUFACTURER: DIVINITY LIGHTS		
Address: PLOT NO-A-89, RIICO INDUSTRIAL AREA, KAROLI, BHIWADI, 301019		
NAME: ALINA 170	TYPE: 3000K CRI-90	WEIGHT:
SPECIFICATION: HC POWER 300 MA	DIMENSION: D-170 H-40 MM	SERIAL No.:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	45	38	56	45	38	55	44	38	31
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	64	56	72	65	56	49
1.25	83	72	65	81	71	64	78	70	63	56
1.50	88	78	70	86	77	70	83	75	69	61
2.00	94	86	79	93	85	78	89	82	77	69
2.50	98	91	84	96	89	83	93	86	82	73
3.00	102	95	89	100	93	88	96	90	86	77
4.00	106	100	95	104	98	94	99	95	91	82
5.00	108	103	99	106	101	98	101	98	95	85
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		


Test System: HOPOO HPG1800
 Temperature: 25.3 DEG
 Operators:
 Test Date: 08-30-2025

Test Set: 5.0 deg/s C-Gamma (TYPE C)
 Humidity: 65.0%
 Test Distance: 8.000 m
 Remarks: 3000K

ISOCANDELA DIAGRAM

Report number:

MANUFACTURER: DIVINITY LIGHTS		
Address: PLOT NO-A-89, RIICO INDUSTRIAL AREA, KAROLI, BHIWADI,301019		
NAME: ALINA 170	TYPE: 3000K CRI-90	WEIGHT:
SPECIFICATION: HC POWER 300 MA	DIMENSION: D-170 H-40 MM	SERIAL No.:

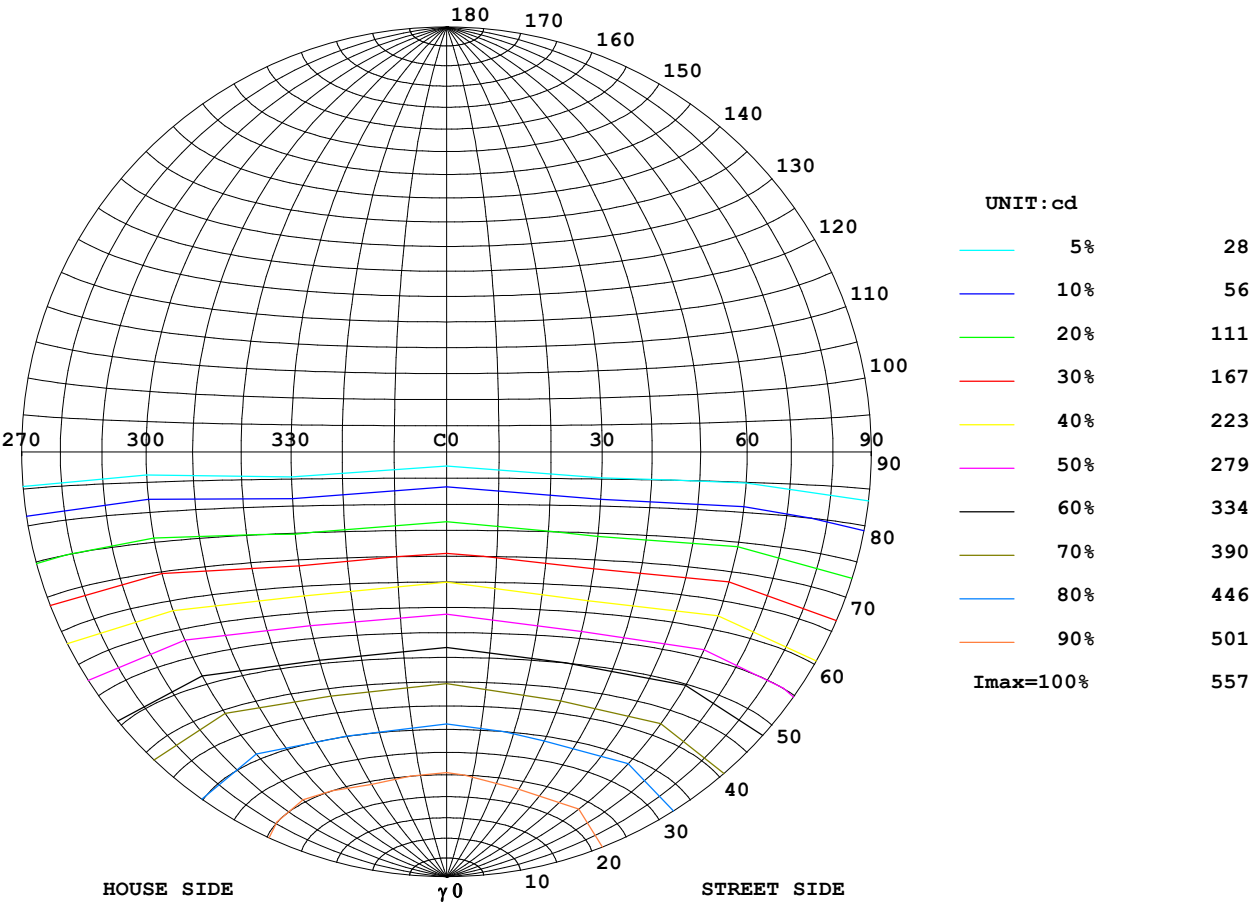

Test System:HOP00 HPG1800
Temperature:25.3DEG
Operators:
Test Date:08-30-2025



Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:8.000 m
Remarks: 3000K

ISOLUX DIAGRAM

Report number:

MANUFACTURER: DIVINITY LIGHTS		
Address: PLOT NO-A-89, RIICO INDUSTRIAL AREA, KAROLI, BHIWADI,301019		
NAME: ALINA 170	TYPE: 3000K CRI-90	WEIGHT:
SPECIFICATION: HC POWER 300 MA	DIMENSION: D-170 H-40 MM	SERIAL No.:

ILLUMINANCE AT MH=10 m,Enadir = 5.57 lx

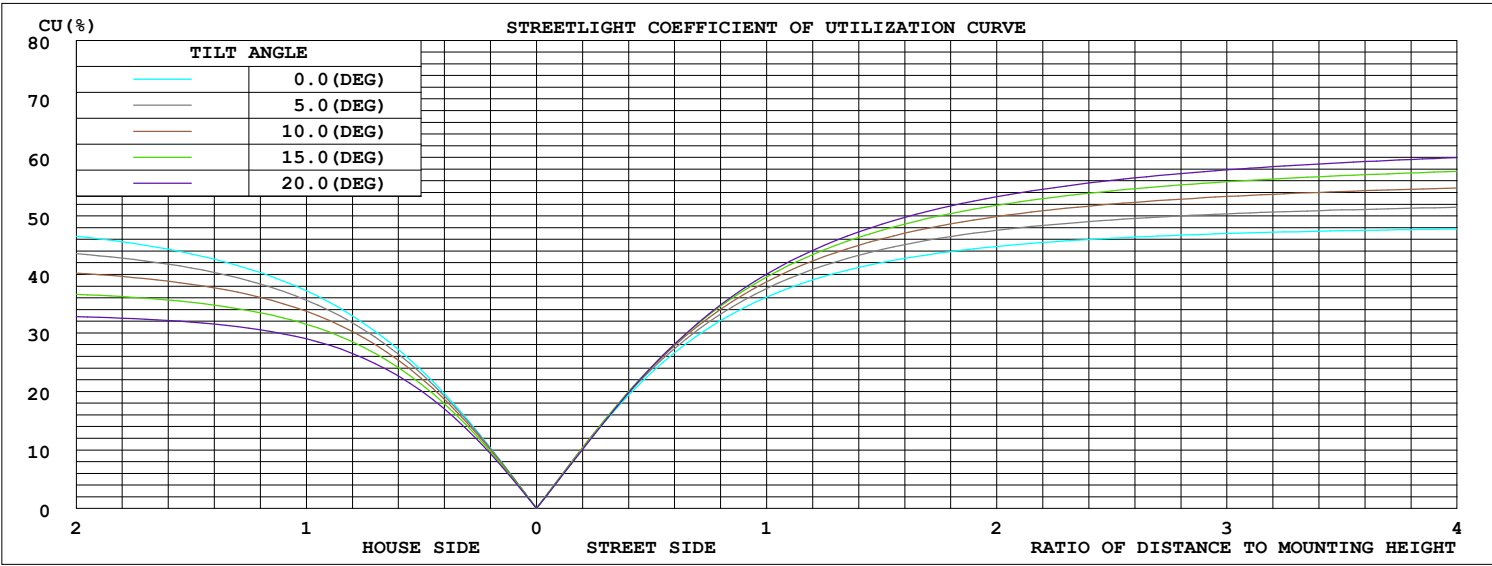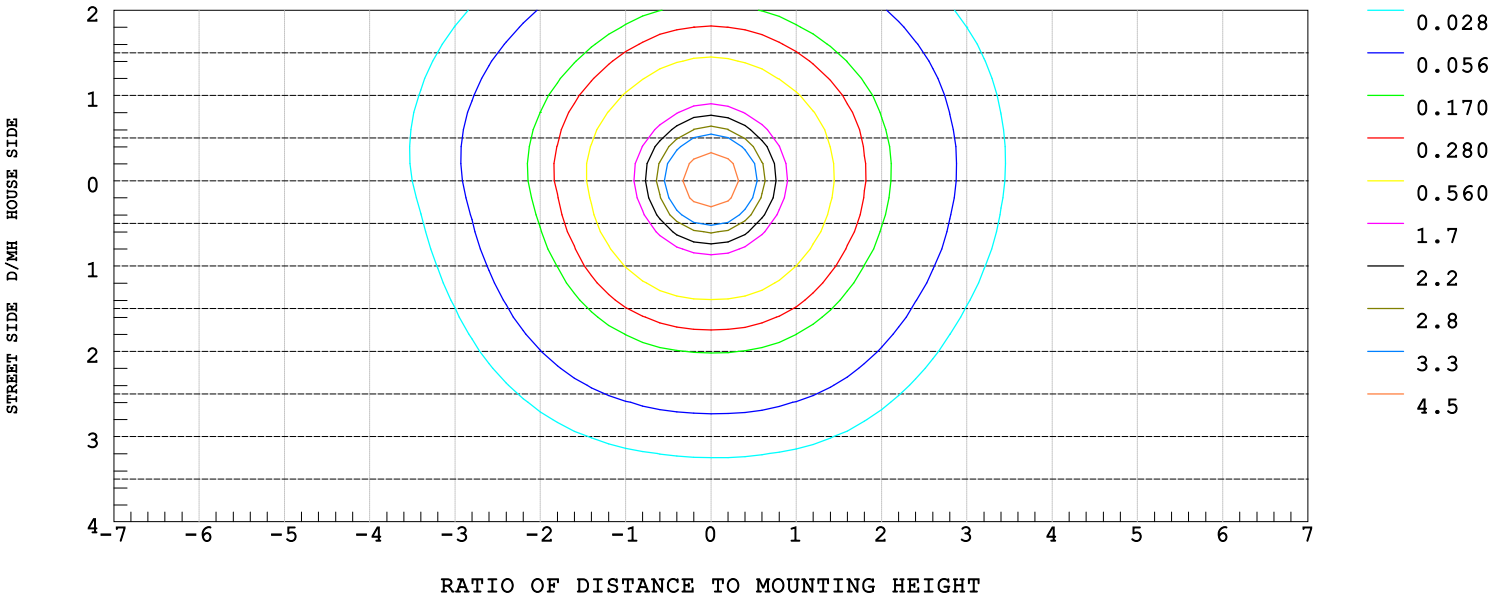


Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:08-30-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:8.000 m
Remarks: 3000K

ISOCANDELA DIAGRAM

Report number:

MANUFACTURER: DIVINITY LIGHTS		
Address: PLOT NO-A-89, RIICO INDUSTRIAL AREA, KAROLI, BHIWADI,301019		
NAME: ALINA 170	TYPE: 3000K CRI-90	WEIGHT:
SPECIFICATION: HC POWER 300 MA	DIMENSION: D-170 H-40 MM	SERIAL No.:

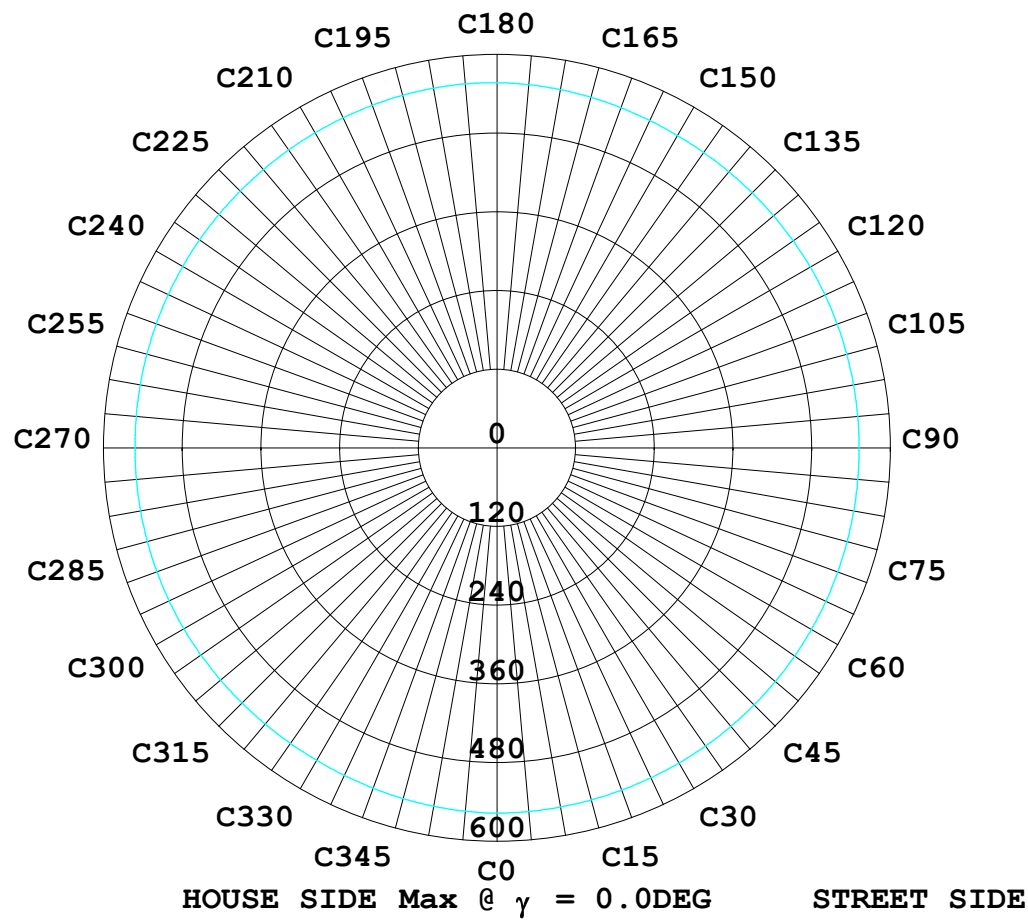

Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:08-30-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:8.000 m
Remarks: 3000K

LUMINOUS DISTRIBUTION INTENSITY DATA

Report number:

MANUFACTURER: DIVINITY LIGHTS		
Address: PLOT NO-A-89, RIICO INDUSTRIAL AREA, KAROLI, BHIWADI,301019		
NAME: ALINA 170	TYPE: 3000K CRI-90	WEIGHT:
SPECIFICATION: HC POWER 300 MA	DIMENSION: D-170 H-40 MM	SERIAL No.:

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330
0.0	557	555	554	552	552	550	557	555	554	552	552	550
5.0	555	551	551	548	548	546	554	554	552	552	550	550
10.0	549	543	543	539	541	538	547	548	546	547	544	545
15.0	538	532	531	526	528	526	536	538	536	537	534	535
20.0	523	515	515	508	512	510	521	524	520	522	519	521
25.0	504	494	494	486	491	488	501	505	500	504	499	503
30.0	480	468	468	459	466	463	477	482	476	480	475	480
35.0	453	440	440	430	437	435	449	455	447	452	446	453
40.0	422	408	407	396	405	403	417	425	415	421	415	423
45.0	387	372	371	359	369	367	382	390	379	385	379	389
50.0	351	333	332	319	331	329	344	352	340	347	340	352
55.0	310	292	290	276	289	287	303	312	298	306	298	312
60.0	267	243	246	227	245	238	260	268	258	261	258	269
65.0	222	198	197	182	196	194	210	222	202	202	203	224
70.0	172	151	151	135	150	148	164	173	156	165	156	175
75.0	126	105	105	90.4	104	103	118	127	109	117	109	128
80.0	82.1	64.3	62.0	50.0	61.8	62.4	73.9	82.3	64.7	72.1	65.2	84.2
85.0	42.2	28.7	26.8	16.9	27.1	26.7	35.9	43.8	29.3	33.2	29.4	46.1
90.0	11.1	4.92	7.87	3.64	7.74	3.96	8.64	11.9	7.23	10.4	7.61	13.9

Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:08-30-2025

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:8.000 m
Remarks: 3000K