


## ANTHUS-33

Direct | Recessed

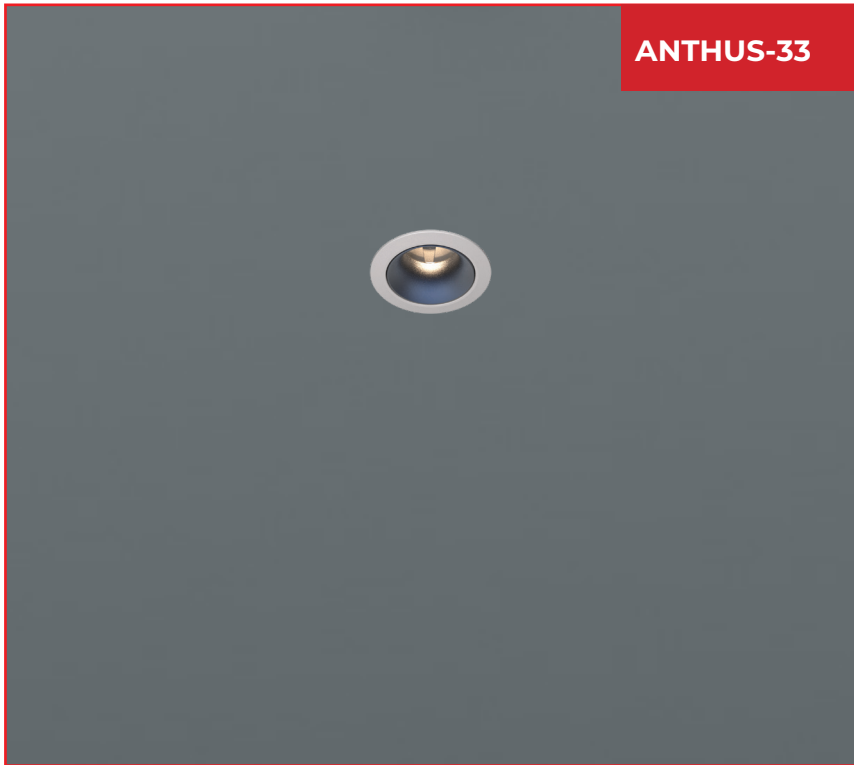

**ANTHUS-33** is Premium range Recessed COB Spot light Downlighter available in Fixed and Adjustable version made up of die cast aluminium housing, heat sink and with premium powder coated finish.

Powered by high quality COB with a binning tolerance of  $\leq 3$  SDCM and CRI  $\geq 90$ . The luminaire maintains atleast 70% of its luminous flux after 50,000 operating hours, guaranteeing long term reliability. High efficiency optics with beam angle options of 13°/ 18°/ 24°/ 28° and precision engineered.

Anthus-33 Downlighter available in wattage from ranging from 5W is crafted for direct light distribution making it ideal for residential & professional applications.

Options in reflector cover available as per request to enhance installation and functionality.

## ANTHUS-33



### Quick Info

#### Mounting Type

Recessed

#### Material Colour

Customize RAL available

#### Protection mode

IP40

#### Driver Details

ON/OFF/, DALI-2 DT6 / DALI-2 DT8/ DALI +

Power Factor (PF) -0.95

THD- <10%

UGR - <19

#### LED

CCT- 3000K/ 4000K/ 5700K/ TUNABLE WHITE 2700K-6500K

CRI-  $\geq 90$

Life Span - L70@50000h

MacAdam -  $\leq 3$  SDCM

#### Beam Angle

13°/ 18°/ 24°/ 28°

#### Optics

Lens & Reflector

#### Efficacy

80lm/w

#### Electrical

Wattage - 5W

Input Voltage- 220-240 VAC

#### Physical

Outer Dia- 42mm

Pin Dia - 33mm

Height- 61mm

### Single Line Diagram

Recessed

ANTHUS-33

