


ANTHUS

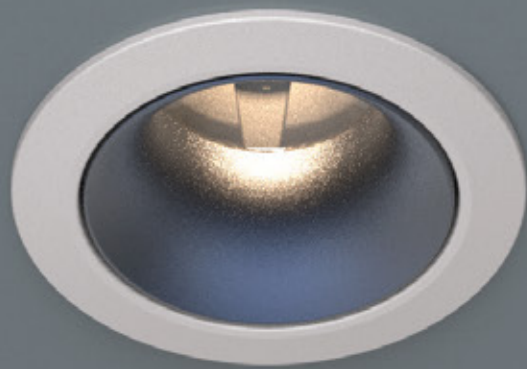

Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6, DALI-2 DT8, DALI+

SDCM<3

Lens & Reflector


L70 @50,000h

Types


Recessed

Single Line Diagram


Anthus General/Spot- 37

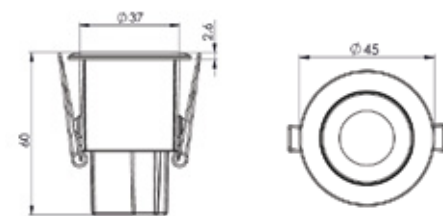


Anthus General/Spot- 64

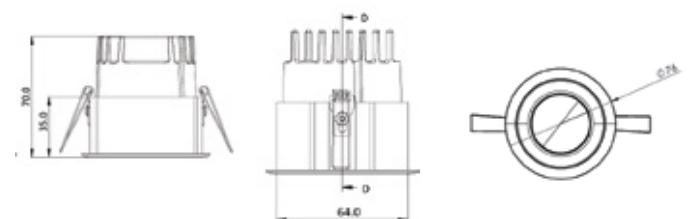

Anthus Spot- 64

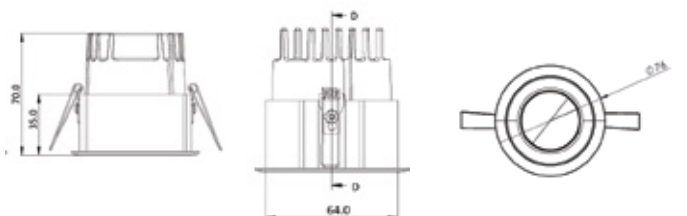

Anthus General/Spot- 87

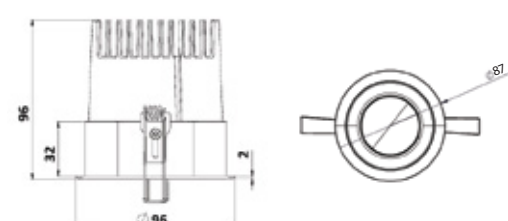

ANTHUS

Anthus Downlight features has:

- Die cast- aluminium Luminaire housing
- Premium powder coated finish
- COB (Chip on Board) technology with Lens
- Available in Fixed version
- LED with effective colour rendering
- Provides comfortable illumination with reduced eye strain, ideal for premium interiors.
- Delivers focused and controlled light distribution for accent
- Ensures excellent lumen output with low energy consumption.

ANTHUS



ANTHUS GENERAL- 37

System Power	Dimension	Beam Angle
5W	Outer Dia-45mm, Cutout Dia-37mm, Height- 60mm	9°,15°, 24°, 35°, 60°

ANTHUS SPOT- 37

System Power	Dimension	Beam Angle
5W	Outer Dia-45mm, Cutout Dia-37mm, Height- 60mm	18°, 25°, 36°

ANTHUS GENERAL- 64

System Power	Dimension	Beam Angle
10W	Outer Dia- 76mm, Cutout Dia- 64mm, Height- 70mm	15°, 25°, 35°, 50°

ANTHUS SPOT- 64

System Power	Dimension	Beam Angle
10W	Outer Dia- 76mm, Cutout Dia- 64mm, Height- 70mm	6°, 10°, 15°, 26°, 36°, 60°

ANTHUS GENERAL- 87

System Power	Dimension	Beam Angle
15W	Outer Dia-96mm, Cutout Dia-87mm, Height- 96mm	60°

ANTHUS SPOT- 87

System Power	Dimension	Beam Angle
15W	Outer Dia-96mm, Cutout Dia-87mm, Height- 96mm	6°, 10°, 15°, 26°, 36°, 60°, 80°

Order Options

CCT (Colour Temperature)

3000K

4000K

5700K

Tunable White 2700K-6500K



CRI

>90

Control

ON-OFF



ON-OFF (FLICKER FREE)



DALI-2 DT6



DALI-2 DT8



DALI+



Mounting

Recessed

Material Colour

RAL As Per Request