

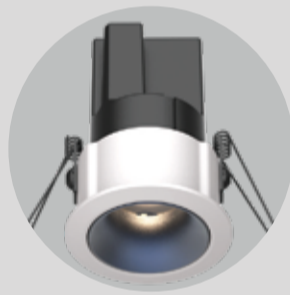



**ANTHUS GL**

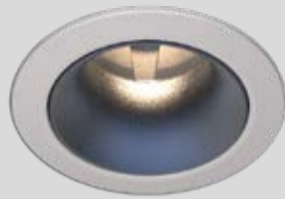

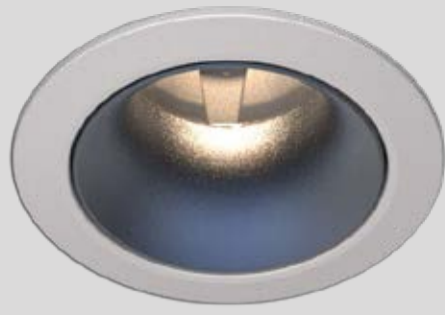

## ANTHUS GL

Anthus GL Downlight features has:

- Die cast- aluminium Luminaire housing
- Premium powder coated finish
- COB (Chip on Board) technology with Lens
- Available in Adjustable & Fixed version
- LED with effective colour rendering
- Precision-engineered, electroplated and nano-plated reflector
- Zero multiple shadows
- Unique pull ring design

### Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6, DALI-2 DT8, DALI+

SDCM<3

Lens & Reflector


L70 @50,000h

### Types


Recessed

### Single Line Diagram


Anthus- 33

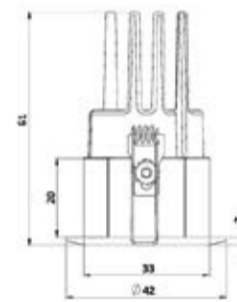


Anthus General- 64

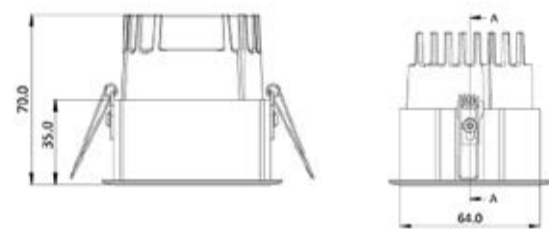

Anthus Spot- 64

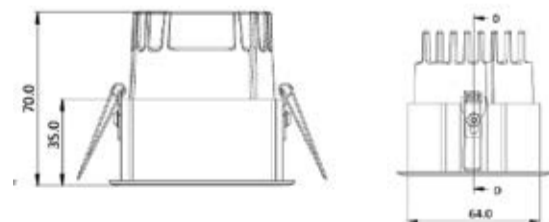

Anthus- 96

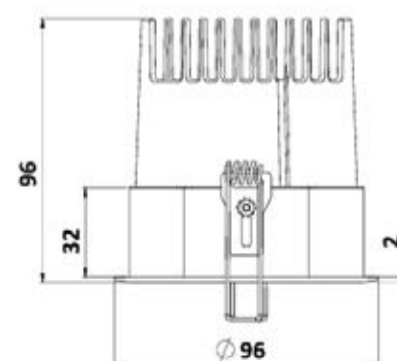

## ANTHUS



### ANTHUS- 33

System Power	Dimension	Beam Angle
5W	Outer Dia-42mm, Cutout Dia-33mm, Height- 61mm	13°, 18°, 24°, 28°

### ANTHUS GENERAL- 64

System Power	Dimension	Beam Angle
10W	Outer Dia-64mm, Cutout Dia-60mm, Height- 70mm	38°, 78°

### ANTHUS SPOT- 64

System Power	Dimension	Beam Angle
10W	Outer Dia-64mm, Cutout Dia-60mm, Height- 70mm	6°, 15°, 26°, 36°, 60°

### ANTHUS- 96

System Power	Dimension	Beam Angle
15W	Outer Dia-96mm, Cutout Dia-81mm, Height- 96mm	6°, 15°, 26°, 36°, 60°

## Order Options

### CCT (Colour Temperature)

3000K

4000K

5700K

Tunable White 2700K-6500K



### CRI

>90

### Beam Angle

6°

13°

15°

18°

24°

26°

28°

36°

38°

60°

78°

### Control

ON-OFF



ON-OFF (FLICKER FREE)



DALI-2 DT6



DALI-2 DT8



DALI+



### Mounting

Recessed

### Material Colour

RAL As Per Request