

ANTHUS IP65





ANTHUS IP65

Anthus IP65 Downlight features has:

- Die cast- aluminium Luminaire housing
- Premium powder coated finish
- IP65, High Ingress Protection against dust & moisture
- Flicker free operation for eye protection
- Energy-efficient LED with high colour rendering.
- The built quality ensures long and maintenance free service life
- COB (Chip on Board) technology with Lens
- Available in Fixed version
- LED with effective colour rendering
- Precision-engineered, electroplated and nano-plated reflector
- Zero multiple shadows

Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6, DALI-2 DT8, DALI+

SDCM<3

Lens & Reflector


L70 @50,000h

Types

Recessed

Single Line Diagram


Anthus IP65- 60

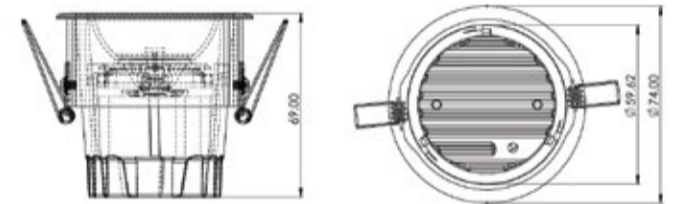

Anthus IP65 - 80



Anthus IP65 - 100

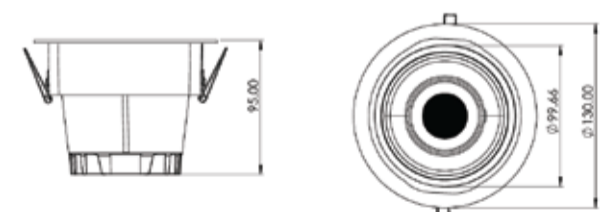

ANTHUS IP65



ANTHUS IP65-60

System Power	Dimension
5W	Outer Dia- 74mm, Cutout Dia-59.62mm, Height- 69mm

ANTHUS IP65- 80

System Power	Dimension
10W	Outer Dia- 100mm, Cutout Dia- 79.42mm, Height- 80mm

ANTHUS IP65- 100

System Power	Dimension
15W	Outer Dia- 130mm, Cutout Dia- 99.66mm, Height- 95mm

Order Options

CCT (Colour Temperature)

3000K

4000K

5700K

Tunable White 2700K-6500K



CRI

>90

Beam Angle

20°

40°

60°

Control

ON-OFF



ON-OFF (FLICKER FREE)



DALI-2 DT6



DALI-2 DT8



DALI+



Mounting

Recessed

Material Colour

RAL As Per Request