


ANTHUS SPOT-64

Direct | Recessed

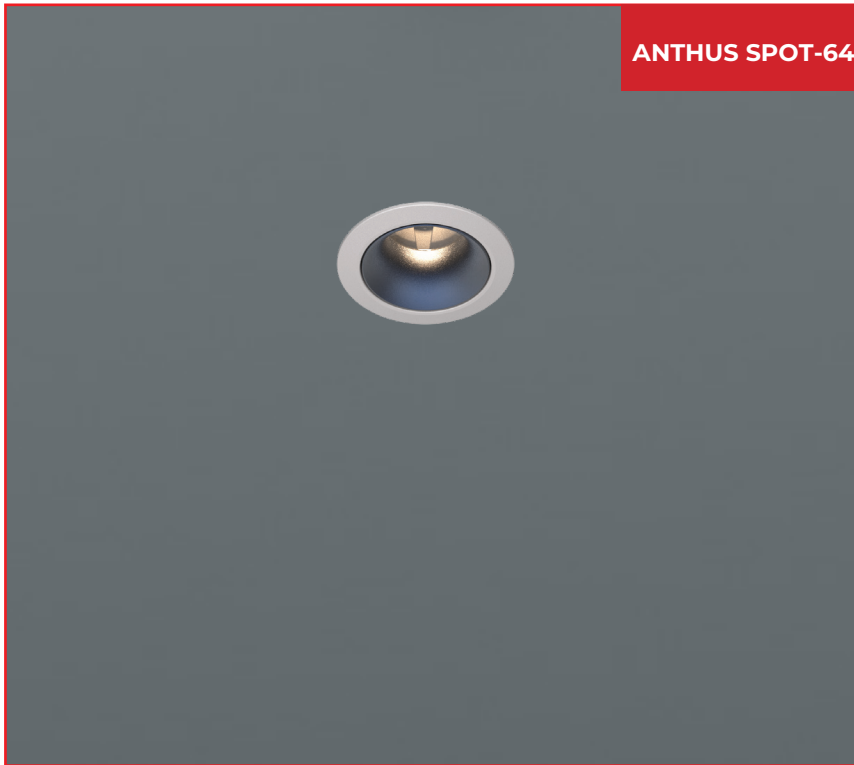

ANTHUS SPOT-64 is Premium range Recessed COB Spot light Downlighter available in Fixed and Adjustable version made up of die cast aluminium housing, heat sink and with premium powder coated finish.

Powered by high quality COB with a binning tolerance of ≤ 3 SDCM and CRI ≥ 90 . The luminaire maintains atleast 70% of its luminous flux after 50,000 operating hours, guaranteeing long term reliability. High efficiency optics with beam angle options of $6^\circ / 15^\circ / 26^\circ / 36^\circ / 60^\circ$ and precision engineered.

Anthus SPOT-64 Downlighter available in wattage from ranging from 10W is crafted for direct light distribution making it ideal for residential & professional applications.

Options in reflector cover available as per request to enhance installation and functionality.

ANTHUS SPOT-64



Quick Info

Mounting Type

Recessed

Material Colour

Customize RAL available

Protection mode

IP40

Driver Details

ON/OFF/, DALI-2 DT6 / DALI-2 DT8/ DALI +

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED

CCT- 3000K/ 4000K/ 5700K/ TUNABLE WHITE 2700K-6500K

CRI- ≥ 90

Life Span - L70@50000h

MacAdam - ≤ 3 SDCM

Beam Angle

$6^\circ / 15^\circ / 26^\circ / 36^\circ / 60^\circ$

Optics

Lens & Reflector

Efficacy

80lm/w

Electrical

Wattage - 10W

Input Voltage- 220-240 VAC

Physical

Outer Dia- 64mm


Pin Dia - 60mm

Height- 70mm

Single Line Diagram

Recessed

ANTHUS SPOT-64

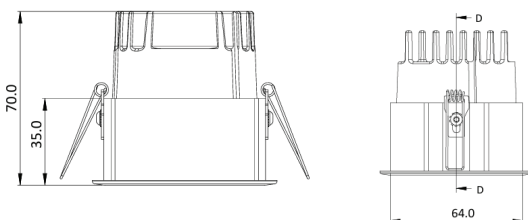

divinity lights

Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi, Rajasthan 301019.

www.divinitylights.com