


## ANTHUS TL -87

Direct | Recessed

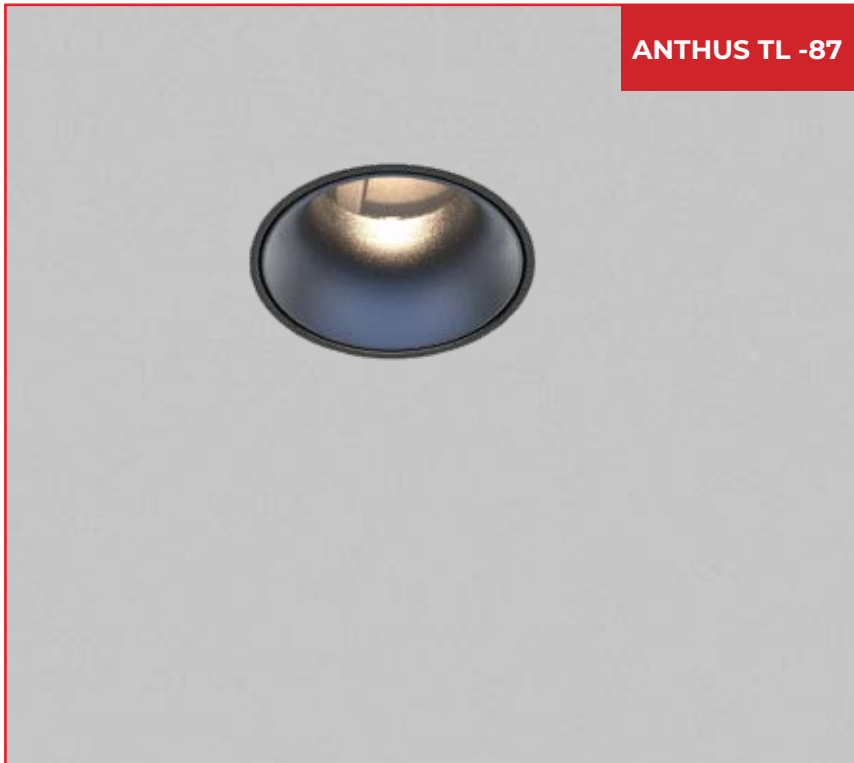

ANTHUS TL -87

**ANTHUS TL-87** is Premium range Recessed COB Spot light Downlighter available in Fixed and Adjustable version made up of die cast aluminium housing, heat sink and with premium powder coated finish.

Powered by high quality COB with a binning tolerance of  $\leq 3$  SDCM and CRI  $\geq 90$ . The luminaire maintains atleast 70% of its luminous flux after 50,000 operating hours, guaranteeing long term reliability. High efficiency optics with beam angle options of  $6^\circ / 15^\circ / 26^\circ / 36^\circ / 60^\circ$  and precision engineered.


Anthus TL- 87 Downlighter available in wattage from ranging from 15W is crafted for direct light distribution making it ideal for residential & professional applications.

Options in reflector cover available as per request to enhance installation and functionality.

### Single Line Diagram

Recessed

ANTHUS TL-87

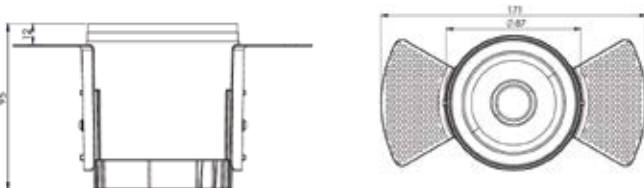

## ANTHUS TL-87



### Quick Info

#### Mounting Type

Recessed

#### Material Colour

Customize RAL available

#### Protection mode

IP40

#### Driver Details

ON/OFF/, DALI-2 DT6 / DALI-2 DT8/ DALI +

Power Factor (PF) -0.95

THD- <10%

UGR - <19

#### LED

CCT- 3000K/ 4000K/ 5700K/ TUNABLE WHITE 2700K-6500K

CRI-  $\geq 90$

Life Span - L70@50000h

MacAdam -  $\leq 3$  SDCM

#### Beam Angle

$6^\circ / 15^\circ / 26^\circ / 36^\circ / 60^\circ$

#### Optics

Lens & Reflector

#### Efficacy

100lm/w

#### Electrical

Wattage - 15W

Input Voltage- 220-240 VAC

#### Physical

Outer Dia-85mm

Overall Width- 171mm

Height- 95mm