




ANTHUS TRIMLESS



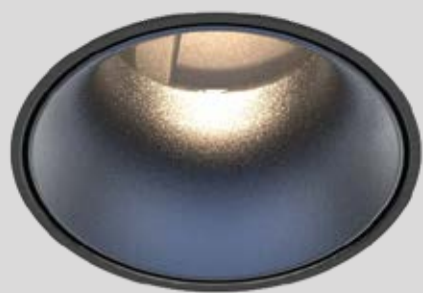

ANTHUS TRIMLESS

Anthus Trimless Downlight features has:

- Die cast- aluminium Luminaire housing
- Premium powder coated finish
- COB (Chip on Board) technology with Lens
- Available in Fixed Trimless version
- LED with effective colour rendering
- Provides comfortable illumination with reduced eye strain, ideal for premium interiors.
- Delivers focused and controlled light distribution for accent
- Ensures excellent lumen output with low energy consumption.

Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6, DALI-2 DT8, DALI+

SDCM<3

Lens & Reflector


L70 @50,000h

Types


Recessed

Single Line Diagram


Anthus TL- 35

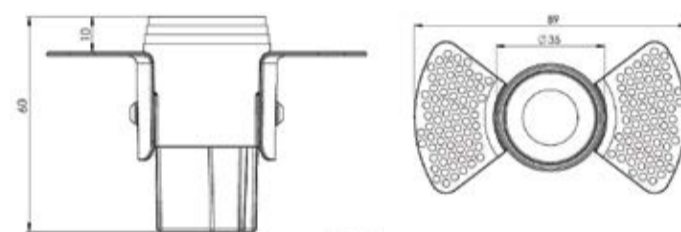


Anthus TL General - 65

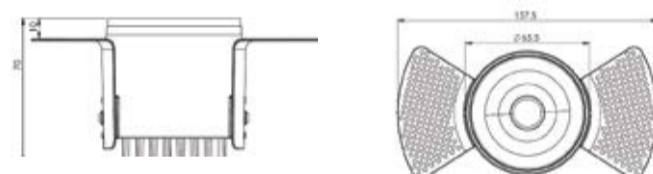

Anthus TL Spot- 65

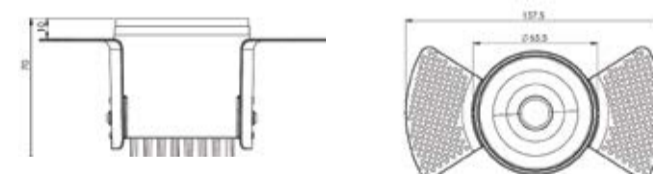

Anthus TL Spot- 87

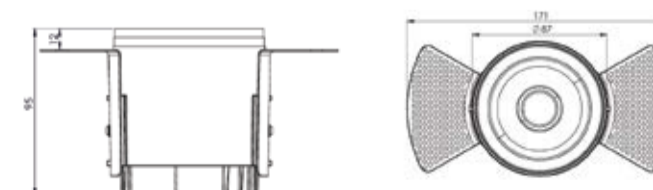

ANTHUS TL



ANTHUS TL- 35

System Power	Dimension	Beam Angle
5W	Outer Dia- 35mm, Overall Width- 89mm Height- 60mm	13°, 18°, 24°, 28°

ANTHUS TL GENERAL- 65

System Power	Dimension	Beam Angle
10W	Outer Dia- 65.5mm, Overall Width- 137.5mm Height- 70mm	38°, 78°

ANTHUS TL SPOT- 65

System Power	Dimension	Beam Angle
10W	Outer Dia- 65.5mm, Overall Width- 137.5mm Height- 70mm	6°, 15°, 26°, 36°, 60°

ANTHUS TL- 87

System Power	Dimension	Beam Angle
15W	Outer Dia- 87mm, Overall Width- 171mm Height- 95mm	6°, 15°, 26°, 36°, 60°

Order Options

CCT (Colour Temperature)

3000K

4000K

5700K

Tunable White 2700K-6500K



CRI

>90

Beam Angle

6°

13°

15°

18°

24°

26°

28°

36°

38°

60°

78°

Control

ON-OFF



ON-OFF (FLICKER FREE)



DALI-2 DT6



DALI-2 DT8



DALI+



Mounting

Recessed

Material Colour

RAL As Per Request