

**AUSTIN  
COLUMN**

**divinitylights**



### Quick Info

CRI  $\geq 90$

2700K, 3000K, 4000K

Non-Dimmable/ Dali-Dimmable

SDCM<3

Clear Diffuser


L70 @50,000h

Aluminium Die-Cast

### Types

Surface


### Single Line Diagram

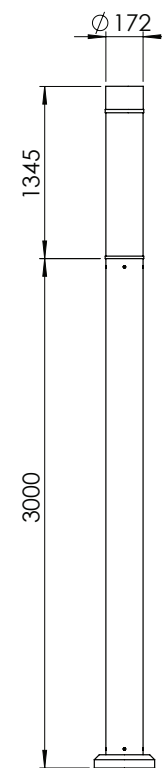

## AUSTIN COLUMN

Austin Column fixture has :

- Luminaire housing of Aluminium
- IP66, High Ingress Protection against dust & moisture
- Flicker free operation for eye protection
- Energy-efficient LED with high colour rendering
- The built quality ensures long and maintenance free service life
- Optimum for every outdoor space including society parks, streets, educational institutes, and pathways
- Sustainable LED technology offers durability and optimal light output with low power consumption
- Ideal design for rough outdoor environment
- Precise optics and beautiful form factor



CRI  $\geq 90$

AUSTIN COLUMN



Product Order Code	System Power	Dimensions
1905	30W	Dia=172mm, H= 4,345mm

Order Options

CCT (Colour Temperature)

- 2700K
- 3000K
- 4000K


CRI

>90

Beam Angle

N.A

Control

- Non-Dimmable 
- Dali-Dimmable 

Mounting Type

Surface

Material Colour

- Grey 