



AUSTIN

Austin Wall light has :

- Luminaire housing of Die-Cast Aluminium
- IP66, High Ingress Protection against dust & moisture
- Wall mounted LED light
- Easy to install & maintain
- Lens optics for even light distribution
- Energy-efficient LED with high colour rendering
- High efficacy & lower consumption
- Suitable for hotels, department stores, yards, doorways, porches, gardens, pathways
- Fitting projects the light in a narrow 20° upward & 80° downward distribution

Quick Info

CRI ≥ 80 /90

2700K, 3000K, 4000K

Up to 85 lm/W

Non-Dimmable/ Dali-Dimmable

SDCM<3

Lens & Reflector



L70 @50,000h

Aluminium Die-Cast

Types

Surface

Single Line Diagram

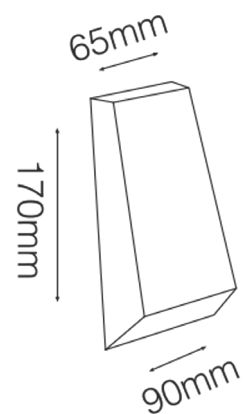

CRI ≥ 80/90

AUSTIN



Product Order Code	System Power	Dimensions
1751	2X3W	L=170mm W=90mm

Order Options

CCT (Colour Temperature)

2700K
3000K
4000K

CRI

>80
>90

Beam Angle

UP - 20° / DOWN - 80°

Control

Non-Dimmable



Dali-Dimmable



Mounting Type

Surface

Material Colour

Black



Grey

