

**BLAZE
BOLLARD**

divinitylights





BLAZE BOLLARD

Blaze Bollard fixture has :

- Luminaire housing of Aluminium
- IP66, High Ingress Protection against dust & moisture
- Flicker free operation for eye protection
- Energy-efficient LED with high colour rendering
- The built quality ensures long and maintenance free service life
- Optimum for every outdoor space including society parks, streets, educational institutes, and pathways
- Garden & pathway luminaires create pleasant light distribution with a high degree of visual comfort
- Modular system bollard range emit their shielded light symmetrically through 180° or 360°
- Sustainable LED technology offers durability and optimal light output with low power consumption

Quick Info

CRI ≥ 90

2700K, 3000K, 4000K

Non-Dimmable/ Dali-Dimmable

SDCM<3

Clear Tempered Glass


L70 @50,000h

Aluminium Die-Cast

Types

Surface

Single Line Diagram

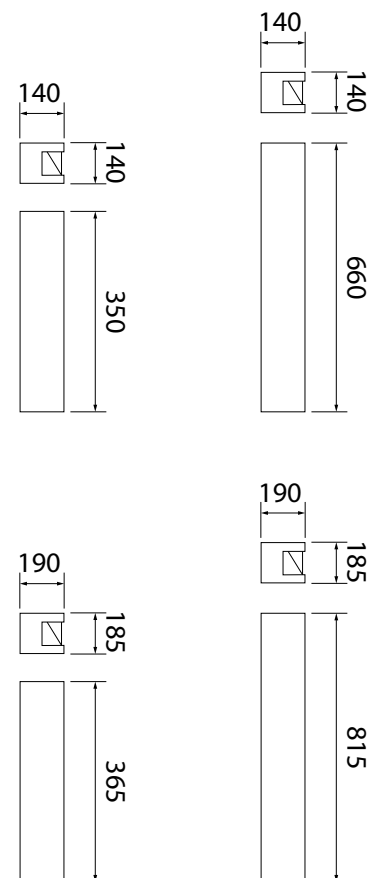

CRI ≥ 90

BLAZE BOLLARD



Product Order Code	System Power	Dimensions
1849	7W	Dia=140mm H=490mm
1850	7W	Dia=140mm H=800mm
1851	20W	Dia=190mm H=550mm
1852	20W	Dia=190mm H=1000mm

Order Options

CCT (Colour Temperature)

2700K
3000K
4000K

CRI

>90
>90

Beam Angle

180°
360°

Control

Non-Dimmable
Dali-Dimmable



Mounting Type

Surface

Material Colour

Grey