



BRIGHT-IP68
LED STRIP

divinity lights

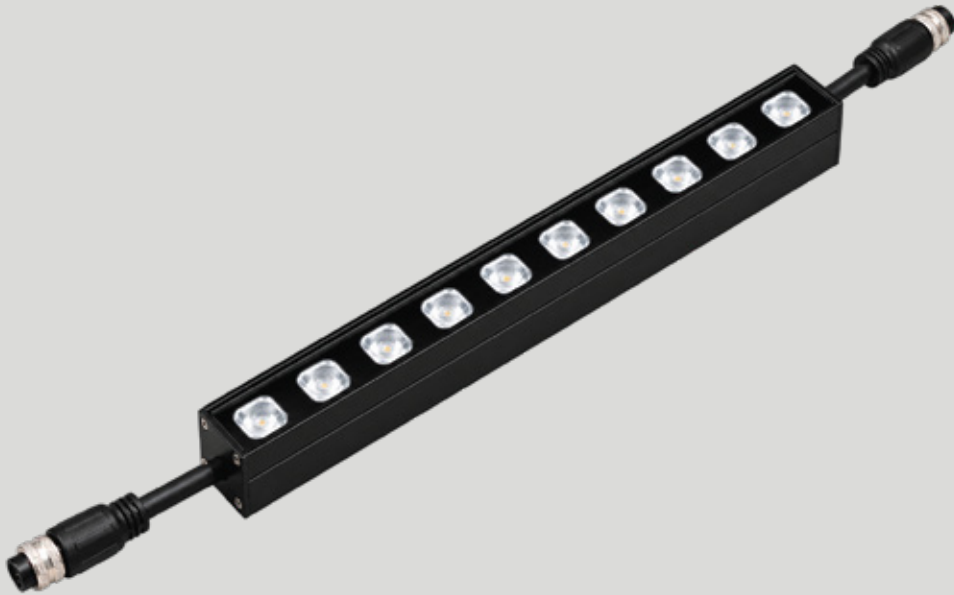



BRIGHT- IP68

Bright - IP68 LED Strip Fixture has :

- Silver/black sleek finish; ultra-compact (H23×W32mm), ideal for tight spaces
- Lighting modes: MONO, RGBW, DMX RGBW
- Beam angles: 20°, 30°, 40°, 20×35°
- DMX pixel control delivers dynamic colors for architecture lighting
- IP68 waterproof (1m freshwater): indoor/outdoor use
- IK10 impact resistance, suitable for in-ground areas
- Ideal for architectural and landscape applications: Contour Lighting,
- Cove Lighting, In-ground Lighting, Wall Washing, Wall Grazing

Quick Info

CRI ≥ 80

2700K, 3000K, 4000K, RGB, RGBW

IP Rating IP68

Non-Dimmable/ Dali-Dimmable

DMX Controller



SDCM<3

L70 @50,000h

Type


Surface

Single Line Diagram

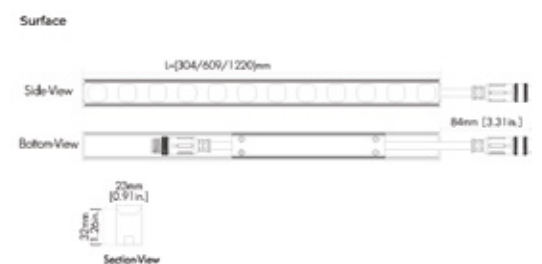

CRI ≥ 80

BRIGHT- IP68



System Power	Dimensions
24W/MTR	W= 23MM H= 32MM

Order Options

CCT (Color Temperature)

2700K

3000K

4000K

RGB

RGBW

CRI

>80

Beam Angle

20 °

30 °

40 °

20X35 °

Control

Non-Dimmable

Dali- Dimmable

DMX512 Controller



Mounting Type

Surface Mounted

Input Voltage

24V DC