

## BLAZE BOLLARD

Blaze Bollard fixture has :

- Luminaire housing of Aluminium
- IP66, High Ingress Protection against dust & moisture
- Flicker free operation for eye protection
- Energy-efficient LED with high colour rendering
- The built quality ensures long and maintenance free service life
- Optimum for every outdoor space including society parks, streets, educational institutes, and pathways
- Garden & pathway luminaires create pleasant light distribution with a high degree of visual comfort
- Modular system bollard range emit their shielded light symmetrically through 180° or 360°
- Sustainable LED technology offers durability and optimal light output with low power consumption

### Quick Info

CRI ≥ 80 /90

2700K, 3000K, 4000K

Up to 85 lm/W

Non-Dimmable/ Dali-Dimmable

SDCM<3

Clear Tempered Glass



L70 @50,000h

Aluminium Die-Cast

### Types

Surface

### Single Line Diagram

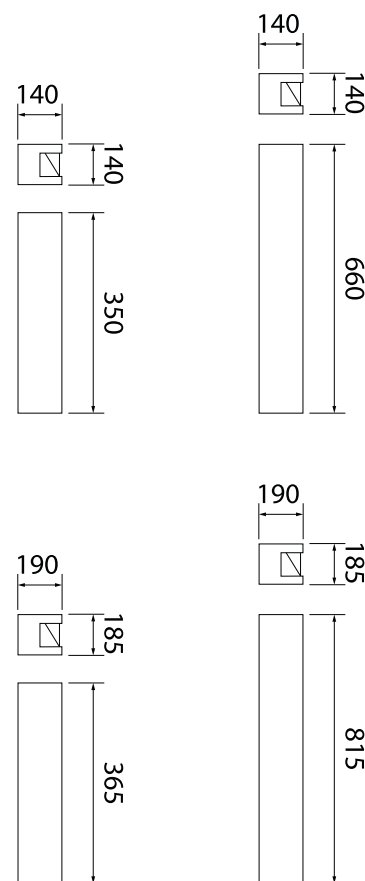

CRI ≥ 80/90

## BLAZE BOLLARD



Product Order Code	System Power	Dimensions
1849	7W	Dia=140mm H=490mm
1850	7W	Dia=140mm H=800mm
1851	20W	Dia=190mm H=550mm
1852	20W	Dia=190mm H=1000mm

## Order Options

### CCT (Colour Temperature)

2700K

3000K

4000K

### CRI

>80

>90

### Beam Angle

180°

360°

### Control

Non-Dimmable



Dali-Dimmable



### Mounting Type

Surface

### Material Colour

Grey

