

BRIGHT IP68

Direct | Surface



BRIGHT IP68



Quick Info

Mounting Type

Surface

Material Colour

Powder Coated Black/Silver

Protection mode

IP68

Driver Details

Non-Dimmable/ Dali-Dimmable/ DMX Controller

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED

CCT- 2700K, 3000K, 4000K, RGB, RGBW

CRI- ≥90

Life Span - L70@50000h

MacAdam - ≤3 SDCM

Beam Angle

20°, 30°, 40°, 20×35°, 35°

Optics

Lens

Material

Aluminium

Efficacy

80lm/w

Electrical

Wattage - 24W/Mtr

Input Voltage- 24V DC

Physical Dimension

Length- 304/ 609/ 1220 (mm)

Width - 23mm

Height - 32mm


BRIGHT IP68 is a high-performance linear architectural lighting solution designed for demanding indoor and outdoor applications, combining a slim ultra-compact profile with powerful and precise illumination. Featuring a silver/black sleek finish and aluminium housing, it is ideal for tight architectural spaces, façade lighting, contour lighting, wall washing, in-ground lighting and other architectural applications. The fixture supports mono-chrome, RGB, RGBW and DMX pixel-control options, enabling dynamic and programmable lighting effects.

The BRIGHT IP68 is designed for surface mounting with IP68 protection and IK10 impact resistance, making it suitable for harsh outdoor environments and in-ground applications.



With physical dimensions of approximately 23 mm width × 32 mm height, BRIGHT IP68 is available in 304 mm, 609 mm and 1220 mm lengths, making it adaptable to different architectural requirements.

Divinity Lights provides customized lighting solutions according to clients' specific requirements, making BRIGHT IP68 suitable for architectural façades, wall washing, contour lighting, landscape lighting, in-ground applications, pathways, outdoor structures and other high-end architectural projects.

Single Line Diagram

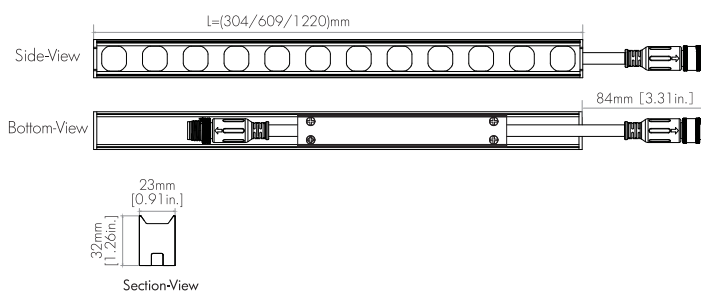

FEATURE

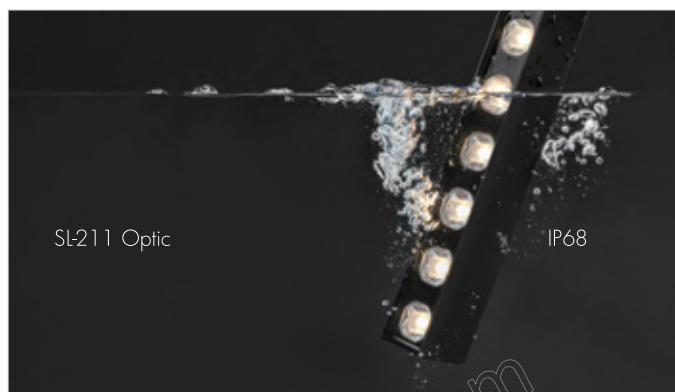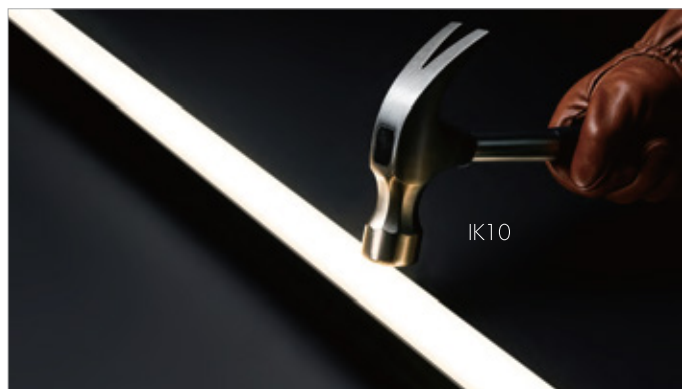

APPLICATION IMAGES

