

CHAIN WALL WASHER

Direct | Floor Mounted/Surface




CHAIN WALL WASHER by Divinity Lights features a sleek, contemporary design with a precision-engineered housing and premium powder-coated finish, delivering durability and a refined appearance for architectural lighting applications.

Powered by high-quality LEDs with a binning tolerance of ≤ 3 SDCM and CRI ≥ 80 , the luminaire maintains at least 70% of its luminous flux after 50,000 operating hours, ensuring reliable long-term performance. Equipped with high-efficiency optics, a lens, and tempered glass, it delivers precise 24°/36°/50° beam angle options for uniform wall illumination and reduced glare.

With a compact size of 56mm width and 65.3mm height, each 3W fixture is designed for floor mounting and surface installation, making it ideal for façades, pathways, landscapes, commercial buildings, and architectural structures. Supporting 220V AC/24V DC input, this IP66-rated luminaire offers reliable performance in outdoor environments. Divinity Lights provides customization in RAL finishes, wattages, and other specifications according to clients' specific requirements.

Single Line Diagram

Surface/ Floor Mounted

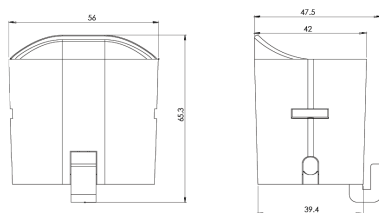

CHAIN WALL WASHER



Quick Info

Mounting Type

Surface/ Floor Mounted

Material Colour

Customize RAL available

Protection mode

IP66

Driver Details

Non-Dimmable/ Dali-Dimmable

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED

CCT- 2700K, 3000K, 4000K

CRI- ≥ 80

Life Span - L70@50000h

MacAdam - ≤ 3 SDCM

Beam Angle

24°/ 36°/ 50°

Optics

Lens & Tempered Glass

Efficacy

80lm/W

Electrical

Wattage - 3W each

Input Voltage- 220V AC/ 24V DC

Physical Dimensions

Width - 56mm

Height- 65.3mm