

GLG MACTY



Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable white (2700K-6500K)

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM <3

Diffuser with Dark Reflector



L70 @50,000h

Aluminium Die-cast

Type

Pendent/Surface

Single Line Diagram

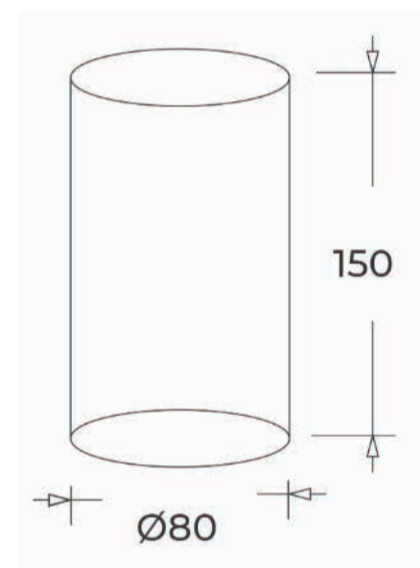

GLG MACTY


GLG Macty fixture has:

- Die cast- aluminium Luminaire housing
- Die cast heat sink
- Premium powder coated finish
- COB (Chip on Board) technology
- LED with effective colour rendering
- Diffuser downlight
- Source is deep recessed into the fixture
- Efficient COB & reflector for light distribution
- Light appears to pool on a surface below without any discernible source
- Vivid & accurate lighting effect
- Suitable for retail, hospitality & residential application

Light Distribution



DIRECT





CRI ≥ 90



TUNABLE WHITE

MERRY DUM




Product Order Code	System Power	Dimensions
4070 -  1	12W	Dia = 80mm Hight=150mm

Order Options

Distribution

Direct

CCT (Colour Temperature)

- 3000K 1
- 4000K 2
- 5700K 3
- Tunable White 2700K-6500K  4





CRI

- >90 1

Beam Angle

- 15° 1
- 24° 2
- 36° 3
- 55° 4

Control

- NON-Dimmable  1
- DALI-2 DT6  2
- DALI-2 DT8  3
- DALI +  4

Mounting Type

- Pendant 1
- Surface 2

Material Colour

- Black 1
- White 2
- Grey 3