

CURVE SLIM

divinity lights





CURVE SLIM

Curve Slim has :

- LED curved slim linear
- Extruded Aluminium Luminaire Housing
- Premium Finish Powder coating
- High efficiency PMMA Diffuser
- Different lengths available
- Infinite architectural designs and circular patterns possible
- Energy efficient LED with high colour rendering
- LED PCB mounted
- For pendant or recessed mounted applications
- Pendant using suspension cable with M6 bolt and fastener
- Bottom opening for easy maintenance

Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable white (2700K-6500K)

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM<3

Neon

L70 @50,000h

Aluminium


Types

Pendant/Recessed


Single Line Diagram

Profile Code

SY-33

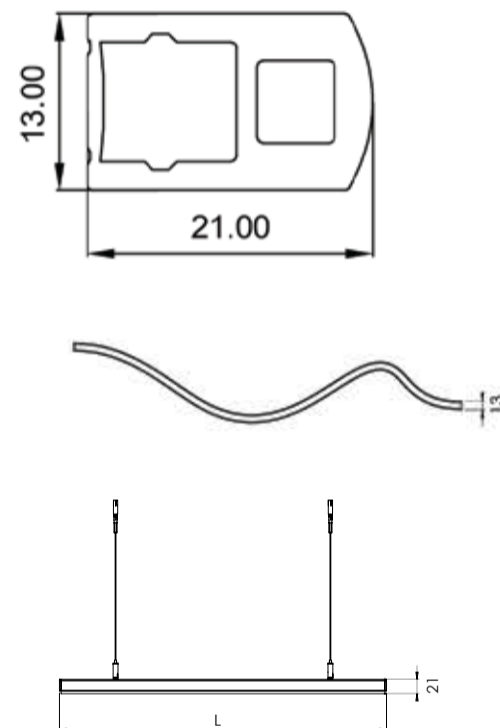

Colours



CRI ≥ 90



TUNABLE
WHITE

CURVE SLIM



CURVE SLIM

System Power	Dimensions
6W	L= 300mm Profile H= 30mm
12W	L= 600mm Profile H= 30mm
18W	L= 900mm Profile H= 30mm
25W	L= 1200mm Profile H= 30mm
50W	L= 2400mm Profile H= 30mm

Order Options

Distribution

Direct

CCT (Color Temperature)

3000K
4000K
5700K
Tunable 2700K-6500K



CRI

>90

Beam Angle

Diffused

Control

ON-OFF
ON-OFF (FLICKER FREE)
DALI-2 DT6
DALI-2 DT8
DALI +



Mounting Type

Pendent
Surface

Material Color

RAL As Per Request

Photometric Details

