

**CURVE SOFT 85**

**divinity lights**





## CURVE SOFT 85

Curve soft 85 has :

- LED curved linear
- Extruded Aluminium Luminaire Housing
- Premium Finish Powder coating
- High efficiency Micro Prismatic/ PMMA Diffuser
- Uniform illumination
- Dot-free lighting and smart arc linear
- Infinite architectural designs and circular patterns possible
- Energy efficient LED with high colour rendering
- LED PCB mounted
- For pendant or recessed mounted applications
- Pendant using suspension cable with M6 bolt and fastener
- Bottom opening for easy maintenance

### Quick Info

CRI  $\geq 90$

3000K/ 4000K/ 5700K

Tunable white (2700K-6500K)

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM<3

Micro Prismatic Diffuser/PMMA


L70 @50,000h

Aluminium

### Types


Pendant/Recessed

### Single Line Diagram

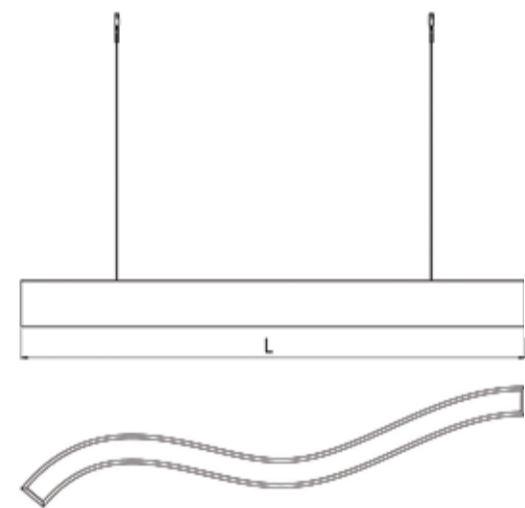

### Profile Code

SY- 55



CRI  $\geq 90$



TUNABLE  
WHITE

**CURVE SOFT 85**



**CURVE SOFT 85**

System Power	Dimensions
7W	L= 300mm W= 84mm, H= 95mm
14W	L= 600mm W= 84mm, H= 95mm
21W	L= 900mm W= 84mm, H= 95mm
28W	L= 1200mm W= 84mm, H= 95mm
56W	L= 2400mm W= 84mm, H= 95mm

**Order Options**

**Distribution**

Direct

**CCT (Color Temperature)**

3000K  
4000K  
5700K  
Tunable 2700K-6500K



**CRI**

>90

**Beam Angle**

Diffused

**Control**

- ON-OFF
- ON-OFF (FLICKER FREE)
- DALI-2 DT6
- DALI-2 DT8
- DALI +



**Mounting Type**

- Pendent
- Recessed

**Material Color**

RAL As Per Request

**Photometric Detail**

LUMINOUS INTENSITY DISTRIBUTION

