


CURVE SOFT

divinity lights



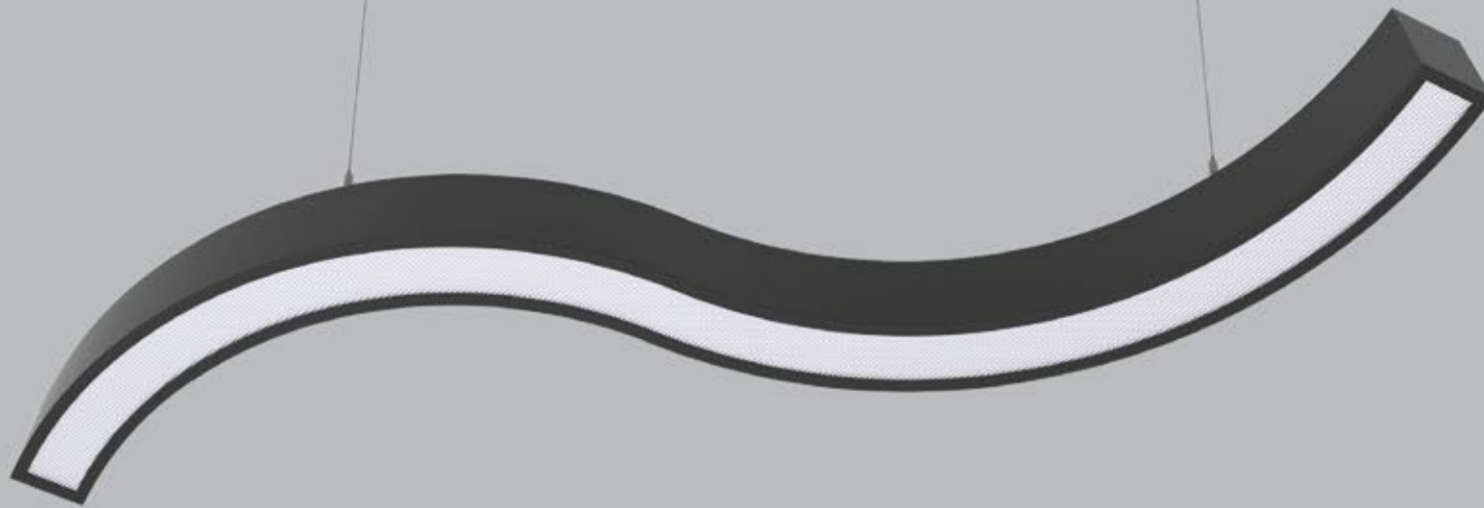

CURVE SOFT

Curve Soft has :

- LED curved linear
- Extruded Aluminium Luminaire Housing
- Premium Finish Powder coating
- High efficiency Micro Prismatic/ PMMA Diffuser
- Uniform illumination
- Infinite architectural designs and circular patterns possible
- LED PCB mounted
- For pendant or recessed mounted applications
- Pendant using suspension cable with M6 bolt and fastener
- Bottom opening for easy maintenance

Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable white (2700K-6500K)

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM<3

Micro Prismatic Diffuser

L70 @50,000h

Aluminium

Types

Pendant/Recessed

Single Line Diagram


Profile Code

SY- 31



Profile Code

SY- 04



CRI ≥ 90



TUNABLE
WHITE

CURVE SOFT



CURVE SOFT

System Power	Dimensions
6W	L= 300mm W=60mm, H= 95mm
12W	L= 600mm W=60mm, H= 95mm
18W	L= 900mm W=60mm, H= 95mm
25W	L= 1200mm Profile W= 13mm, H= 23mm
50W	L= 2400mm W=60mm, H= 95mm

Order Options

Distribution

Direct

CCT (Color Temperature)

3000K
4000K
5700K
Tunable 2700K-6500K



CRI

>90

Beam Angle

Diffused

Control

- ON-OFF
- ON-OFF (FLICKER FREE)
- DALI-2 DT6
- DALI-2 DT8
- DALI +



Mounting Type

- Pendent
- Recessed

Material Color

RAL As Per Request

Photometric Details

Photometric Details

LUMINOUS INTENSITY DISTRIBUTION

