

**DAISY CRESENT
PRISMATIC**

divinity lights



divinity lights

Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable White 2700K-6500K

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI +

SDCM<3

Micro Prismatic Diffuser

L70 @ 50,000h




Aluminium

Types

Pendant/ Surface

Single Line Diagram

Pendant/ Surface

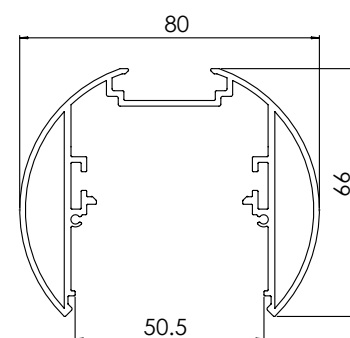

DAISY CRESENT PRISMATIC

Daisy Crescent Prismatic sleek linear fixture has:


- Extruded Aluminium Luminaire Housing
- Premium Finish Powder coating
- High efficiency Prismatic double diffuser
- Better refractive index to reduce glare
- Energy efficient LED with high colour rendering
- LED PCB mounted on insert design with heat sink
- Snap fit system
- No visible screw
- Pendant using suspension cable with M6 bolt and fastener
- Bottom opening for easy maintenance

Colours



Light Distribution

Direct



CRI ≥ 90



TUNABLE WHITE

DAISY CRESENT PRISMATIC



DAISY CRESENT PRISMATIC (DIRECT)

Product Order Code	System Power	Dimensions
1014-  1	7W	L = 300mm, W = 80mm, H = 99mm
1014-  2	14W	L = 600mm, W = 80mm, H = 99mm
1014-  3	21W	L = 900mm, W = 80mm, H = 99mm
1014-  4	28W	L = 1200mm, W = 80mm, H = 99mm
1014-  5	56W	L = 2400mm, W = 80mm, H = 99mm

Order Options

Distribution

Direct

CCT (Colour Temperature)	
3000K	1
4000K	2
5700K	3
Tunable White 2700K-6500K	4

CRI	
>90	1

Beam Angle


110°

Control		
ON-OFF		1
ON-OFF (FLICKER FREE)		2
DALI-2 DT6		3
DALI-2 DT8		4
DALI +		5

Mounting Type	
Pendant	1
Surface	2

Material Colour	
Black	 1
White	 2
Grey	 3

Accessories

Product Order Code	Accessories Name	Accessories Image
1014-01 	LED PCB	
1014-02	Suspension Wire	
1014-03	PMMA Diffuser	
1014-04	Micro Prismatic Diffuser	
1014-05	Profile Connector	
1014-06 	Profile Endcap	

Order Options

CCT (Colour Temperature)

3000K

4000K

5700K

Tunable White 2700K-6500K



2700K — 6500K

☒

1

☐

2

☐

3

☐

4

CRI

>90



1

Material Colour

Black

White

Grey







☐

1

☐

2

☐

3