

# DRACO T145



## Quick Info

CRI ≥90

3000K/ 4000K/ 5700K

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM<3

L70 @50,000h

Micro Prismatic Diffuser

Aluminium

## Types


Recessed with Frame in GYPSUM Ceiling

Recessed in T-Bar Techzone Ceiling

## Single Line Diagram

Recessed Mounted

Profile Code  
SY-116

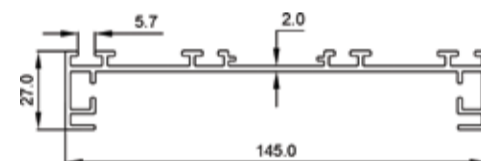


## DRACO T145

This light features has:

- Luminaire housing of extruded aluminium
- Aluminium and powder-coated sheet metal body
- High-performance Prismatic double-diffuser
- Glare-free & uniform light distribution
- Energy-efficient LED with color rendering
- LED PCB mounted on insert design with heat sink
- Bottom opening for easy maintenance
- Pendant with cable suspension

## Light Distribution

Direct



CRI ≥ 90



TUNABLE  
WHITE

## DRACO T145



### DRACO T145 (DIRECT)

System Power	Dimension
30W	W = 145mm, H = 27mm
45W	W = 145mm, H = 27mm

### Order Options

#### Distribution

Direct

#### CCT (Color Temperature)

3000K  
4000K  
5700K  
Tunable 2700K-6500K



#### CRI

>90

#### Beam Angle

98.5°

#### Control

ON-OFF  
ON-OFF (FLICKER FREE)  
DALI-2 DT6  
DALI-2 DT8  
DALI +



#### Mounting Type

Recessed

#### Material Color

RAL As Per Request

#### Photometric

