

DISC BACKLIT

divinity lights



Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable white (2700K-6500K)

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM <3

Micro Prismatic Diffuser

L70 @50,000h


Aluminium

Types

Pendant/ Surface/ Recessed

Single Line Diagram

Pendant Surface Recessed

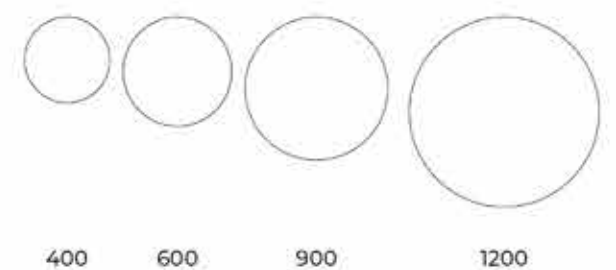

DISC BACKLIT

Disc Backlit fixture has :


- Aluminium Luminaire Housing
- Circular Disc Light
- Premium Finish Powder coating
- High performance Micro Prismatic diffuser
- Glare control & uniform light distribution
- Round frame with disc emitting a circular glow
- Direct yet diffused ambient shine
- Energy efficient LED with high colour rendering
- LED PCB mounted on insert design with heat sink
- Pendant using suspension cable with M6 bolt and fastener
- Bottom opening for easy maintenance

Colours



Light Distribution

Direct Direct-Indirect



CRI ≥ 90



TUNABLE
WHITE

DISC BACKLIT



DISC BACKLIT (DIRECT)

Product Order Code	System Power	Dimension
3001-1  1	35W	Ø-400mm
3001-1  2	50W	Ø = 600mm
3001-1  3	70W	Ø = 900mm
3001-1  4	105W	Ø = 1200mm

DISC BACKLIT (DIRECT-INDIRECT)

Product Order Code	System Power	Dimension
3001-  1	35W	Ø-400mm
3001-  2	50W	Ø = 600mm
3001-  3	70W	Ø = 900mm
3001-  4	105W	Ø = 1200mm

Order Options

Distribution	
Direct	1
Direct-Indirect	
Up-50% / Down-50%	2
Up-30% / Down-70%	3
Up-70% / Down-30%	4
Up-20% / Down-80%	5
Up-80% / Down-20%	6
CCT (Colour Temperature)	
3000K	1
4000K	2
5700K	3
Tunable White 2700K-6500K 	4
CRI	
>90	1
Beam Angle	
110°	
Control	
ON-OFF 	1
ON-OFF (FLICKER FREE) 	2
DALI-2 DT6 	3
DALI-2 DT8 	4
DALI + 	5
Mounting Type	
Pendant	1
Surface	2
Recessed	3
Material Colour	
Black 	1
White 	2
Grey 	3

Accessories

Product Order Code	Accessories Name	Accessories Image
3001-01 	LED PCB	
3001-02	Suspension Wire	
3001-03	PMMA Diffuser	
3001-04	Micro Prismatic Diffuser	

Order Options

CCT (Colour Temperature)		
3000K		1
4000K		2
5700K		3
Tunable White 2700K-6500K		4
CRI		
>90		1