

ECTO T145 DUO LENS



Quick Info

CRI ≥90

3000K/ 4000K/ 5700K

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM<3

L70 @50,000h

Lens + Micro Prismatic Diffuser





Aluminium

Types

Recessed with Frame in GYPSUM Ceiling

Recessed in T-Bar Techzone Ceiling

Single Line Diagram

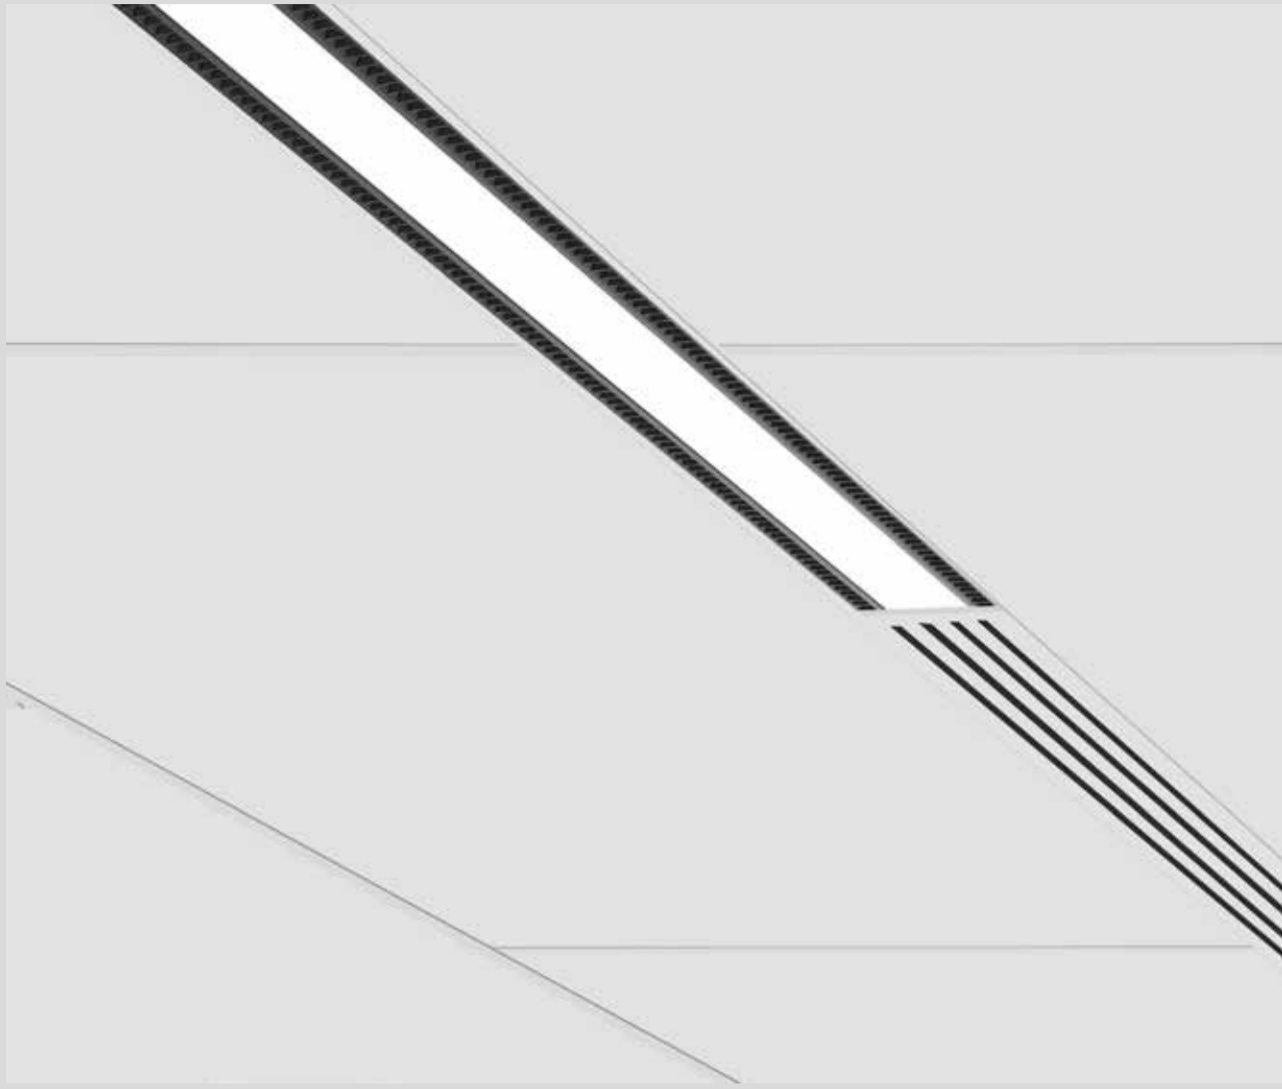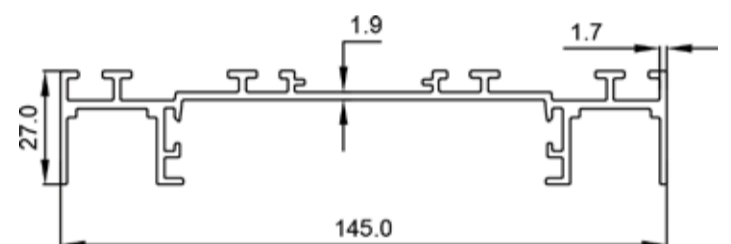

ECTO T145 DUO LENS

This light features has:


- Luminaire housing of extruded aluminium
- Aluminium and powder-coated sheet metal body
- High-performance Prismatic double-diffuser
- Glare-free & uniform light distribution
- Energy-efficient LED with color rendering
- LED PCB mounted on insert design with heat sink
- Bottom opening for easy maintenance
- Pendant with cable suspension

Color



Light Distribution

Direct



CRI ≥ 90



TUNABLE WHITE

ECTO T145 DUO LENS



ECTO T145 DUO LENS

| Product Order Code | System Power | Dimension |
|--------------------|--------------|-------------------|
| 10115- 1 | 30W | W=55mm, H=10.40mm |
| 10115- 2 | 45W | W=55mm, H=10.40mm |

Order Options

| CCT (Colour Temperature) | |
|--------------------------|-------------------------|
| 3000K | <input type="radio"/> 1 |
| 4000K | <input type="radio"/> 2 |
| 5700K | <input type="radio"/> 3 |
| TUNABLE 2700K-6700K | <input type="radio"/> 4 |

| CRI | |
|-----|-------------------------|
| >90 | <input type="radio"/> 1 |

Beam Angle

110°

| Control | |
|-----------------------|---|
| ON-OFF | 1 |
| ON-OFF (FLICKER FREE) | 2 |
| DALI-2 DT6 | 3 |
| DALI-2 DT8 | 4 |
| DALI+ | 5 |







Mounting

RECESSED

Material Colour


| | | |
|-------|-----------------------|---|
| Black | <input type="radio"/> | 1 |
| White | <input type="radio"/> | 2 |
| Grey | <input type="radio"/> | 3 |

Accessories

| Product Order Code | Accessories Name | Accessories Image |
|--|--------------------------|--|
| 10113- <input checked="" type="radio"/> <input type="radio"/> <input type="radio"/> <input type="checkbox"/> 1 | LED PCB |  |
| 10113-2 | Suspension Wire |  |
| 10113-3 | PMMA Diffuser |  |
| 10113-4 | Micro Prismatic Diffuser |  |
| 10113-5 | Profile Connector |  |
| 10113-6 | Profile Endcap |  |

Order Options

CCT (Colour Temperature)

- 3000K 1
- 4000K 2
- 5700K 3
- Tunable White 2700K-6500K  4

CRI

- >90 1

Material Colour

- Black 1
- White 2
- Grey 3