

ECTO T145 DUO LENS



Quick Info

CRI ≥90

3000K/ 4000K/ 5700K

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM<3

L70 @50,000h

Lens + Micro Prismatic Diffuser

Aluminium

Types

Recessed with Frame in GYPSUM Ceiling



Recessed in T-Bar Techzone Ceiling

Single Line Diagram

Recessed Mounted

Profile Code

SY-115

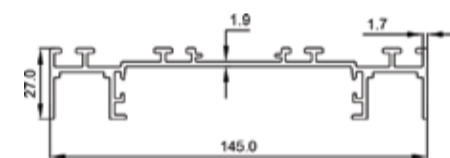

ECTO T145 DUO LENS

This light features has:

- Luminaire housing of extruded aluminium
- Aluminium and powder-coated sheet metal body
- High-performance Prismatic double-diffuser
- Glare-free & uniform light distribution
- Energy-efficient LED with color rendering
- LED PCB mounted on insert design with heat sink
- Bottom opening for easy maintenance

Light Distribution

Direct



CRI ≥ 90



TUNABLE
WHITE

ECTO T145 DUO LENS



ECTO T145 DUO LENS (DIRECT)

System Power	Dimension
30W	W = 145mm, H = 27mm
45W	W = 145mm, H = 27mm

Order Options

Distribution

Direct

CCT (Color Temperature)

3000K
4000K
5700K
Tunable 2700K-6500K



CRI

>90

Beam Angle

36°

Control

ON-OFF
ON-OFF (FLICKER FREE)
DALI-2 DT6
DALI-2 DT8
DALI +



Mounting Type

Recessed

Material Color

RAL As Per Request

Photometric

