


ELEANOR SH145



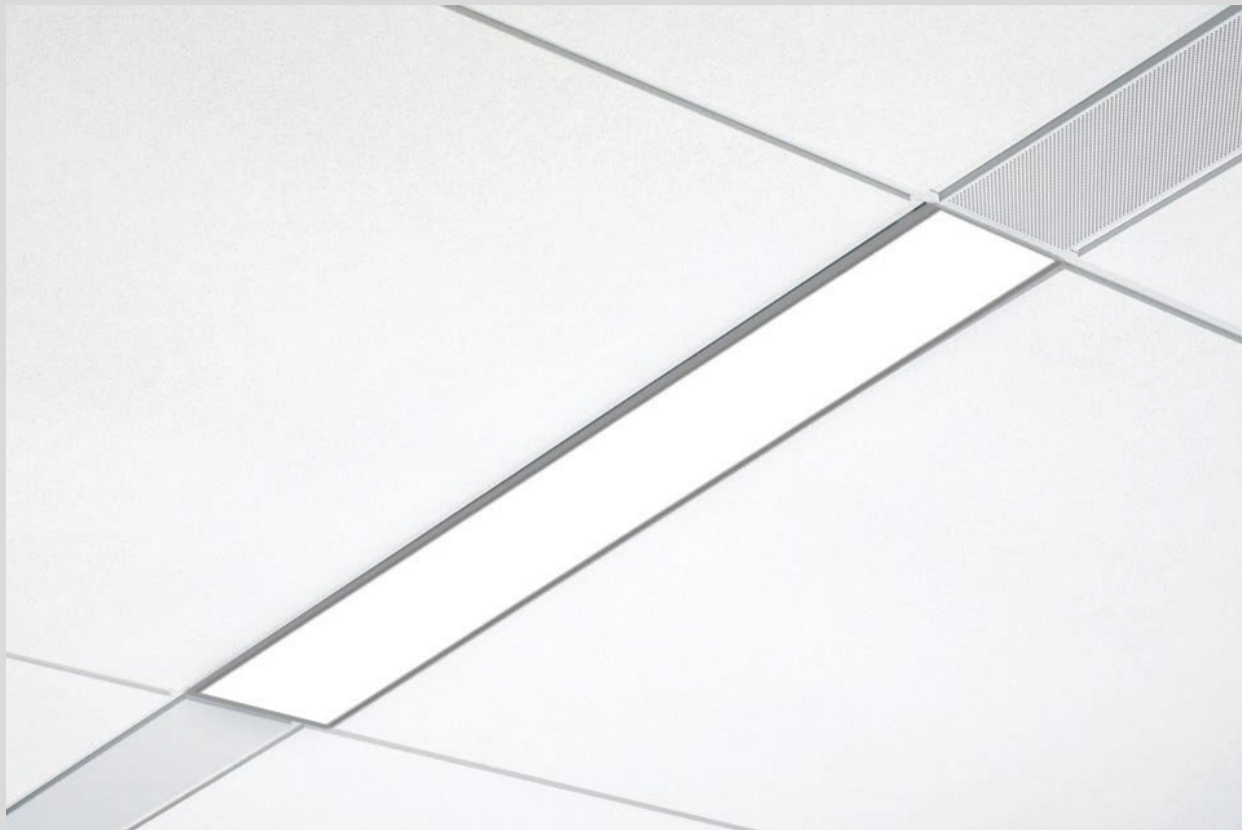

Quick Info

CRI ≥90
 3000K/ 4000K/ 5700K
 ON-OFF/ON-OFF (FLICKER FREE)
 DALI-2 DT6 / DALI-2 DT8/ DALI+
 SDCM<3
 L70 @50,000h
 Micro Prismatic Diffuser
 Aluminium


Types

Recessed with Frame in GYPSUM Ceiling
 Recessed in Silhouette Techzone Ceiling

Single Line Diagram

Recessed Mounted

Profile Code
 SDL- 8001

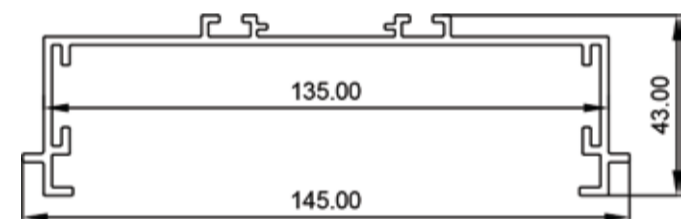


ELEANOR SH145

This light features has:

- Luminaire housing of extruded aluminium
- Aluminium and powder-coated sheet metal body
- High-performance Prismatic double-diffuser
- Glare-free & uniform light distribution
- Energy-efficient LED with color rendering
- LED PCB mounted on insert design with heat sink
- Bottom opening for easy maintenance

Light Distribution

Direct



CRI ≥ 90



TUNABLE
 WHITE

ELEANOR SH145



ELEANOR SH145

System Power	Dimension
30W	W=135mm, H=43mm
45W	W=135mm, H=43mm

Order Options

Distribution

Direct

CCT (Color Temperature)

3000K
4000K
5700K
Tunable 2700K-6500K



CRI

>90

Beam Angle

99.2°

Control

ON-OFF
ON-OFF (FLICKER FREE)
DALI-2 DT6
DALI-2 DT8
DALI +



Mounting Type

Recessed

Material Color

RAL As Per Request

Photometric

LUMINOUS INTENSITY DISTRIBUTION

