

FIONX T100



Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM<3

L70 @50,000h

Micro Prismatic Diffuser





Aluminium

Types

Recessed with Frame in GYPSUM Ceiling

Recessed in T-Bar Techzone Ceiling

Single Line Diagram

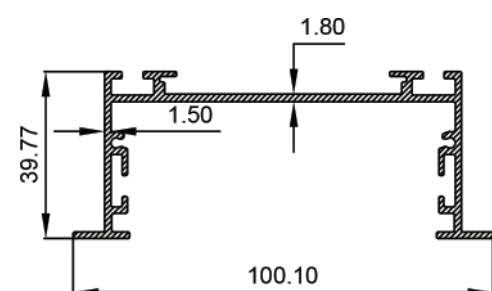

FIONX T100

This light features has:


- Luminaire housing of extruded aluminium
- Aluminium and powder-coated sheet metal body
- High-performance Prismatic double-diffuser
- Glare-free & uniform light distribution
- Energy-efficient LED with color rendering
- LED PCB mounted on insert design with heat sink
- Bottom opening for easy maintenance
- Pendant with cable suspension

Color



Light Distribution

Direct



CRI ≥ 90



TUNABLE
WHITE

FIONX T100



FIONX T100

Product Order Code	System Power	Dimension
10118-  1	30W	W=100.10mm, H=39.77mm
10118-  2	45W	W=100.10mm, H=39.77mm

Order Options

CCT (Colour Temperature)	
3000K	1
4000K	2
5700K	3
TUNABLE 2700K-6700K 	4

CRI	
>90	1

Beam Angle

110°

Control	
ON-OFF	 1
ON-OFF (FLICKER FREE)	 2
DALI-2 DT6	 3
DALI-2 DT8	 4
DALI+	 5

Mounting

RECESSED

Material Colour

Black		1
White		2
Grey		3

Accessories

Product Order Code	Accessories Name	Accessories Image
10113-  1	LED PCB	
10113-2	Suspension Wire	
10113-3	PMMA Diffuser	
10113-4	Micro Prismatic Diffuser	
10113-5	Profile Connector	
10113-6	Profile Endcap	

Order Options

CCT (Colour Temperature) 

3000K

4000K

5700K

Tunable White 2700K-6500K

1

2

3

4



CRI 

>90

1

Material Colour 

Black

White

Grey







1

2

3