

FIONX SLIM T60



Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM<3

L70 @50,000h

Micro Prismatic Diffuser




Aluminium

Types

Recessed with Frame in GYPSUM Ceiling

Recessed in T-Bar Techzone Ceiling

Single Line Diagram

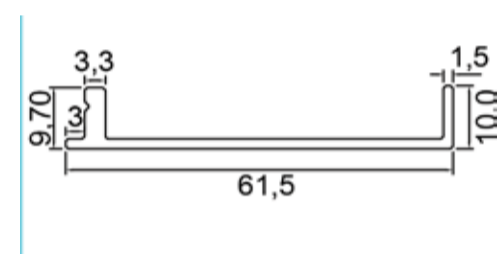

FINOX SLIM T60

This light features has:


- Luminaire housing of extruded aluminium
- Aluminium and powder-coated sheet metal body
- High-performance Prismatic double-diffuser
- Glare-free & uniform light distribution
- Energy-efficient LED with color rendering
- LED PCB mounted on insert design with heat sink
- Bottom opening for easy maintenance
- Pendant with cable suspension

Color



Light Distribution

Direct



CRI ≥ 90



TUNABLE
WHITE

FIONX SLIM T60



FIONA SLIM T60

Product Order Code	System Power	Dimension
10116-1	30W	W=145mm, H=27mm
10116-2	45W	W=145mm, H=27mm

Order Options

CCT (Colour Temperature)	
3000K	1
4000K	2
5700K	3
TUNABLE 2700K-6700K	4

CRI	
>90	1

Beam Angle

110°

Control		
ON-OFF		1
ON-OFF (FLICKER FREE)		2
DALI-2 DT6		3
DALI-2 DT8		4
DALI+		5







Mounting

RECESSED

Material Colour


Black		1
White		2
Grey		3

Accessories

Product Order Code	Accessories Name	Accessories Image
10113- <input checked="" type="radio"/> <input type="radio"/> <input type="radio"/> <input type="checkbox"/> 1	LED PCB	
10113-2	Suspension Wire	
10113-3	PMMA Diffuser	
10113-4	Micro Prismatic Diffuser	
10113-5	Profile Connector	
10113-6	Profile Endcap	

Order Options

CCT (Colour Temperature)

- 3000K 1
- 4000K 2
- 5700K 3
- Tunable White 2700K-6500K  4

CRI

- >90 1

Material Colour

- Black 1
- White 2
- Grey 3