


# FIONX SLIM T60

Direct | Recessed

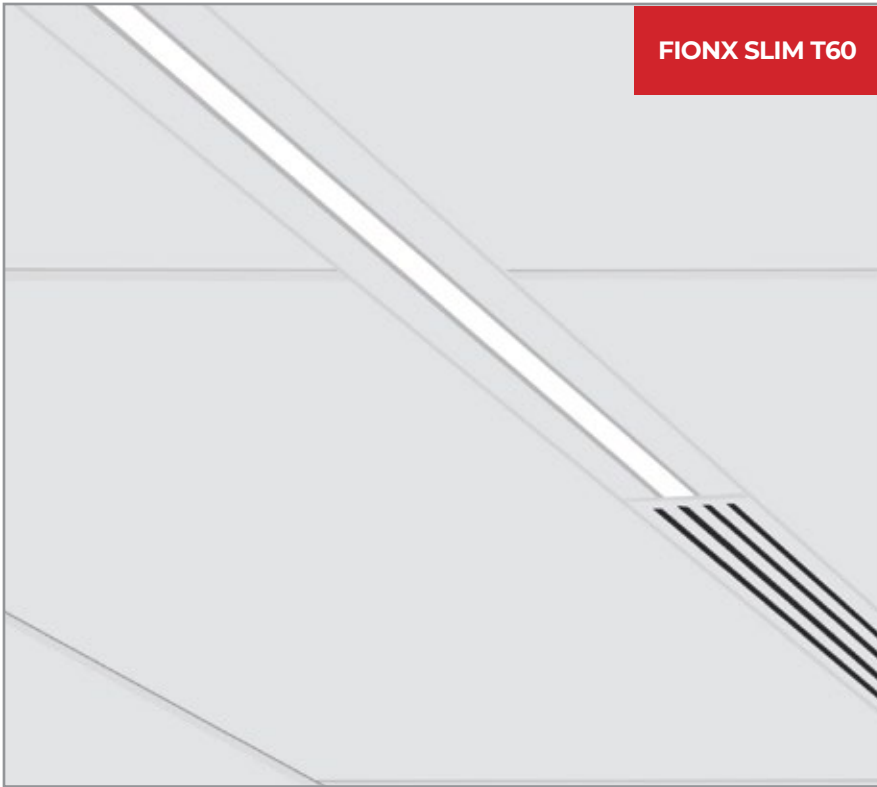

FIONX SLIM T60

**FIONX SLIM T60** Luminaire with Extruded aluminium housing and with premium powder coating finish.

Powered by high quality LED's with a binning tolerance of  $\leq 3$  SDCM and CRI  $\geq 90$ . The luminaire maintains atleast 70% of its luminous flux after 50,000 operating hours, guaranteeing long term reliability. High efficiency Micro Prismatic diffuser provides glare control and uniform illumination.

With a standard size of 1200 mm length, 9.70mm height and 61.50mm width, this fixture is crafted for direct light distribution making it ideal for professional applications.

Customisations in RAL finish, Wattages and Length available as per request to enhance installation and functionality.

## Single Line Diagram

Recessed Mounted  
Profile Code  
SY-04



Recessed with Frame in GYPSUM Ceiling

Recessed in T-Bar Techzone Ceiling

## FIONX SLIM T60



## Quick Info

### Mounting Type

Recessed

### Material Colour

Customize RAL available

### Protection mode

IP40

### Driver Details

ON/OFF/, DALI-2 DT6 / DALI-2 DT8/ DALI +

Power Factor (PF) -0.95

THD- <10%

UGR - <19

### LED

CCT- 3000K/ 4000K/ 5700K/ TUNABLE WHITE 2700K-6700K

CRI-  $\geq 90$

Life Span - L70@50000h

MacAdam -  $\leq 3$  SDCM

### Beam Angle

120°

### Optics

Micro Prismatic Diffuser

### Efficacy

3000K- 91.6

4000K- 118.9

5700K- 127.1

Tunable White 2700K-6700K- 118.9

### Electrical

Wattage - 30W/4ft

Opt Wattages Available -35W/4ft, 40W/4ft, 45W/4ft

Input Voltage- 220-240 VAC

### Physical

Length- 1200mm

Height- 9.70mm

Width- 61.5mm