

FIONX T100



Quick Info

CRI ≥90

3000K/ 4000K/ 5700K

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM<3

L70 @50,000h

Micro Prismatic Diffuser





Aluminium

Types

Recessed with Frame in GYPSUM Ceiling

Recessed in T-Bar Techzone Ceiling

Single Line Diagram

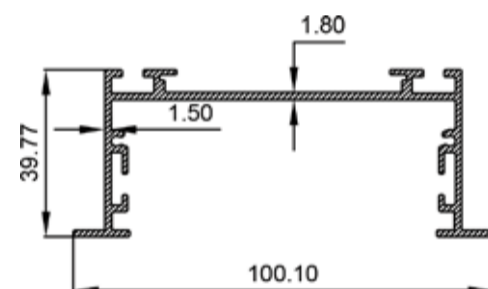

FIONX T100

This light features has:


- Luminaire housing of extruded aluminium
- Aluminium and powder-coated sheet metal body
- High-performance Prismatic double-diffuser
- Glare-free & uniform light distribution
- Energy-efficient LED with color rendering
- LED PCB mounted on insert design with heat sink
- Bottom opening for easy maintenance
- Pendant with cable suspension

Color



Light Distribution

Direct



CRI ≥ 90



TUNABLE
WHITE

FIONX T100



FIONX T100

Product Order Code	System Power	Dimension
10118-1	30W	W=145mm, H=27mm
10118-2	45W	W=145mm, H=27mm

Order Options

CCT (Colour Temperature)	
3000K	<input type="radio"/> 1
4000K	<input type="radio"/> 2
5700K	<input type="radio"/> 3
TUNABLE 2700K-6700K	<input checked="" type="radio"/> 4

CRI	
>90	<input checked="" type="radio"/> 1

Beam Angle

110°

Control	
ON-OFF	1
ON-OFF (FLICKER FREE)	2
DALI-2 DT6	3
DALI-2 DT8	4
DALI+	5







Mounting

RECESSED

Material Colour


Black	<input checked="" type="radio"/>	1
White	<input type="radio"/>	2
Grey	<input type="radio"/>	3

Accessories

Product Order Code	Accessories Name	Accessories Image
10113- <input checked="" type="radio"/> <input type="radio"/> <input type="radio"/> <input type="radio"/> 1	LED PCB	
10113-2	Suspension Wire	
10113-3	PMMA Diffuser	
10113-4	Micro Prismatic Diffuser	
10113-5	Profile Connector	
10113-6	Profile Endcap	

Order Options

CCT (Colour Temperature)

- 3000K 1
- 4000K 2
- 5700K 3
- Tunable White 2700K-6500K  4

CRI

- >90 1

Material Colour

- Black 1
- White 2
- Grey 3