

FIRE FOX RING

divinity lights





FIRE FOX RING

Fire Fox Ring fixture has :

- Concentric circles molded in acrylic
- Aluminium + Acrylic luminaire housing
- Premium Finish Powder coating
- High performance Acrylic
- Uniform illumination
- Concentric circles moulded in acrylic
- Energy efficient LED with high colour rendering
- LED PCB mounted
- Pendant using suspension cable with M6 bolt and fastener
- Bottom opening for easy maintenance

Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

Tunable white (2700K-6500K)

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM <3

Acrylic Diffuser




L70 @50,000h

Aluminium

Types

Pendant/ Surface

Single Line Diagram

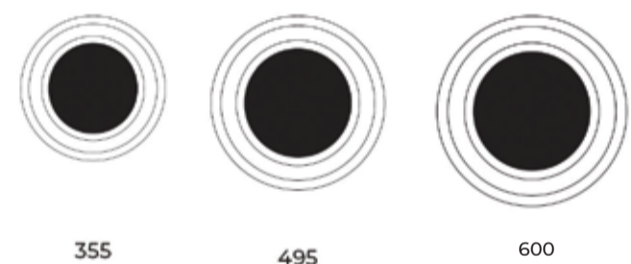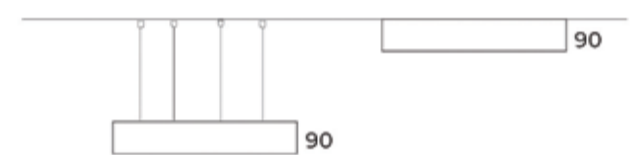

CRI ≥ 90



TUNABLE
WHITE

FIRE FOX RING



FIRE FOX RING

System Power	Dimensions
25W	Dia= 355mm, H= 90mm
40W	Dia= 495mm, H= 90mm
50W	Dia= 600mm, H= 90mm

Order Options

Distribution

Direct

CCT (Color Temperature)

3000K
4000K
5700K
Tunable 2700K-6500K



CRI

>90

Beam Angle

Diffused

Control

- ON-OFF
- ON-OFF (FLICKER FREE)
- DALI-2 DT6
- DALI-2 DT8
- DALI +



Mounting Type

- Pendent
- Surface

Material Color

RAL As Per Request

Photometric Detail

LUMINOUS INTENSITY DISTRIBUTION

