

FLEX Side BEND 1220
LED STRIP

divinity lights



Quick Info

CRI ≥ 90

2700K, 3000K, 4000K, RGB, RGBW

Beam Angle 180

Silicon finish

PCB Width 12mm

IP Rating IP67

Non-Dimmable/ Dali-Dimmable

SDCM<3



L70 @50,000h



Type

Surface

Single Line Diagram

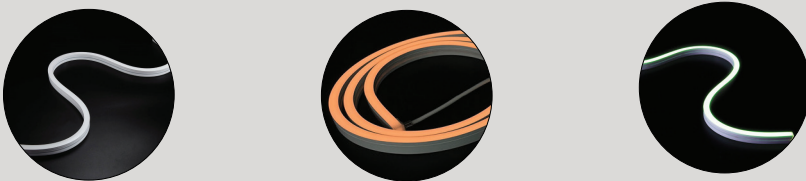

FLEX SIDE BEND 1220

Flex Side Bend 1220 fixture has :

- Very flexible top-bend in ultra-thin appearance.
- Onsite simple cutting and assembly operation, easy mounting way by adhesive tape.
- Dot-free linear and homogeneous lighting performance.
- Quite a short increment with high density LED array.
- More flexible customization.
- More perfect of brightness and color consistency for the entire run length.
- Much wider luminous surface, no dark area at the edge.
- Higher production efficiency and quality yield by adopting silicone extrusion processing technology.

FLEX SIDE BEND 1220



Product order code	System Power	Dimensions
2810	10W/MTR	12 MM X 20 MM

Order Options

CCT (Color Temperature)

- 2700K
- 3000K
- 4000K
- RGB
- RGBW

CRI

>90

Beam Angle

1800

Control

- Non-Dimmable
- Dali- Dimmable
- RGB DMX512



Mounting Type

Surface