


FLEXIBLE 10*5
ENCAPSULATED

divinity lights



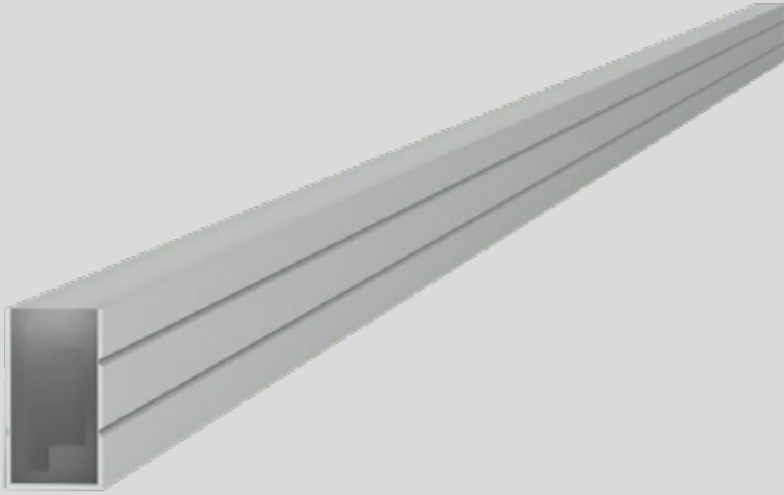

Quick Info

CRI $\geq$ 80

2700K, 3000K, 4000K, RGB, RGBW

Silicon finish

Encapsulated Diffuser

IP Rating IP67

Non-Dimmable/ Dali-Dimmable

DMX Controller





SDCM<3

L70 @50,000h

Type

Surface


Single Line Diagram




FLEXIBLE10*5

Flex 10*5 Encapsulated Fixture has :

- Easily bends around curves and contours for creative lighting applications.
- Fully Encapsulated provides enhanced protection against dust, moisture, and environmental conditions.
- Delivers uniform, dot-free illumination with smooth light distribution.
- Lightweight and simple to install in various cove and architectural profiles.
- Can be cut and configured to suit different project requirements
- Excellent brightness with reliable and consistent illumination.
- Ideal for cove lighting, ceilings, walls, furniture, niches, and architectural accents.
- Available in different colour temperatures to create the desired ambience.
- Encapsulated construction helps protect the LEDs and reduce maintenance requirements.



FLEXIBLE 10*5 ENCAPSULATED



System Power	Dimensions
5W/mtr	10 MM X 5 MM
10W/mtr	10 MM X 5 MM
15W/mtr	10 MM X 5 MM

Order Options

CCT (Color Temperature)

- 2700K
- 3000K
- 4000K
- RGB
- RGBW

CRI

- >80

Beam Angle

- 120°

Control

- Non-Dimmable
- Dali- Dimmable
- DMX Controller



Mounting Type

- Surface Mounted

Input Voltage

- 24V DC