

In.Licht Ultra

FLEXION 150 4000K TM 30 REPORT


Lighting Facts

Color Quality:


CCT	4082.2
Ra	90.5
Rf	87.6
Rg	97.0
Duv	5.0E-4
SDCM	1.60

HCL index:


Illuminance	548.9
EML	409.13
M-EDI	370.94
S/P ratio	1.8
CAF	0.61
RG Risk	RG1
CS	0.43
SVM	0.0
Percent Flicker	0.0
Flicker Index	0.0
Frequency	0.0

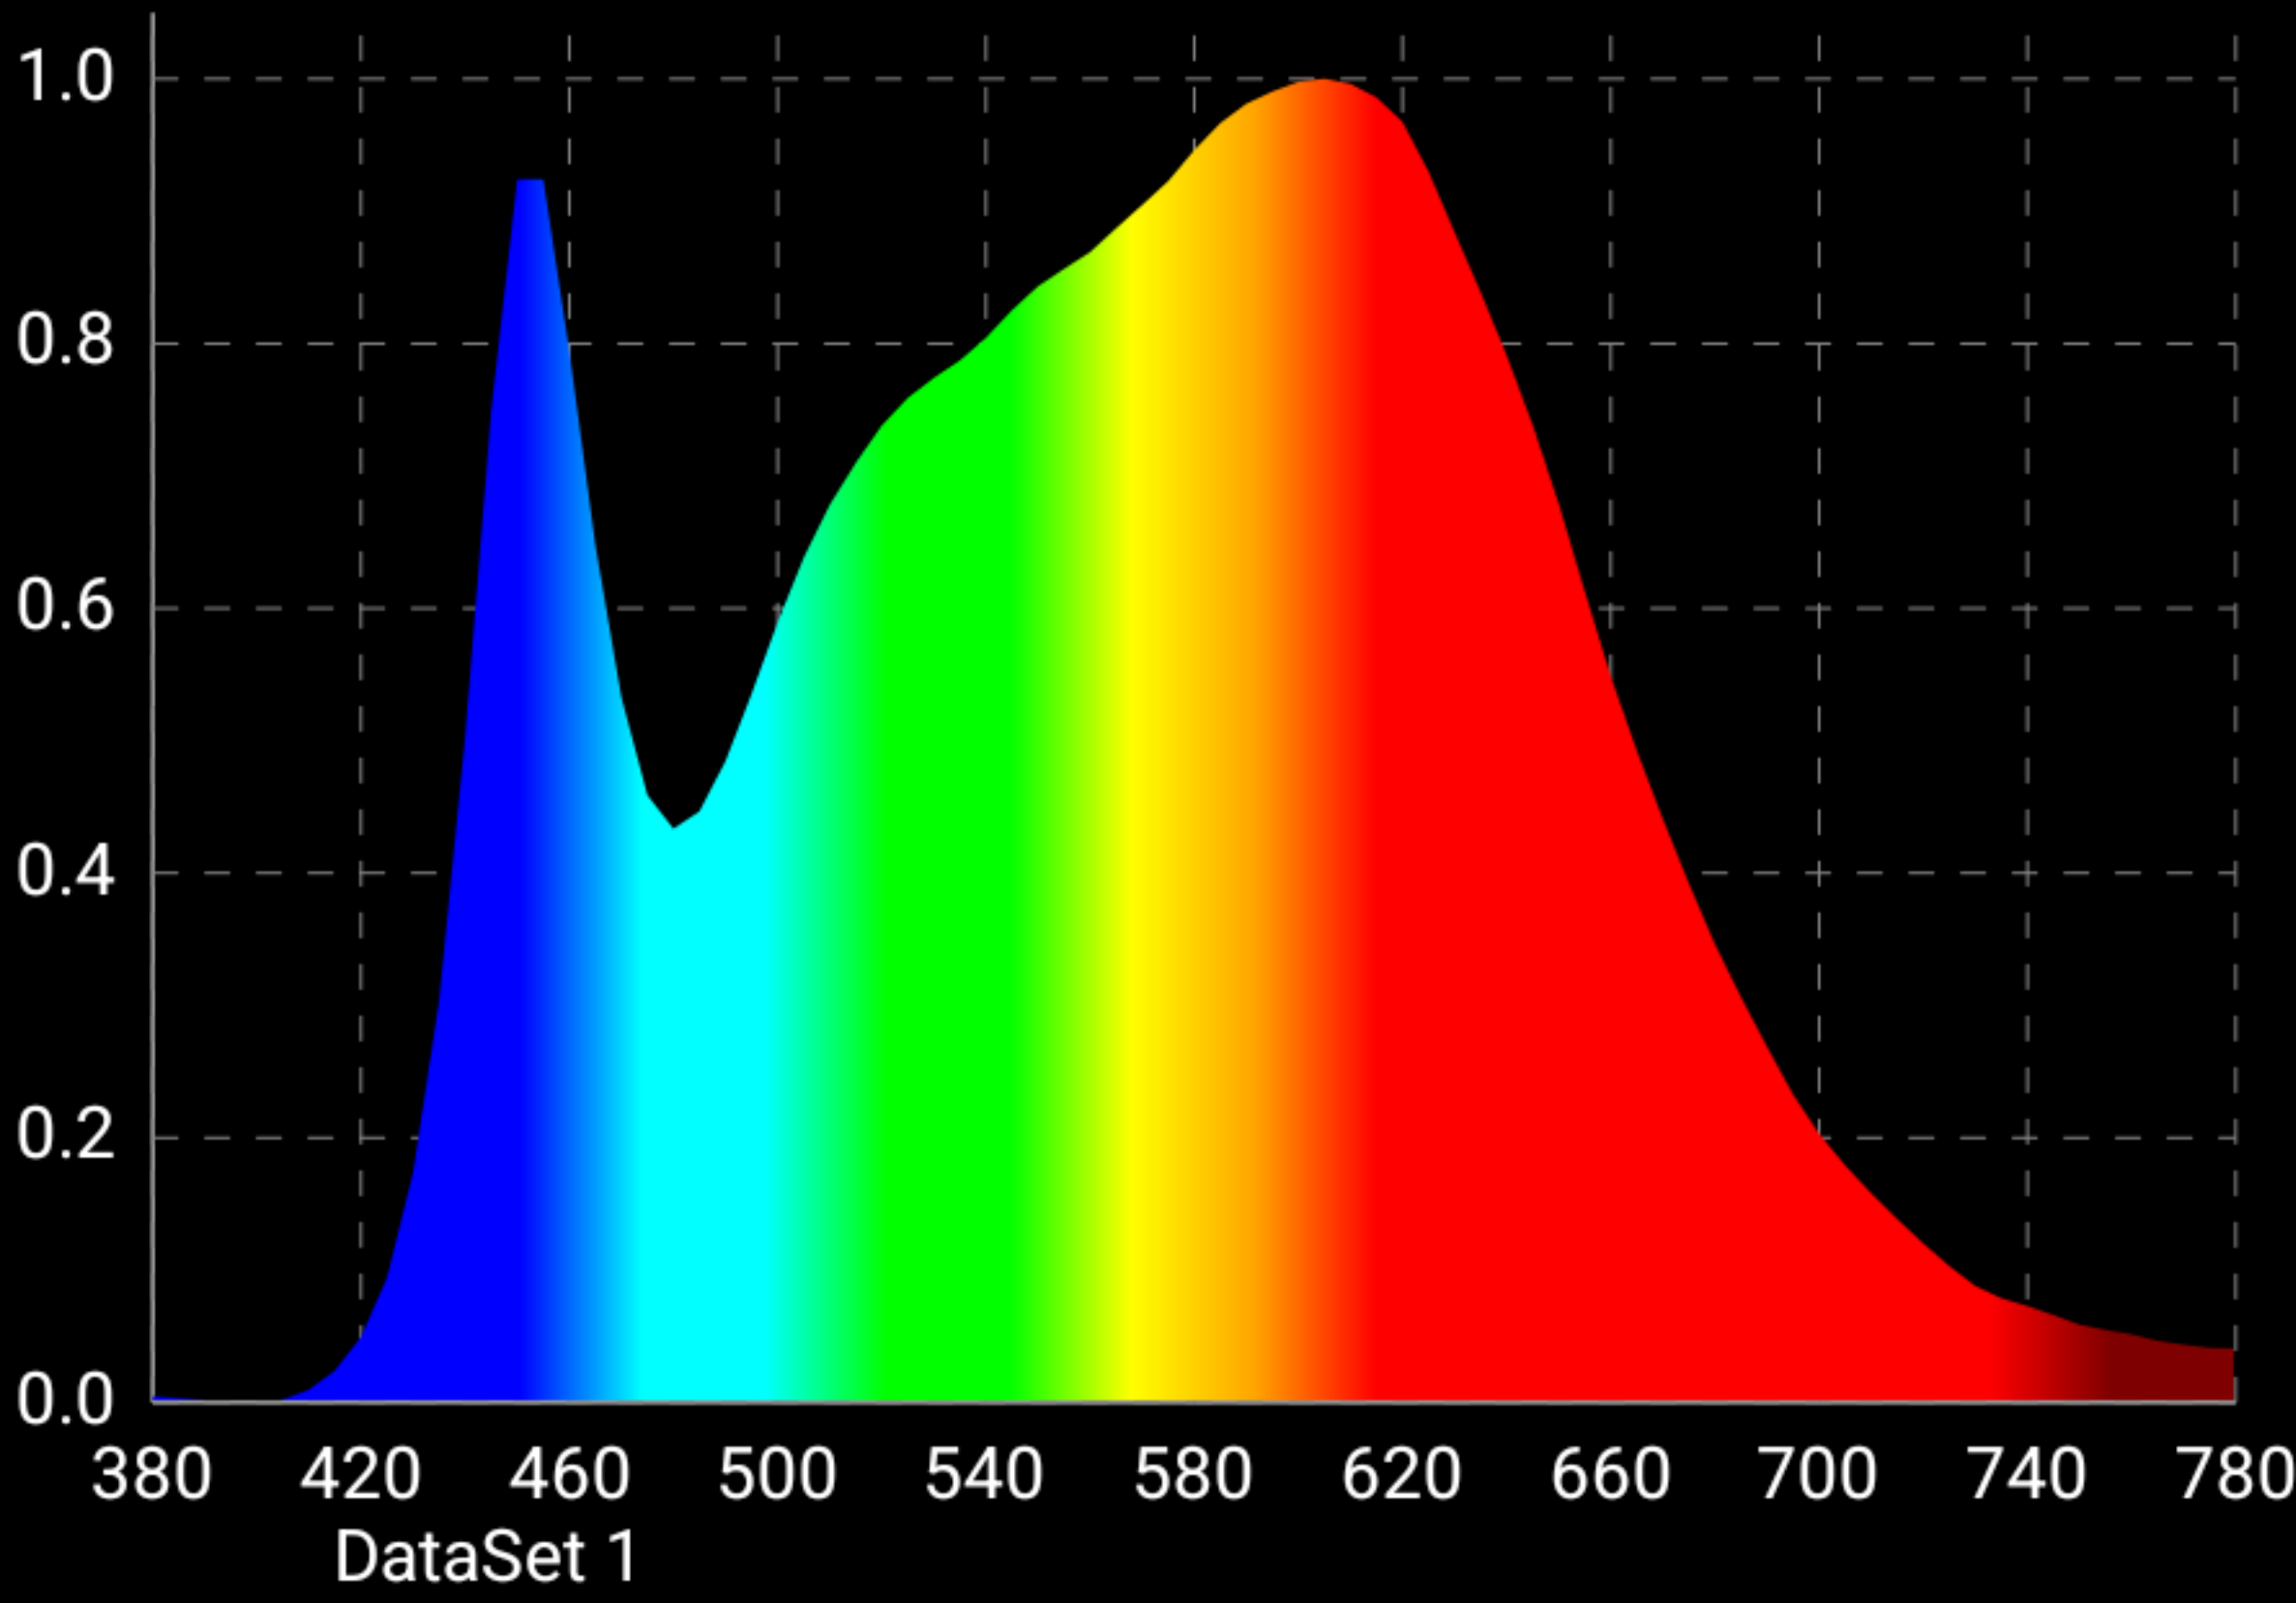

λ_d	569
λ_p	605
λ_{pV}	8.96

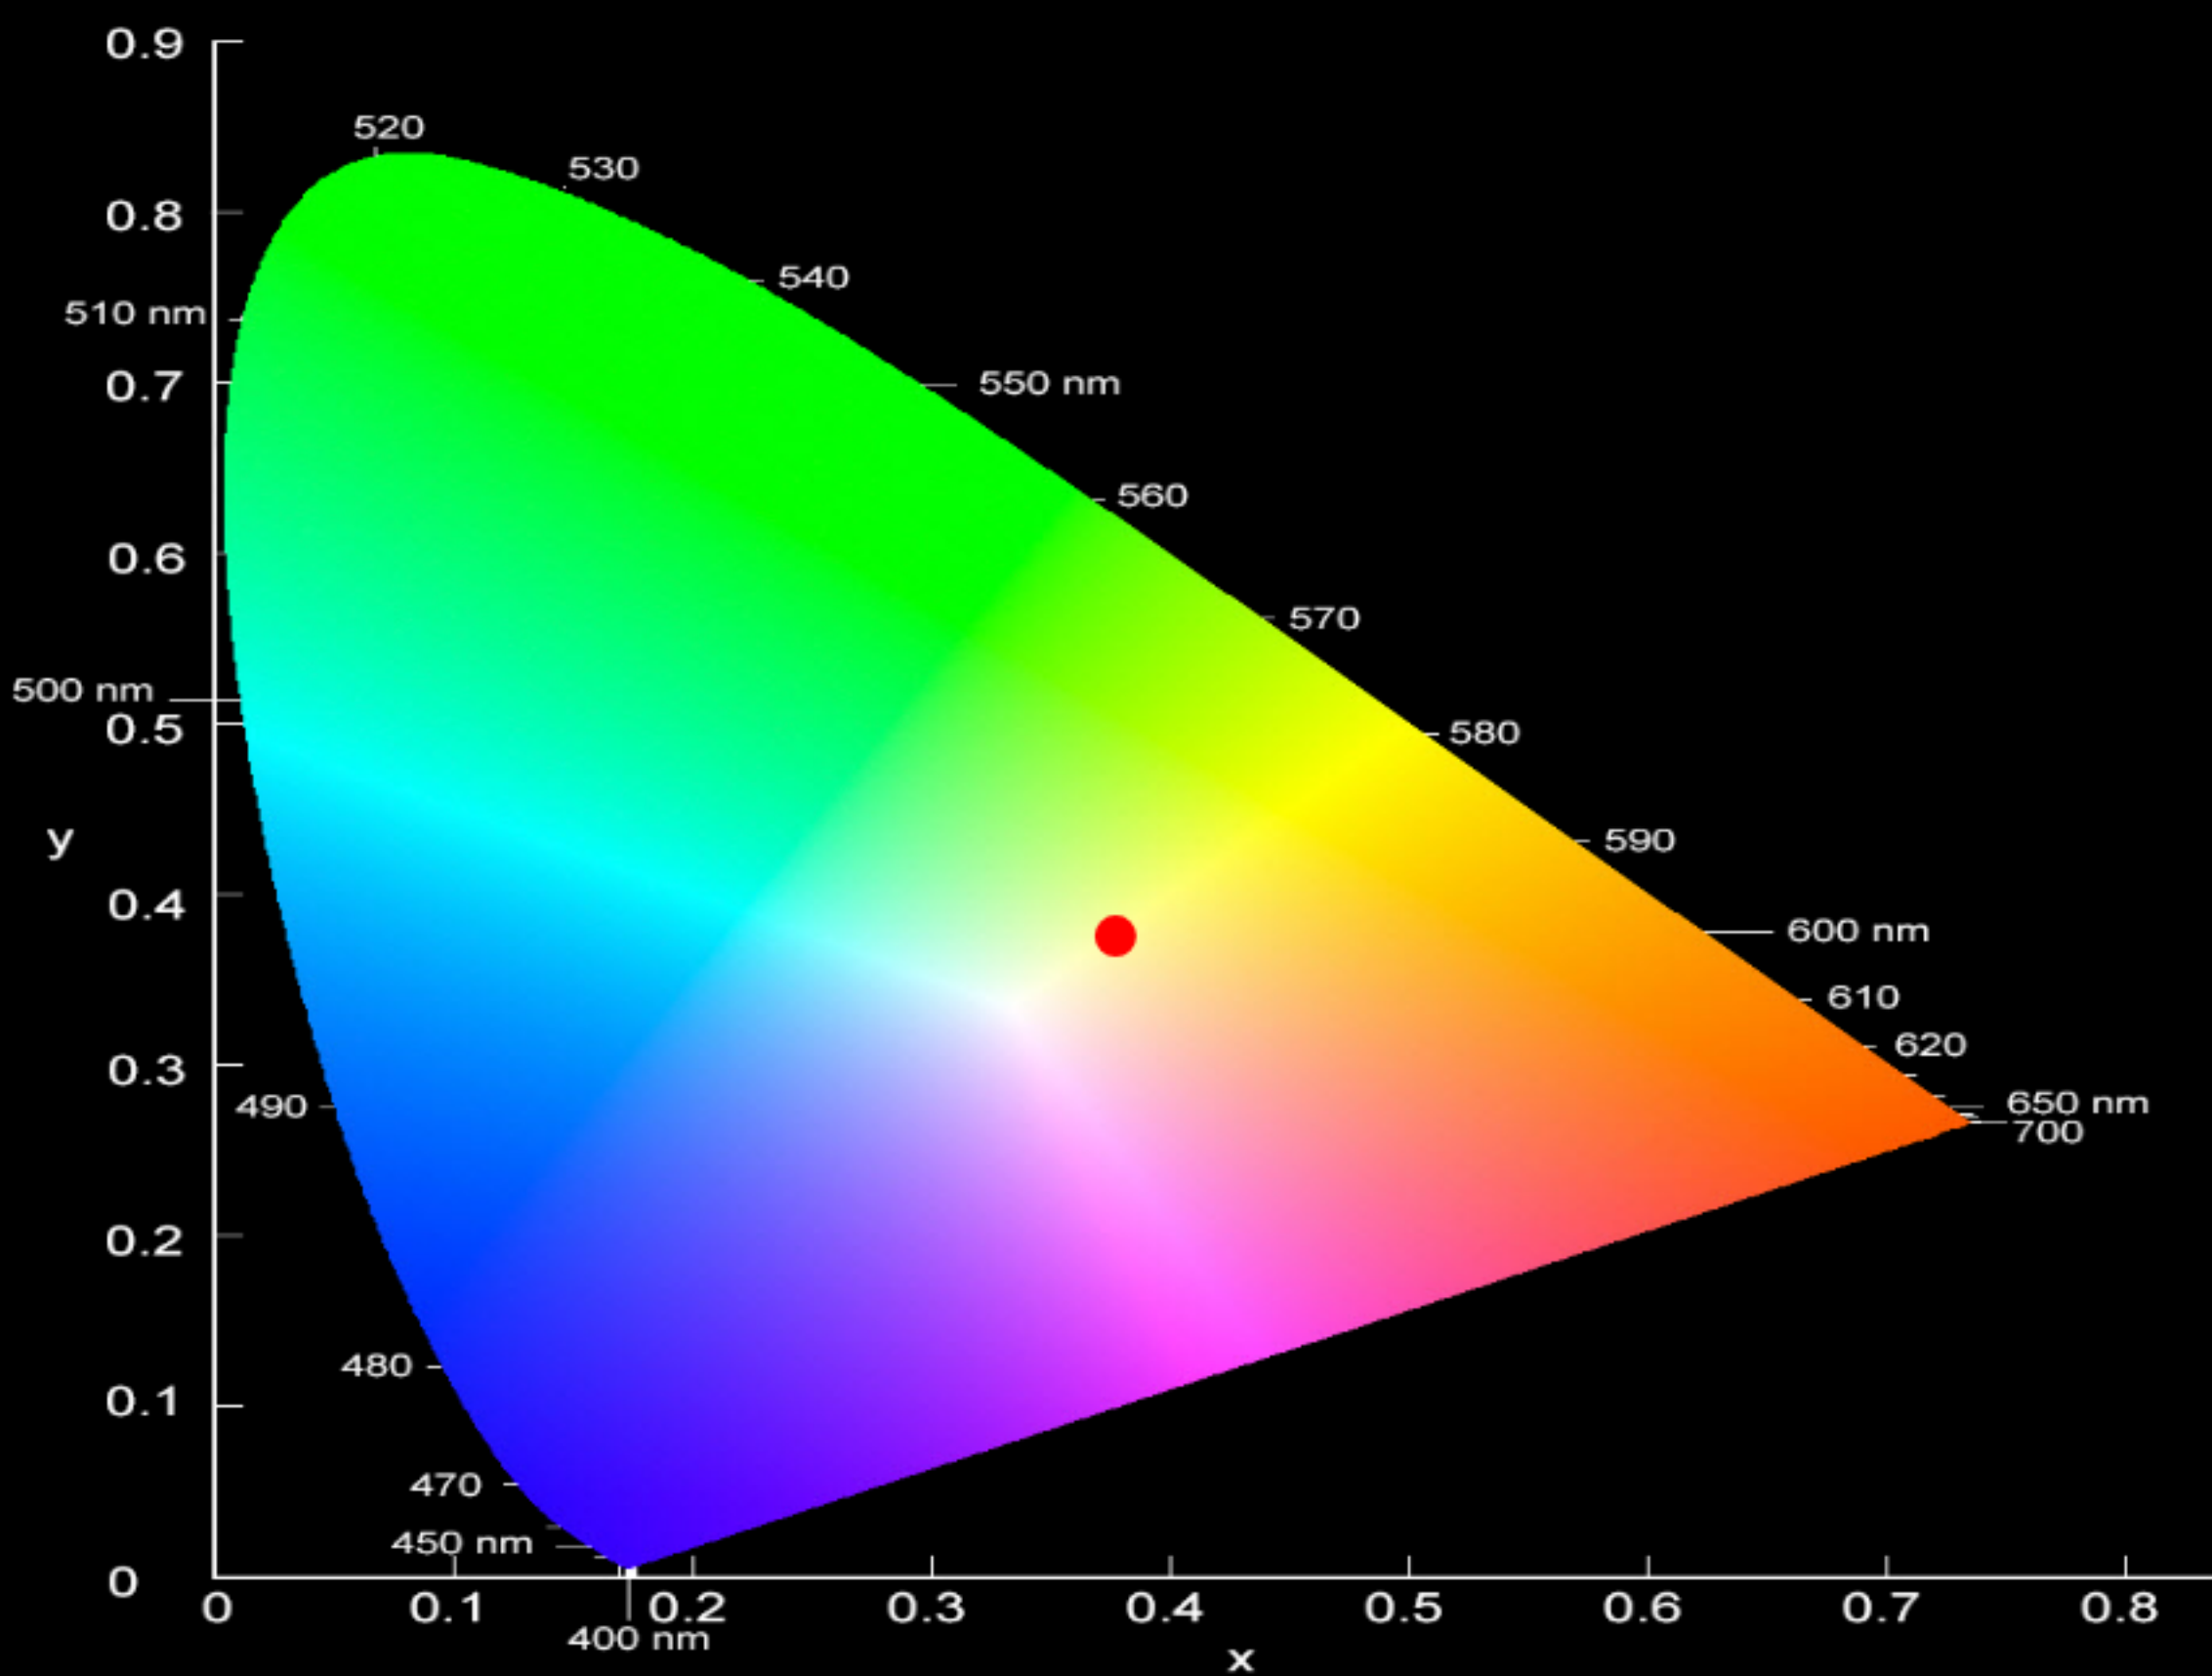


(x,y)	(0.377,0.376)
CCT	4082.2
Duv	5.0E-4

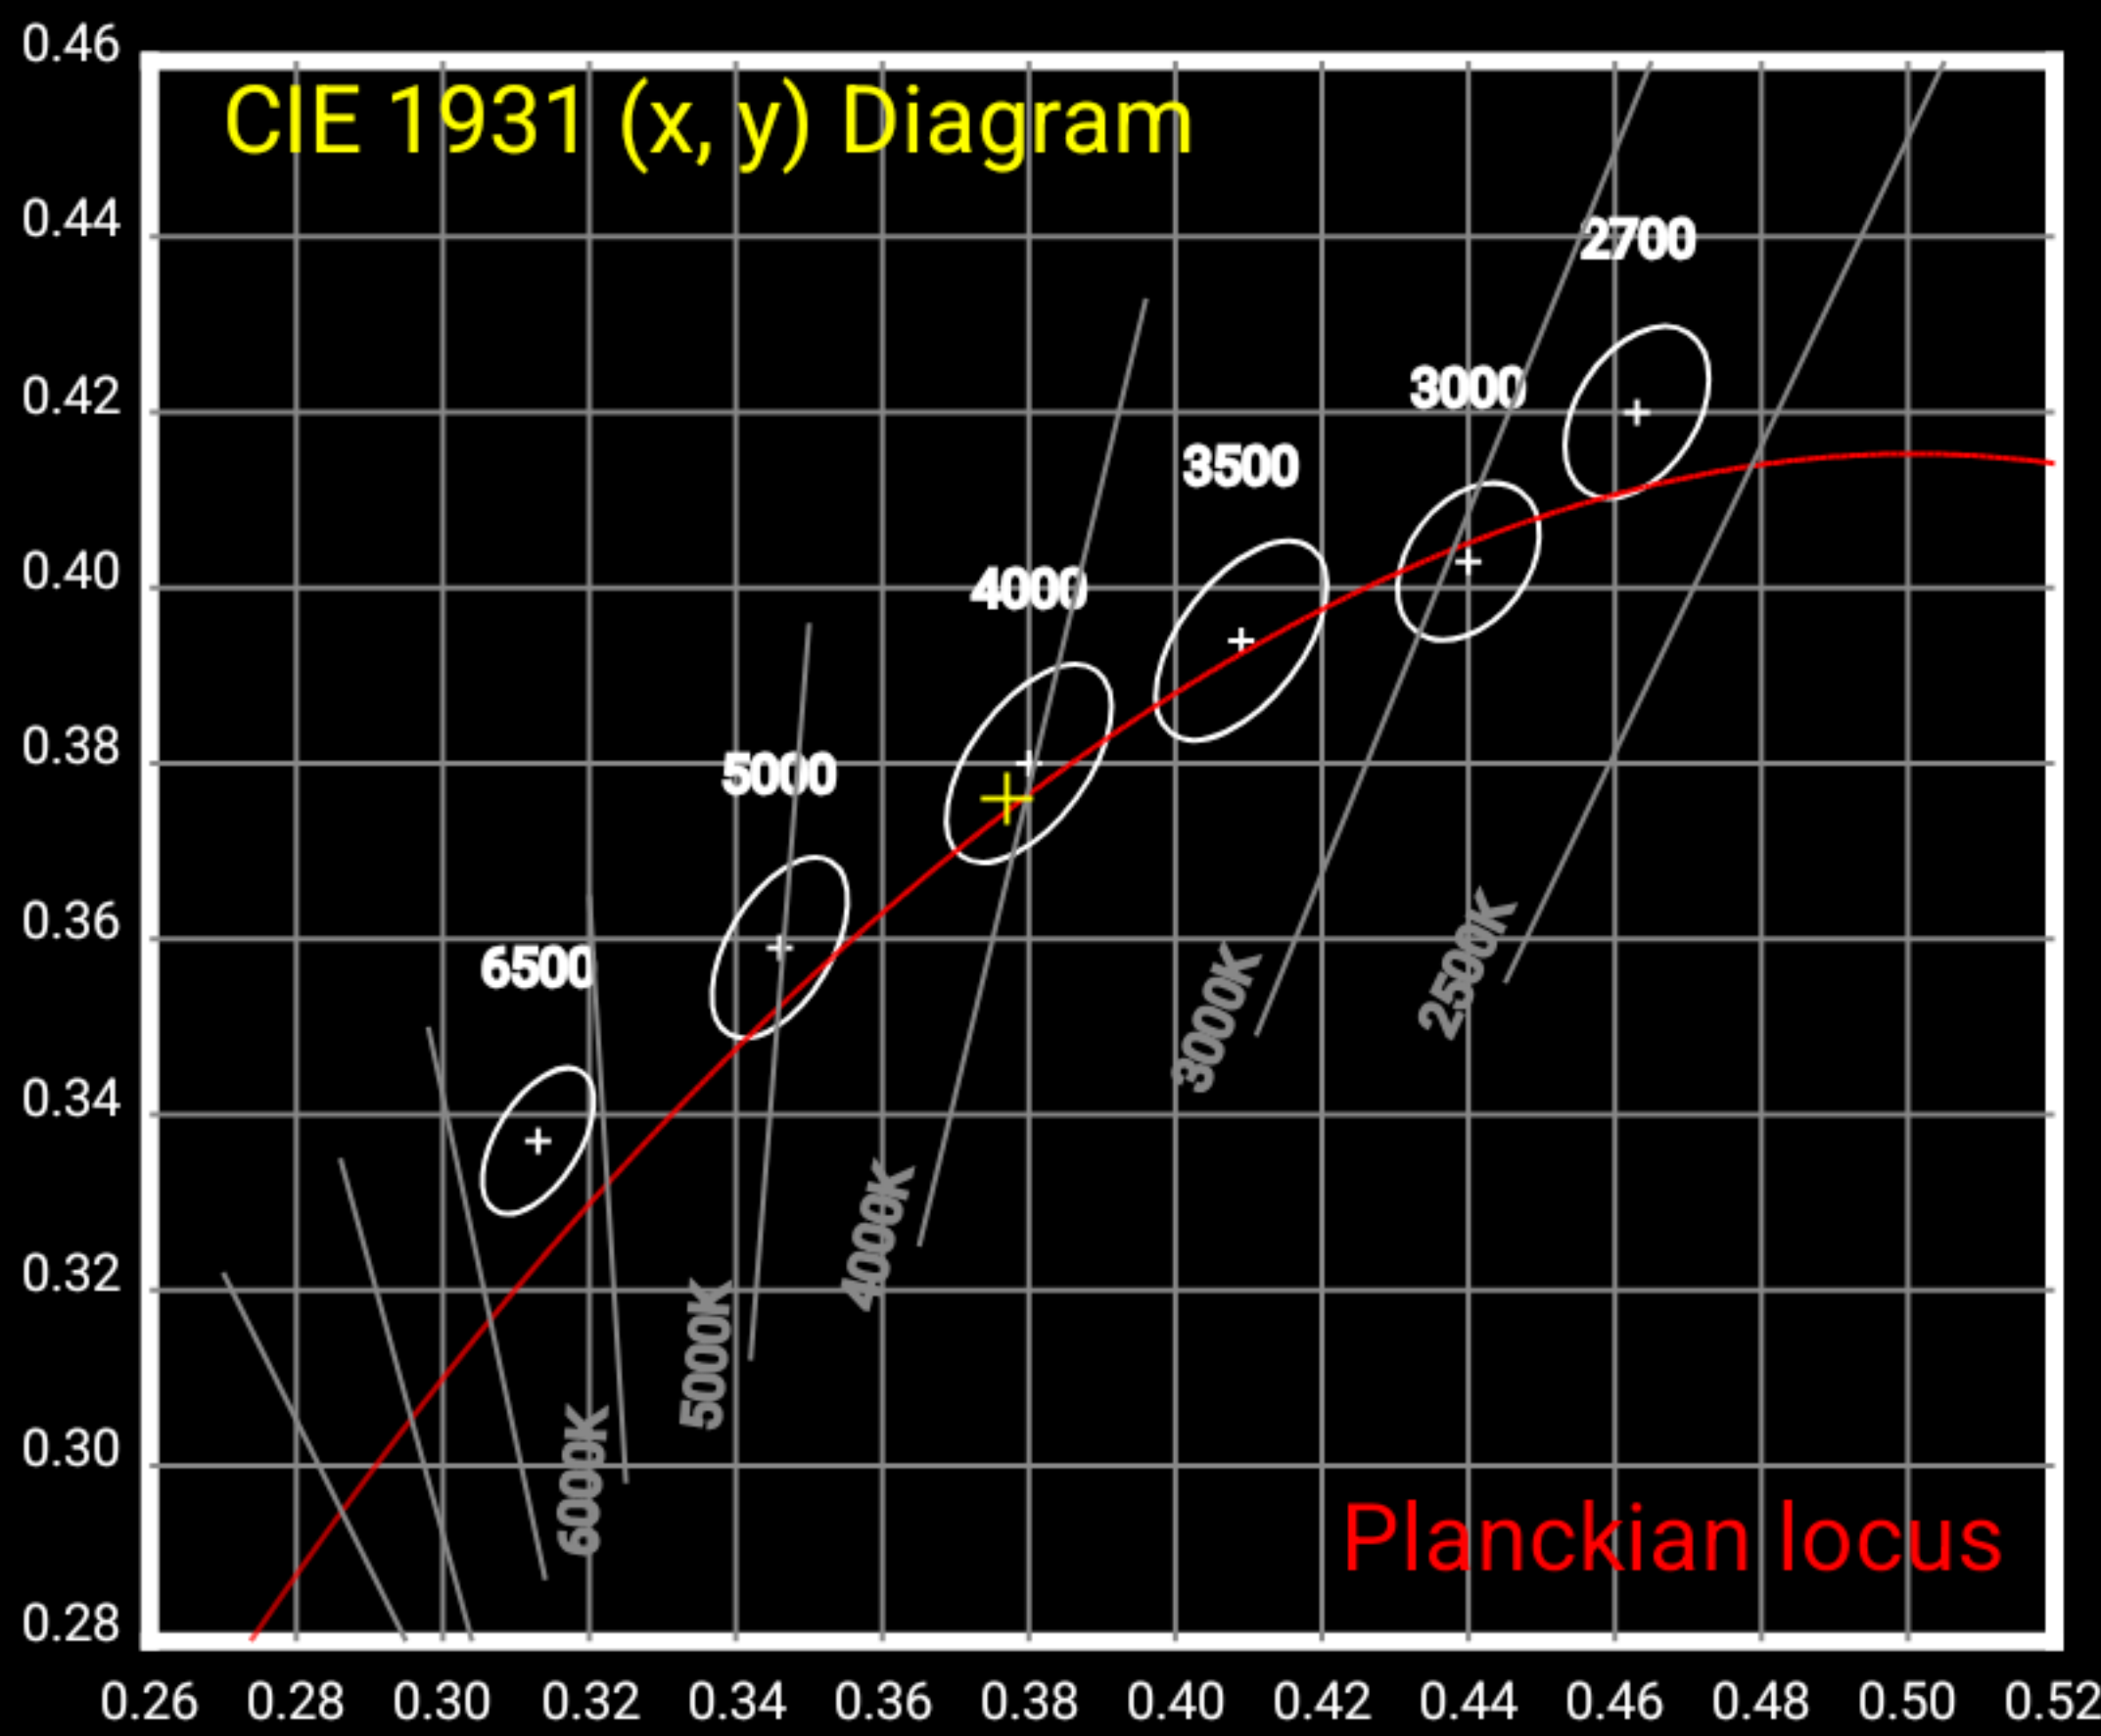


1.60
SDCM

x 0.377
y 0.376

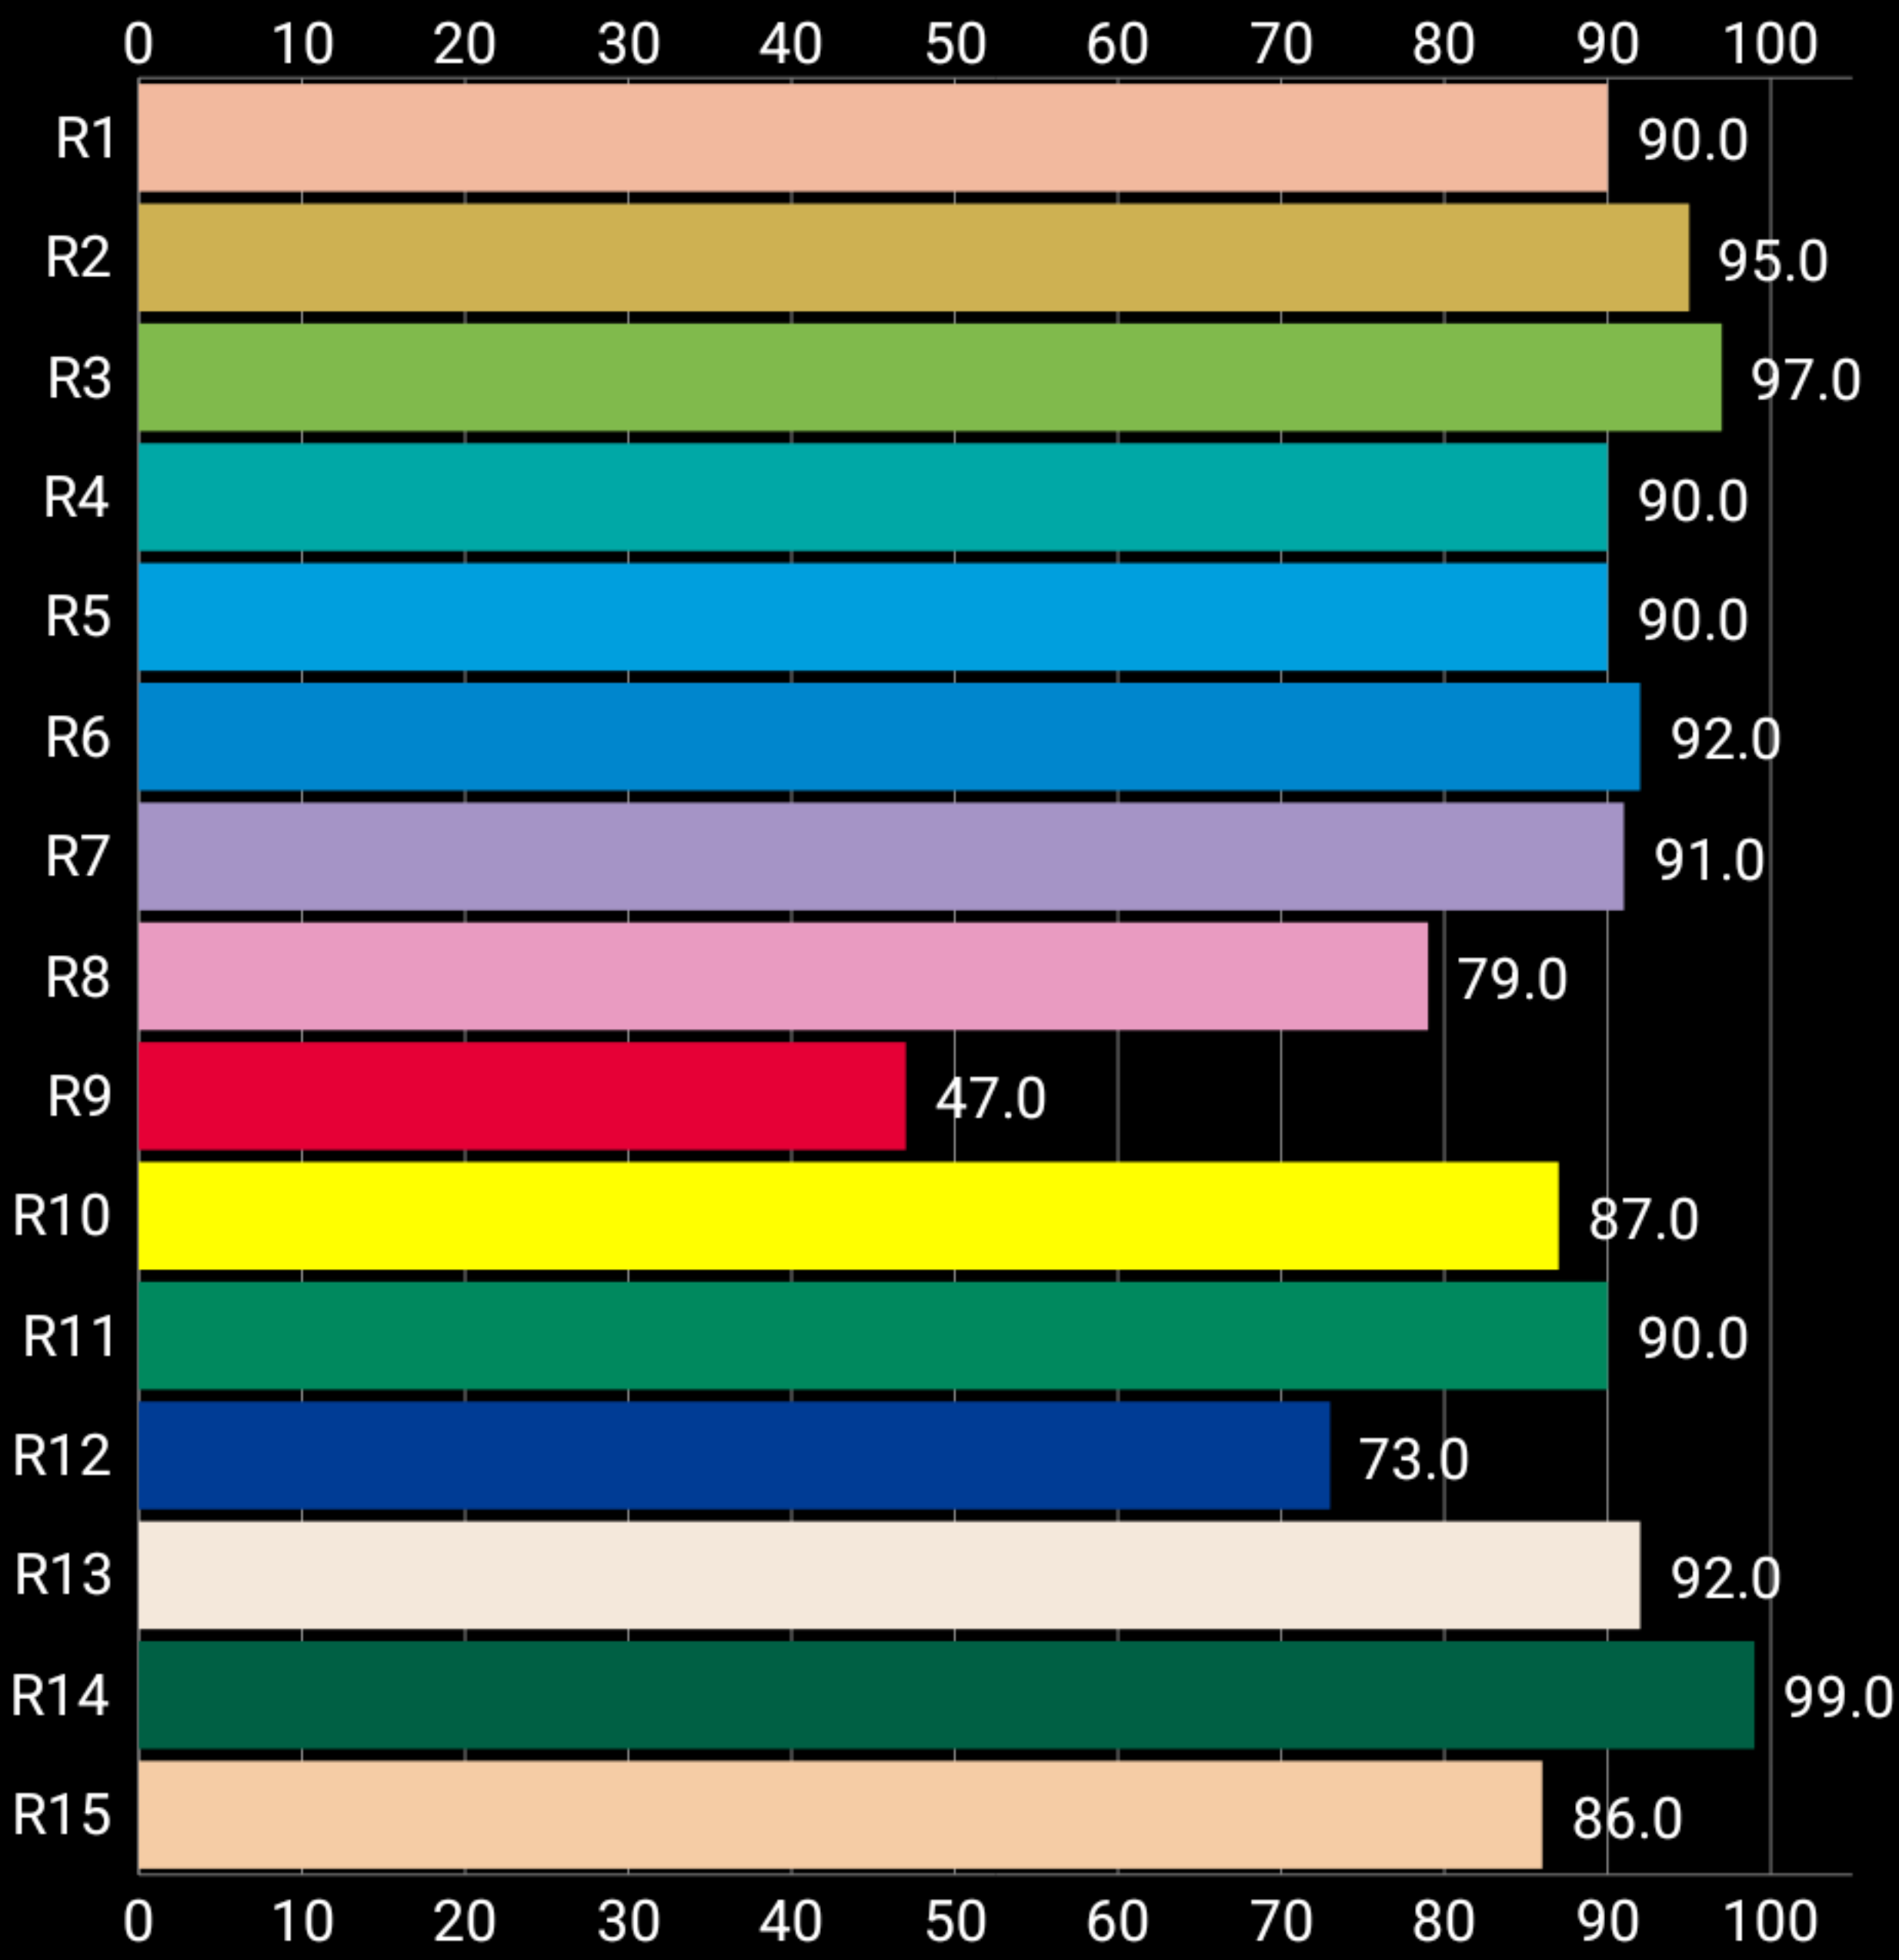

90.5
Ra


86.5
Re

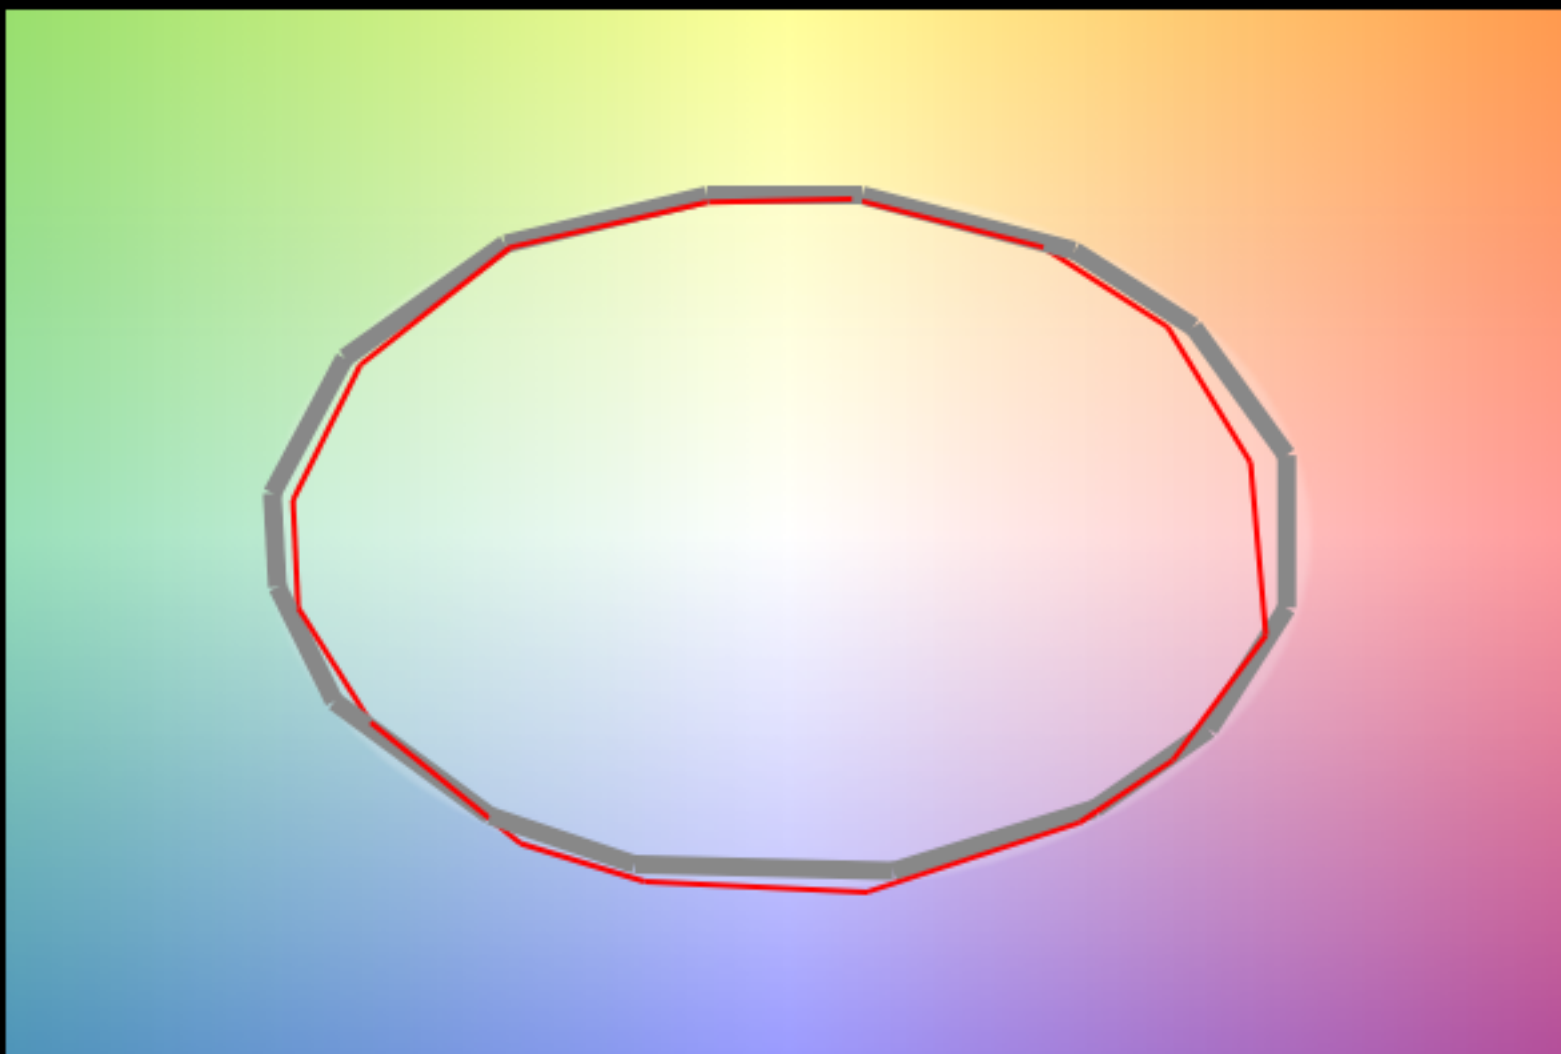


87.6
Rf

97.0
Rg

Time chart

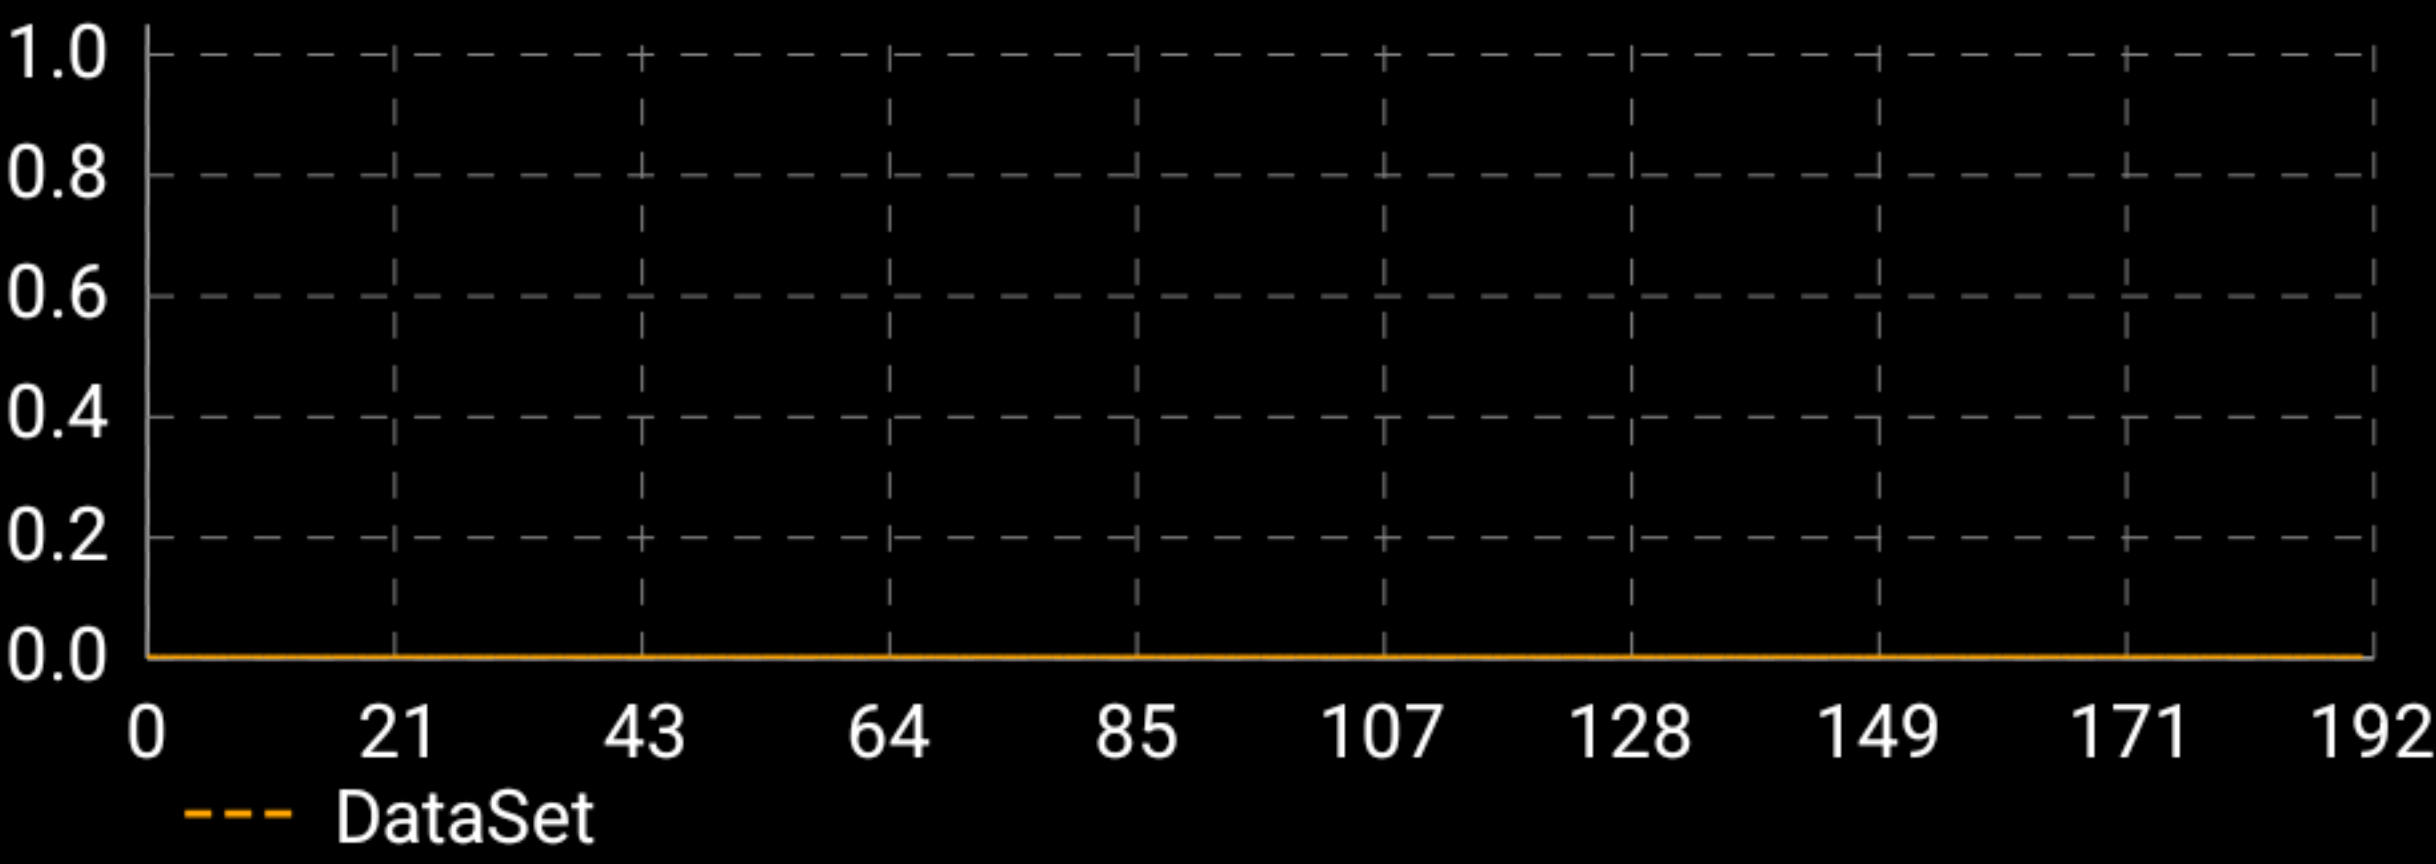

Freq. chart

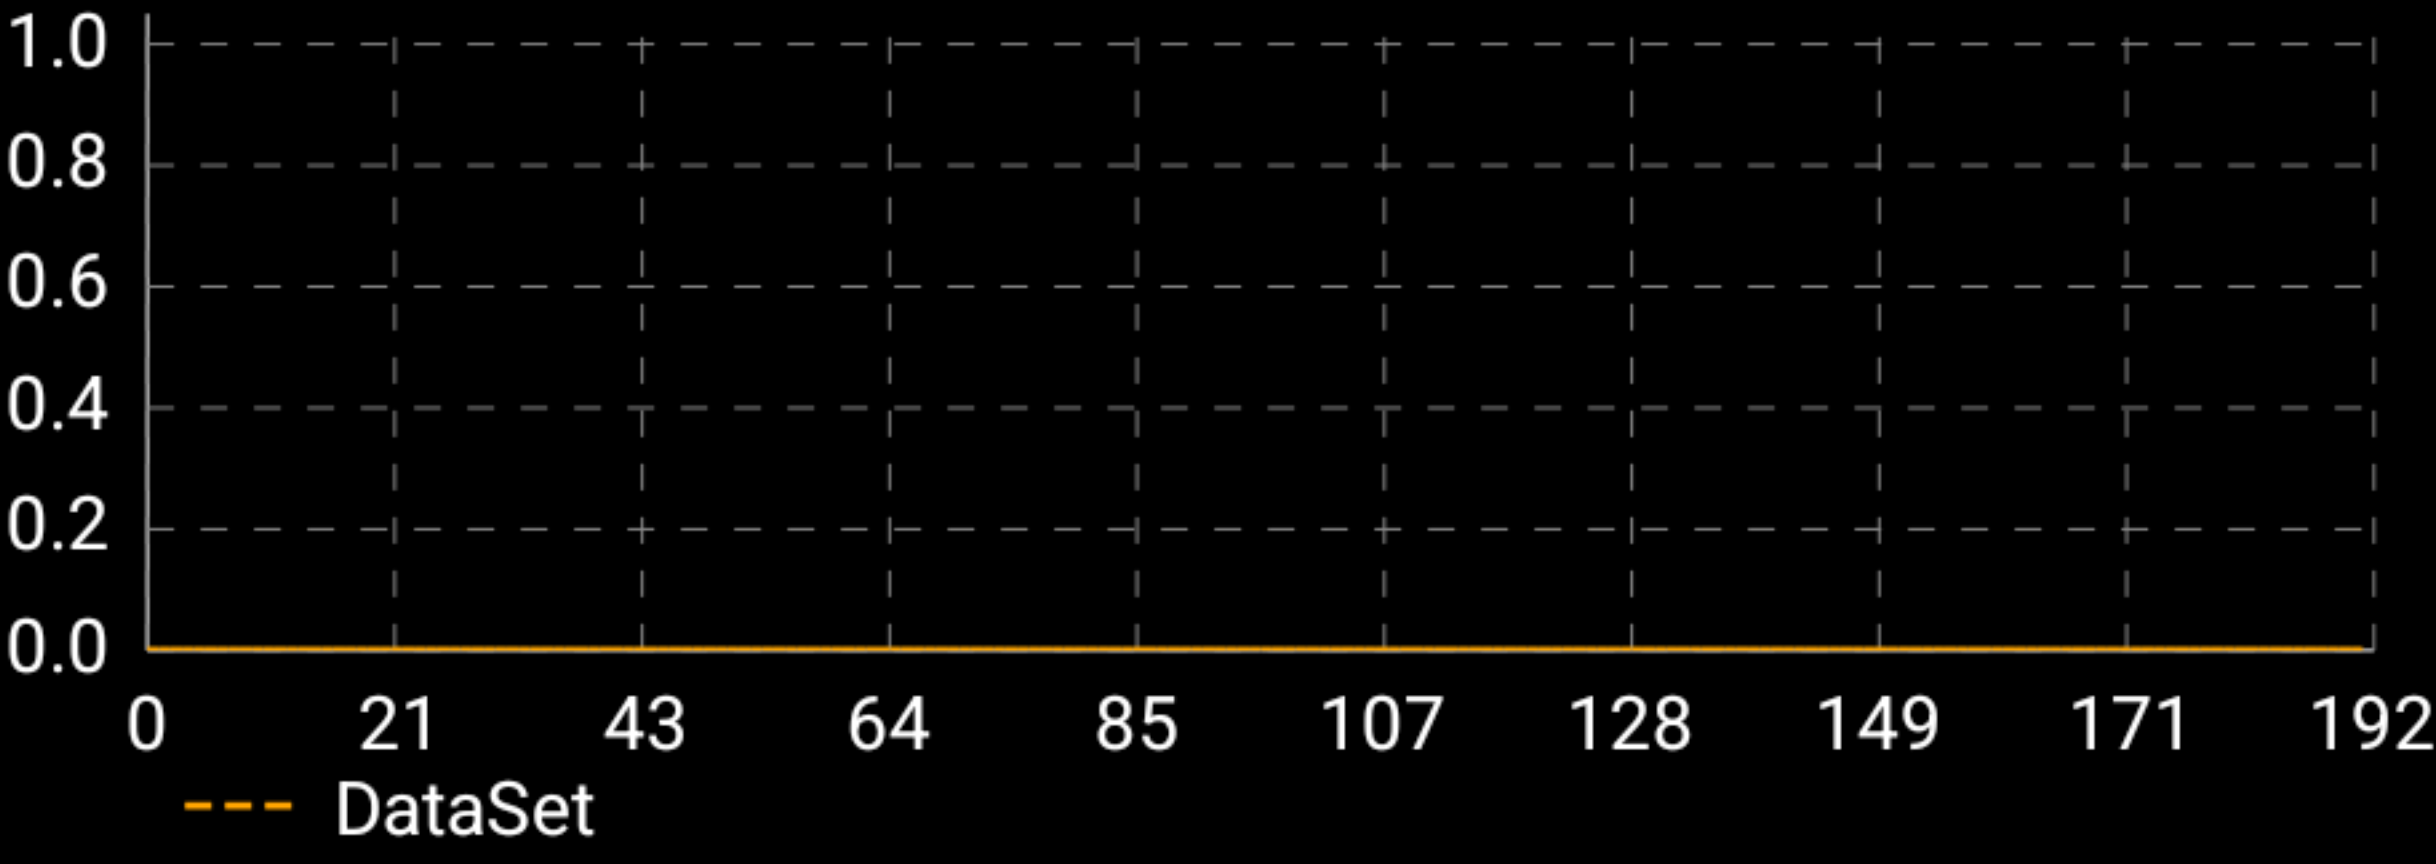

SVM	0.0
Percent flicker	0.0
Flicker index	0.0
Frequency	0.0