


FLIP OUT WALL LIGHT


Direct | Wall-Surface

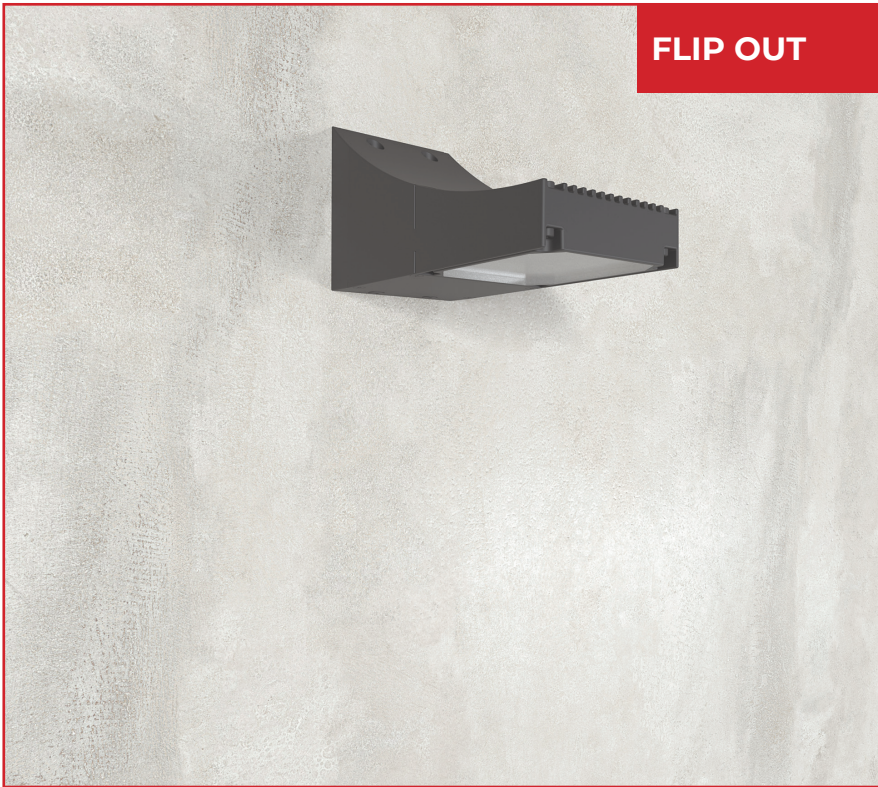

FLIP OUT FLIP IN is a surface-mounted wall light designed with a refined form and durable construction, featuring a premium finish with custom RAL colour options and IP65 protection for reliable performance. Powered by high-quality LEDs with CCT options of 3000K, 3500K and 4000K, it delivers CRI ≥ 80 , L70 $\geq 50,000$ hours and MacAdam ≤ 3 SDCM for consistent, high-quality illumination. With forward-throw optics, lens and glass construction, UGR < 19 , power factor > 0.95 and THD $< 10\%$, FLIP OUT provides efficient and comfortable lighting. It operates at 10W with an input voltage of 220–240V AC and supports Non-Dimmable/ Dali-Dimmable control options.

FLIP OUT measures 115mm in length and 225mm in width, with a front height of 35mm and back height of 120mm. Its forward-throw distribution makes it suitable for residential, hospitality, commercial and professional spaces where focused and visually comfortable wall illumination is required. Divinity Lights offers customized lighting solutions according to specific project requirements, with flexible colour and control options for versatile installations.

Single Line Diagram Recessed

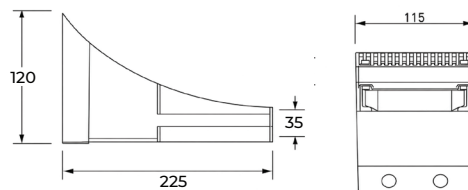

FLIP OUT



Quick Info

Mounting Type

Surface

Material Colour

Customize RAL available

Protection mode

IP65

Driver Details

Non-Dimmable/ Dali-Dimmable

Power Factor (PF) -0.95

THD- $< 10\%$

UGR - < 19

LED

CCT- 3000K, 3500K, 4000K

CRI- ≥ 80

Life Span - L70@50000h

MacAdam - ≤ 3 SDCM

Beam Angle

Forward Throw

Optics

Lens

Glass

Efficacy

80lm/W

Electrical

Wattage - 10W

Input Voltage- 220-240 VAC

Physical

Length- 115mm

Width- 225mm

Front Height- 35mm, Back Height-120mm