

GAZEO SH145 DUO DIFFUSER

Direct | Recessed



GAZEO SH145 DUO DIFFUSER Linear Luminaire in a sleek design with Extruded aluminium

housing and with premium powder coating finish.


Powered by high quality LED's with a binning tolerance of ≤ 3 SDCM and $CRI \geq 90$. The luminaire maintains atleast 70% of its luminous flux after 50,000 operating hours, guaranteeing long term reliability. High efficiency Lens + Micro Prismatic double diffuser provides uniform illumination and reduces glare.

With a customize length, 26.8 mm height and 145 mm width, this fixture is crafted for direct light distribution making it ideal for professional applications.

Customisations in RAL finish, Wattages and Length available as per request to enhance installation and functionality

Single Line Diagram
Recessed Mounted
Profile Code
SDL- 8003

Recessed with Frame in GYPSUM Ceiling
Recessed in Silhouette Techzone Ceiling

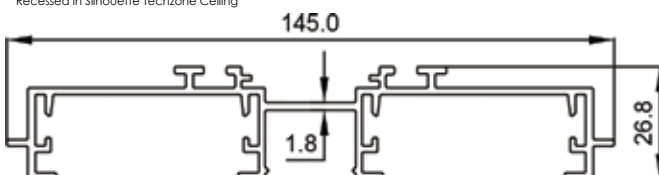

GAZEO SH145 DUO DIFFUSER



Quick Info

Mounting Type

Recessed

Material Colour

Customize RAL available

Protection mode

IP40

Driver Details

ON/OFF/, DALI-2 DT6 / DALI-2 DT8/ DALI +

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED

CCT- 3000K/ 4000K/ 5700K

CRI- ≥ 90

Life Span - L70@50000h

MacAdam - ≤ 3 SDCM

Beam Angle

110°

Optics

Lens

Prismatic diffuser

Efficacy

3000K- 93.5lm

4000K- 109.3

5700K- 129.5

Electrical

Wattage - 30W

Opt Wattage Available- 45W

Input Voltage- 220-240 VAC

Physical Dimensions

Width- 145mm

Height- 26.8mm