

GLOWNEST



Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6, DALI-2 DT8

SDCM<3

Reflector

L70 @50,000h

Types

Recessed

Single Line Diagram




GLOWNEST


Glownest Downlight features has:

- Luminaire housing of die cast aluminium
- Recessed spotlight with effortless installation
- Premium powder coated finish
- SMD (Surface Mount Device) technology
- Technology for maximum efficiency
- Zero multiple shadows
- LED with effective colour rendering
- Overflowing colours with soft light and shadow
- Interpretation of the real environment light and colours
- High colour rendering

GLOWNEST 4 HEAD

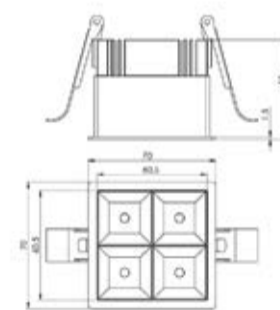


GLOWNEST 9 HEAD

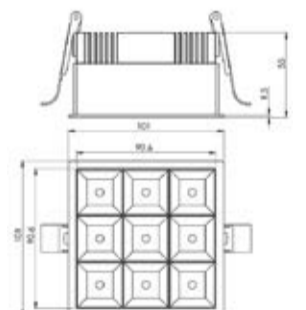

Light Distribution

Direct



CRI ≥ 90



TUNABLE
WHITE

GLOWNEST



GLOWNEST 1 HEAD

System Power	Dimension
2W	LXW- ?mm, Height- ?mm

GLOWNEST 2 HEAD

System Power	Dimension
4W	LXW- ?mm, Height- ?mm

GLOWNEST 3 HEAD

System Power	Dimension
6W	LXW- ?mm, Height- ?mm

GLOWNEST 5 HEAD

System Power	Dimension
10W	LXW- ?mm, Height- ?mm

Order Options

CCT (Colour Temperature)

3000K

4000K

5700K

Tunable White 2700K-6500K



CRI

>90

Beam Angle

WallWasher

Flood 40°

Flood 60°

Square 55°X55°

Rectangular 40°X65°

12°

34°

48°

Control

ON-OFF



ON-OFF (FLICKER FREE)



DALI-2 DT6



DALI-2 DT8



DALI+



Mounting


Recessed

Material Colour

RAL As Per Request

Optics Options


ΔB-D320-VMM
Beam Angle: Wall Washer

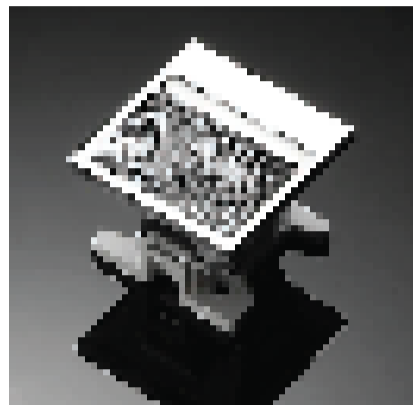

ΔB-BD00-P
Beam Angle: Flood 20°



ΔB-BD00-M
Beam Angle: Flood 30°

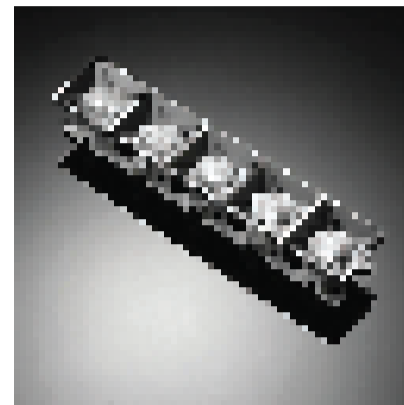


ΔB-BD00-QVM
Beam Angle: Square 30°/30°




ΔB-BD00-FL
Beam Angle: Double Angle 20°/30°




ΔB-BD00-M
Beam Angle: Wall Washer

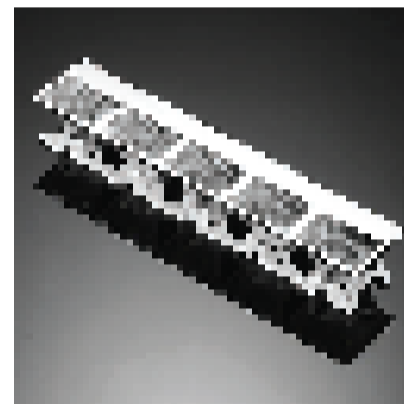


ΔB-D320-DFL
Beam Angle: Double Angle 20°/30°

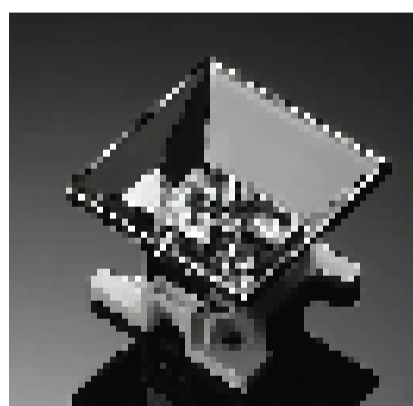


ΔB-D320-DFL
Beam Angle: Square 30°/30°

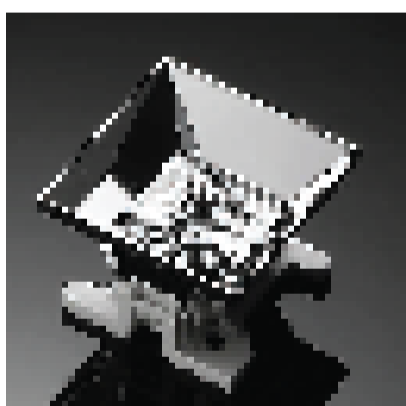

ΔB-D320-FM
Beam Angle: Flood 30°

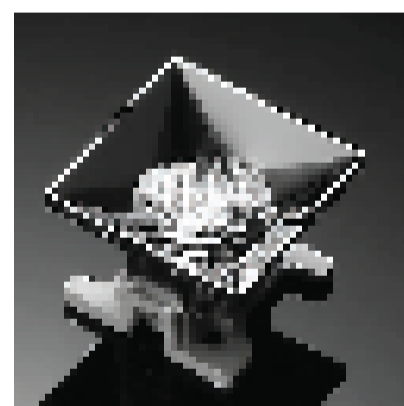

ΔB-D320-FF
Beam Angle: Flood 20°

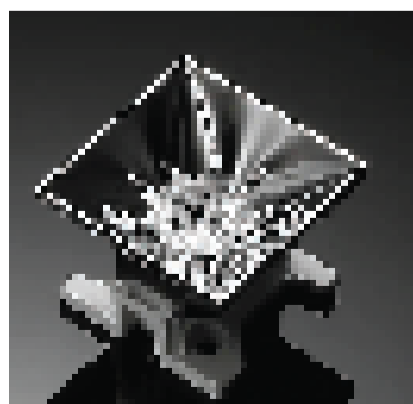

DL-B4200C
Beam Angle: Wall Washer



B4200C
Beam Angle: 15°, 30°, 20°

