

GLOWNEST TRIMLESS



Quick Info

CRI ≥ 90

3000K/ 4000K/ 5700K

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6, DALI-2 DT8, DALI+

SDCM<3

Reflector


L70 @50,000h

Types


Recessed

Single Line Diagram


GLOWNEST TL 1 HEAD




GLOWNEST TL 2 HEAD

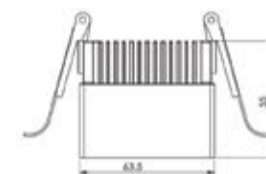

GLOWNEST TL 3 HEAD

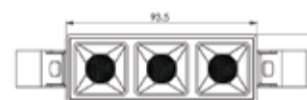


GLOWNEST TL 4 HEAD

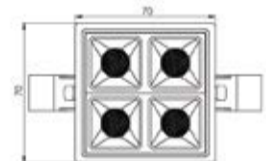

GLOWNEST TL 5 HEAD




GLOWNEST TL 9 HEAD

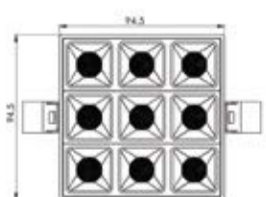

GLOWNEST TRIMLESS

Glownest Trimless Downlight features has:

- Luminaire housing of die cast aluminium
- Recessed spotlight with effortless installation
- Premium powder coated finish
- Optical PC reflector
- Technology for maximum efficiency
- Zero multiple shadows
- LED with effective colour rendering
- Overflowing colours with soft light and shadow
- Interpretation of the real environment light and colours
- High colour rendering



CRI ≥ 90



TUNABLE
WHITE

GLOWNEST TRIMLESS



GLOWNEST TRIMLESS 1 HEAD

System Power	Dimension
2W	LXW- 33.5X33.5mm, Height- 55mm

GLOWNEST TRIMLESS 2 HEAD

System Power	Dimension
4W	LXW- 63.5X33.5mm Height- 55mm

GLOWNEST TRIMLESS 3 HEAD

System Power	Dimension
6W	LXW- 93.5X33.5mm Height- 55mm

GLOWNEST TRIMLESS 4 HEAD

System Power	Dimension
6W	LXW- 70X70mm Height- 55mm

GLOWNEST TRIMLESS 5 HEAD

System Power	Dimension
10W	LXW- 153.5X33.5mm Height- 55mm

GLOWNEST TRIMLESS 9 HEAD

System Power	Dimension
15W	LXW- 94.5X94.5mm Height- 55mm

Order Options

CCT (Colour Temperature)

3000K

4000K

5700K

Tunable White 2700K-6500K



CRI

>90

Beam Angle

WallWasher

Flood 40°

Flood 60°

Square 55°X55°

Rectangular 40°X65°

12°

34°

48°

Control

ON-OFF



ON-OFF (FLICKER FREE)



DALI-2 DT6



DALI-2 DT8



DALI+



Mounting


Recessed

Material Colour

RAL As Per Request

Optics Options

AE-030A-WW
Beam Angle- Wall Washer

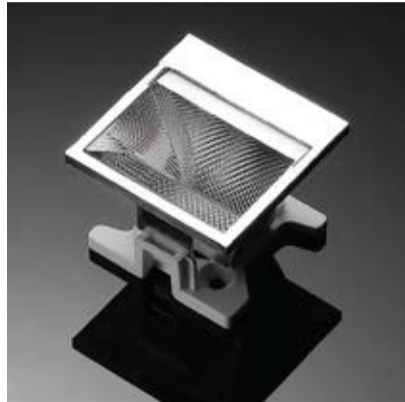

AE-150A-FF
Beam Angle- Flood 40°



AE-150A-FW
Beam Angle- Flood 60°



AE-150A-RWW
Beam Angle- Square 55°*55°



AE-150A-RFL
Beam Angle- Rectangular 40°*65°



AE-150A-FW
Beam Angle- Wall Washer




AE-030A-RFL
Beam Angle- Rectangular 40°*65°



AE-030A-RFL
Beam Angle: Square 55°*55°



AE-030A-FW
Beam Angle: Flood 60°

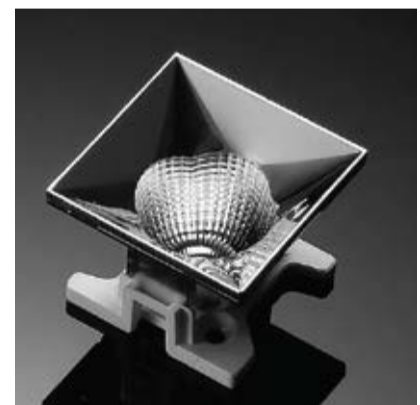

AE-030A-FF
Beam Angle- Flood 40°



SL-E-132EB
Beam Angle- Wall Washer



E-132EA
Beam Angle- 12°, 34°, 48°

