IKON-S
STEP LIGHT


divinity lights














IKON-S

Ikon-S Step light has :

- Luminaire housing of Die-Cast Aluminium
- IP65, High Ingress Protection against dust & moisture
- Extremely sustainable and requires little maintenance
- Lens optics for even light distribution
- Energy-efficient LED with high colour rendering
- Provides soft downward illumination to the desired walkway
- Versatile for use as a step, path, plinth or hallway lighting solution
- Edge lighting that adds sleek sophistication to contemporary and modern staircases

divinity lights

Quick Info

CRI ≥ 80

2700K, 3000K, 4000K

Non-Dimmable/ Dali-Dimmable

SDCM<3

Clear Glass


L70 @50,000h


Aluminium Die-Cast

Type

Recessed

Single Line Diagram

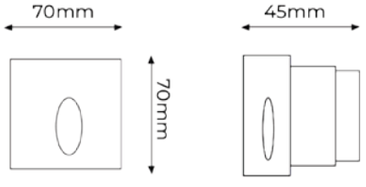




CRI ≥ 80

divinity lights

IKON-S



System Power	Dimensions
3W	L=70mm, W=70mm H=45mm

Order Options

CCT (Color Temperature)

2700K

3000K

4000K

CRI

>80

Beam Angle

60°

Control

Non-Dimmable



Dali- Dimmable



Mounting Type

Recessed

Material Color

RAL as per request