

**JETT-160**  
BOLLARD

divinitylights



### Quick Info

CRI  $\geq 90$

2700K, 3000K, 4000K

Non-Dimmable/ Dali-Dimmable

SDCM<3

Clear Diffuser


L70 @50,000h

Aluminium Die-Cast

### Types

Surface


### Single Line Diagram

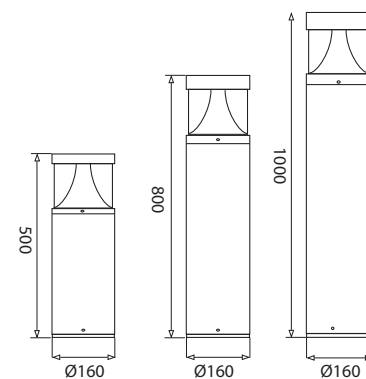

## JETT-160 BOLLARD

Jett-160 Bollard fixture has :

- Luminaire housing of Aluminium
- IP66, High Ingress Protection against dust & moisture
- Flicker free operation for eye protection
- Energy-efficient LED with high colour rendering
- The built quality ensures long and maintenance free service life
- Optimum for every outdoor space including society parks, streets, educational institutes, and pathways
- Garden & pathway luminaires create pleasant light distribution with a high degree of visual comfort
- LED bollard, designed to provide radially symmetric light emission of 360°
- Sustainable LED technology offers durability and optimal light output with low power consumption



CRI  $\geq 90$

JETT-160 BOLLARD



Product Order Code	System Power	Dimensions
1868	10W	Dia=160mm H=500mm
1869	20W	Dia=160mm H=800mm
1870	30W	Dia=160mm H=1000mm

Order Options

CCT (Colour Temperature)

2700K  
3000K  
4000K

CRI

>90

Beam Angle

N.A

Control

Non-Dimmable



Dali-Dimmable



Mounting Type

Surface

Material Colour

Grey

