



JETTA RING

divinity lights

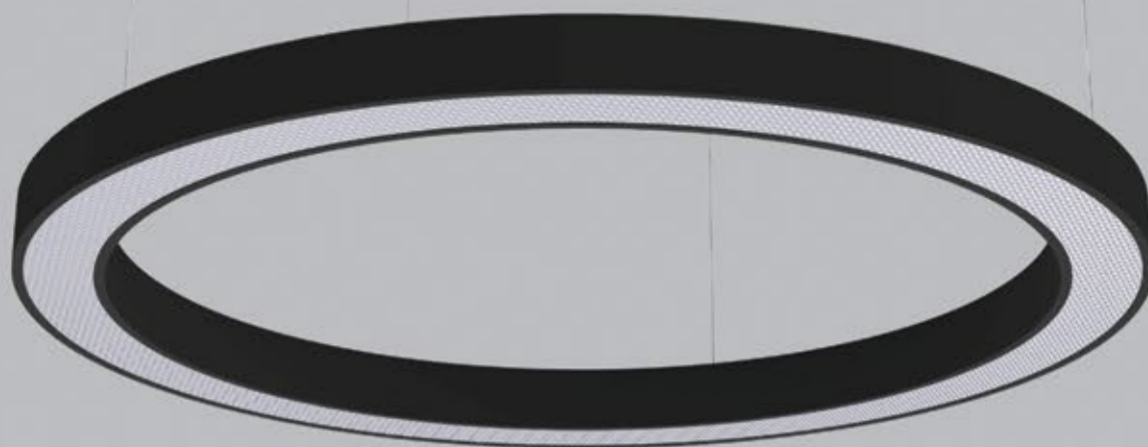

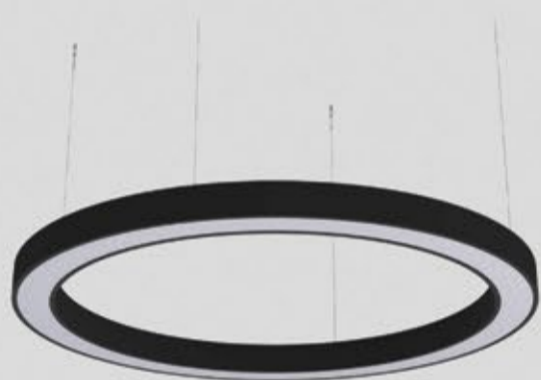

JETTA RING

Jetta Ring has :

- Ring-shaped luminaire
- Aluminium Housing
- Premium Finish Powder coating
- High efficiency Micro Prismatic diffuser
- Uninterrupted and uniform ring of LED light
- Halo of light around the ceiling
- Energy efficient LED with high colour rendering
- LED PCB mounted on insert design with heat sink
- Pendant using suspension cable with M6 bolt and fastener
- Bottom opening for easy maintenance

Quick Info

CRI ≥90

3000K/ 4000K/ 5700K

Tunable white (2700K-6500K)

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM<3

Micro Prismatic Diffuser

L70 @50,000h


Aluminium

Types

Pendant/ Surface/ Recessed

Single Line Diagram

Pendant/ Surface/ Recessed

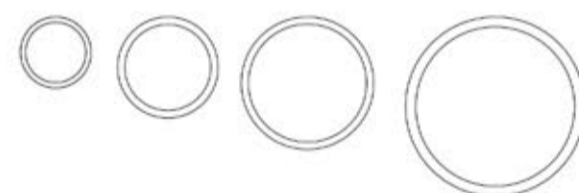


Ø660 Ø900 Ø1000 Ø1200

Colours



Light Distribution

Direct Direct-Indirect



CRI ≥ 90



TUNABLE
WHITE

JETTA RING



JETTA RING (DIRECT)

System Power	Dimensions
35W	Dia = 660mm
50W	Dia = 900mm
70W	Dia = 1000mm
105W	Dia = 1200mm

JETTA RING (DIRECT-INDIRECT)

System Power	Dimensions
35W	Dia= 660mm
50W	Dia = 900mm
70W	Dia= 1000mm
105W	Dia = 1200mm

Order Options

Distribution

- Direct
- Indirect
- Up-50% / Down-50%
- Up-30% / Down-70%
- Up-70% / Down-30%
- Up-20% / Down-80%
- Up-80% / Down-20%

CCT (Color Temperature)

- 3000K
- 4000K
- 5700K
- Tunable 2700K-6500K



CRI

>90

Beam Angle

Diffused

Control

- ON-OFF
- ON-OFF (FLICKER FREE)
- DALI-2 DT6
- DALI-2 DT8
- DALI +



Mounting Type

- Pendent
- Surface
- Recessed

Material Color

RAL As Per Request

Photometric Details

LUMINOUS INTENSITY DISTRIBUTION

