

divinity lights

The image features three concentric, glowing circular light fixtures, likely chandeliers, arranged in a spiral pattern. Each fixture is composed of numerous small, bright lights. The background is a light gray with a subtle, repeating diamond or lattice pattern. The overall aesthetic is elegant and modern.

LUMINA BLOOM

LUMINA BLOOM SERIES


divinity lights

LUMINA BLOOM CIRCULAR PENDANT



The direct emission is accompanied by an indirect emission that develops along its modules to balance the relationship of light with the environment. This second emission is also reduced to a minimum in its physical presence, and without adding anything redundant it becomes a support that contributes to the structure of its slender profile.

Somnium is light that does not dress itself up as something surplus, but A synthesises the essentials according to defined parameters.

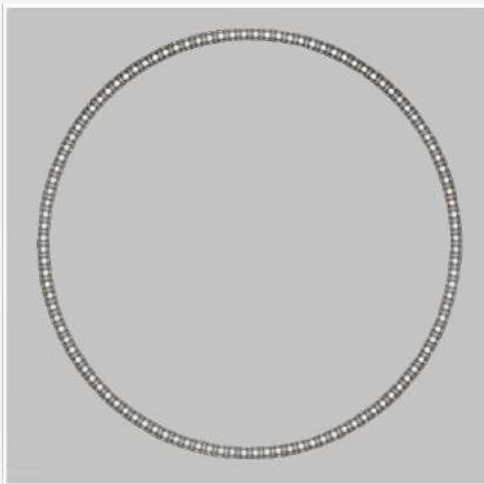

CIRCULAR MODULE

DIMENSIONS

Ø = 460mm / 520mm / 650mm / 850mm / 1050mm /
1250mm W=30mm, H=42mm

WATTAGE

10W - 45W

CCT


3000K / 4000K TUNABLE


CRI

> 80 / 90 / 95

MATERIAL & FINISH

ALUMINIUM WITH SILVER FINISH

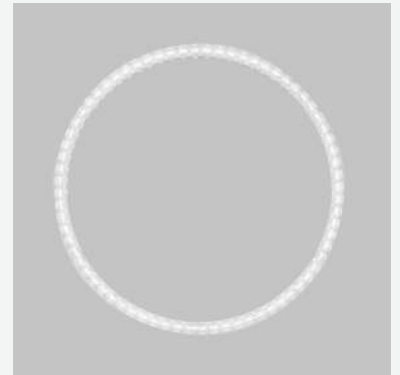

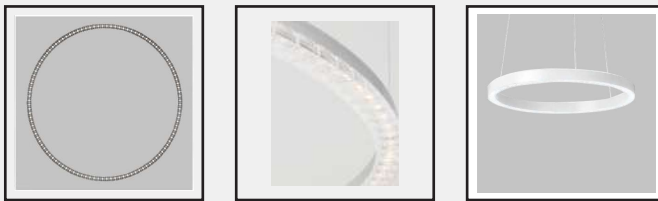

LUMINA BLOOM CIRCULAR PENDANT

Lumina bloom circular pendant sleek and slim circular fixture has:

- Luminaire housing of extruded aluminium
- No visible screw
- Snap-fit system
- LED PCB mounted on insert design with heat sink
- Bottom opening for easy maintenance
- Pendant with cable suspension
- M6 bolt for M6 fastener
- Energy-efficient LED

Quick Info

CRI ≥ 80/90/95

3000K/4000K TunableWhite

Up to 100lm/W

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2/DALI-2 DT8/D4i/DALI +

POE (Power Over Ethernet)

SDCM<3


ALUMINIUM WITH SILVER FINISH

Types

Pendant

Single

Penda




Colours



Light distribution

Direct



CRI ≥ 80/ 90/ 95



TUNABLE
WHITE

LUMINA BLOOM CIRCULAR PENDANT



LUMINA BLOOM CIRCULAR PENDANT

Product Order Code	System Power	Dimensions
9601-1	6W	L = 314mm
9601-2	12W	L = 630mm
9601-3	18W	L = 945mm
9601-4	25W	L = 1258mm
9601-5	45W	L = 2355mm

Order Options

Distribution

Direct-Indirect

Lumen Type

Low	1
High	2

CCT (Colour Temperature)

3000K	1
4000K	2
Tunable White 3000k-4000k	3

CRI

>80	1
>90	2
>95	3

Beam Angle

110°

Control

ON-OFF		1
ON-OFF (FLICKER FREE)		2
DALI-2		3
DALI-2 DT8		4
DALI +		5
D4i		6
POE (Power Over Ethernet)		7




Mounting Type

Pendant	1
---------	---

Material Colour


Black		1
White		2
Grey		3

Accessories

Product Order Code	Accessories Name	Accessories Image
9601-01 <input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	LED PCB	
9601-02	Suspension Wire	
9601-03	Profile Connector	

Order Options

Lumen Type	<input checked="" type="checkbox"/>
Low	1
High	2

CCT (Colour Temperature)	<input checked="" type="radio"/>
3000K	1
4000K	2
Tunable White 3000k-4000k 	3

CRI	<input checked="" type="radio"/>
>80	1
>90	2
>95	3

Material Colour	<input checked="" type="radio"/>
Black <input type="radio"/>	1
White <input type="radio"/>	2
Grey <input type="radio"/>	3



LUMINA BLOOM CIRCULAR PENDANT