LEXIS-R
STEP LIGHT


divinity lights





divinity lights









LEXIS-R

Lexis-R Step light has :

- Luminaire housing of Die-Cast Aluminium
- IP65, High Ingress Protection against dust & moisture
- Extremely sustainable and requires little maintenance
- Lens optics for even light distribution
- Energy-efficient LED with high colour rendering
- Wall Light with integrated LED for orientation of pavements, stairs or terraces
- Excellent downward illumination with minimal power consumption
- Sleek & sophisticated round shape surface mounted LED light designed to elevate your outdoor lighting experience

Quick Info

CRI ≥ 80

2700K, 3000K, 4000K

70 lm/W

Non-Dimmable/ Dali-Dimmable

SDCM<3

Lens With Tempered Glass

L70 @50,000h


Aluminium Die-Cast

Types


Surface

Single Line Diagram

LEXIS- R/100

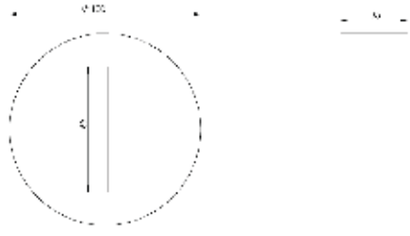


LEXIS- R/150

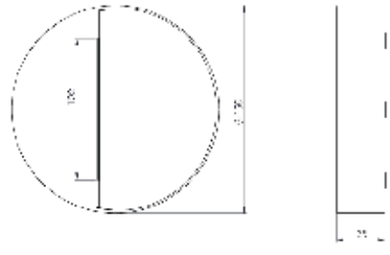

LEXIS- R/200






CRI ≥ 80

divinity lights

LEXIS-R



LEXIS- R/100

System Power	Dimensions
6W	Dia- 100mm, H- 35mm

LEXIS- R/150

System Power	Dimensions
8W	Dia- 150mm, H- 35mm

LEXIS- R/200

System Power	Dimensions
12W	Dia- 200mm, H- 35mm

Order Options

CCT (Colour Temperature)

2700K
3000K
4000K

CRI

>80

Beam Angle

Forward-Throw Distribution

Control

Non Dimmable

Dali Dimmable

Mounting Type

Surface

Material Colour

RAL as per request