LEXIS-R/100
STEP LIGHTS

Direct | Surface



LEXIS-R/100 STEP LIGHTS



Quick Info

Mounting Type
Surface

Material Colour
Customize RAL available

Protection mode
IP65

Driver Details
Non-Dimmable/ Dali-Dimmable

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED
CCT- 2700K/ 3000K/ 4000K

CRI- ≥ 80

Life Span - L70@50000h

MacAdam - ≤3 SDCM

Beam Angle
Forward-Throw Distribution

Optics
Lens With Tempered Glass

Efficacy
70lm/W

LEXIS-R/100 STEP LIGHT luminaire features a sleek, modern design crafted from aluminium die-cast housing with a premium powder-coated finish.

Powered by high-quality LEDs with a binning tolerance of ≤ 3 SDCM and CRI ≥ 80, this fixture ensures excellent color rendering and long-lasting performance. It maintains at least 70% of its luminous flux after 50,000 operating hours, guaranteeing durability and reliability over time. High-efficiency **Lens With Tempered Glass** provides uniform illumination and reduces glare.


With a standard size of 100mm Dia, 35mm Height, this fixture is crafted for direct light distribution, making it ideal for professional application.

Customisations in RAL finish, wattages, and Length available as per request to enhance installation and functionality.

Single Line Diagram

Surface Mounted

LEXIS- R/100

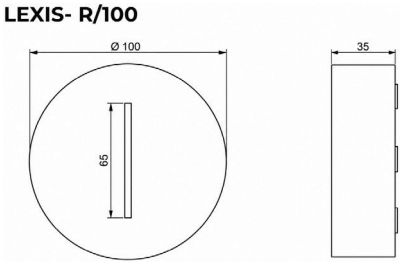

Electrical
Wattage - 6W

Input Voltage- 220-240V AC

Physical Dimensions
Dia- 100mm

Height- 35mm

divinity lights

Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi, Rajasthan 301019.

www.divinitylights.com