LEXIS SM-S/105
STEP LIGHTS

Direct | Surface



LEXIS SM-S/105 STEP LIGHT luminaire features a sleek, modern design crafted from aluminium die-cast housing with a premium powder-coated finish.


Powered by high-quality LEDs with a binning tolerance of ≤ 3 SDCM and CRI ≥ 80, this fixture ensures excellent color rendering and long-lasting performance. It maintains at least 70% of its luminous flux after 50,000 operating hours, guaranteeing durability and reliability over time. High-efficiency **Lens With Tempered Glass** provides uniform illumination and reduces glare.

With a standard size of 105mm Length, 105mm Width and 72mm Height, this fixture is crafted for direct light distribution, making it ideal for professional application.

Customisations in RAL finish, wattages, and Length available as per request to enhance installation and functionality.

Single Line Diagram

Wall Surface Mounted

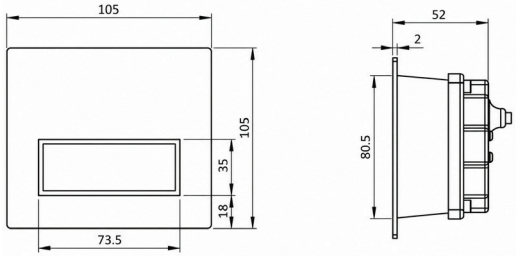

LEXIS SM-S/105 STEP LIGHTS



Quick Info

Mounting Type
Wall Surface

Material Colour
Customize RAL available

Protection mode
IP65

Driver Details
Non-Dimmable/ Dali-Dimmable

Power Factor (PF) -0.95

THD- <10%

UGR - <19

LED
CCT- 2700K/ 3000K/ 4000K

CRI- ≥ 80

Life Span - L70@50000h

MacAdam - ≤3 SDCM

Beam Angle
Forward-Throw Distribution

Optics
Lens With Tempered Glass

Efficacy
70lm/W

Electrical
Wattage - 6W

Input Voltage- 2220-240V AC

Physical Dimensions
Length- 105mm

Width- 105mm

Height- 72mm

divinity lights

Address: Plot No-A-89, RIICO Industrial Area, Karoli, Bhiwadi, Rajasthan 301019.

www.divinitylights.com