

Quick Info

CRI ≥ 80/ 90/ 95

3000K/ 4000K/ 5700K/ 6500K

Tunable White (2700K-6500K)

Up to 100lm/W

ON-OFF/ON-OFF (FLICKER FREE)

DALI-2 / DALI-2 DT8 / D4i / DALI +

POE (Power Over Ethernet)

SDCM<3

Micro Prismatic Diffuser / PMMA
Diffuser


L70 @50,000h

Aluminium


Types

Pendant/Recessed


Single Line Diagram

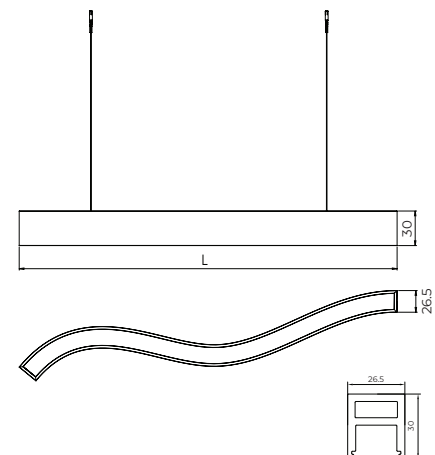

Light Distribution



Colours



CRI ≥ 80/ 90/ 95



TUNABLE
WHITE

LIFX TRIMLESS

LIFX Trimless has:

- **Curved LED Linear:** Sleek, modern curved lighting for contemporary interiors.
- **Aluminum Housing:** Lightweight, durable, and designed for efficient heat management.
- **Custom ARC Lengths:** Available in multiple ARC lengths for versatile design applications.
- **Dot-Free Illumination:** Seamless, continuous lighting without visible dots.
- **Flexible Design:** Supports infinite architectural patterns and configurations.
- **Uniform Light:** Delivers smooth, even light diffusion with reduced glare.
- **Pendant or Recessed Mounting:** Suitable for both pendant or recessed installations.
- **Curved Patterns:** Unique, eye-catching curved and circular designs.
- **Trimless Finish:** Seamless integration into ceilings for a clean, minimalistic appearance.
- **Quick Mounting:** Efficient installation with a quick mounting system.
- **M6 Fasteners:** Secure fixture attachment using M6 bolts.
- **Prismatic Diffuser:** High-performance diffuser for enhanced light quality.
- **Energy-Efficient LEDs:** Cost-effective LEDs with superior color rendering and energy savings.

CURVE SOFT 28



CURVE SOFT 28

Product Order Code	System Power	Dimension
3025- 1	6W	L = 300mm, W = 28.5mm, H = 32mm
3025- 2	12W	L = 600mm, W = 28.5mm, H = 32mm
3025- 3	18W	L = 900mm, W = 28.5mm, H = 32mm
3025- 4	25W	L = 1200mm, W = 28.5mm, H = 32mm
3025- 5	50W	L = 2400mm, W = 28.5mm, H = 32mm

Order Options

Distribution

Direct

Lumen Type

- Low 1
- High 2

CCT (Colour Temperature)

- 3000K 1
- 4000K 2
- 5700K 3
- 6500K 4
- Tunable White 2700K-6500K 5

CRI

- >80 1
- >90 2
- >95 3

Beam Angle

110°

Control

- ON-OFF 1
- ON-OFF (FLICKER FREE) 2
- DALI-2 3
- DALI-2 DT8 4
- DALI + 5
- D4i 6
- POE (Power Over Ethernet) 7



Mounting Type

- Pendant 1
- Recessed 2

Material Colour

- Black
- White
- Grey

Accessories


Product Order Code	Accessories Name	Accessories Image
3025-01 <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	LED PCB	
3025-02	Suspension Wire	

Order Options

Lumen Type

- Low 1
- High 2

CCT (Colour Temperature)

- 3000K 1
- 4000K 2
- 5700K 3
- 6500K 4
- Tunable White 2700K-6500K  5

CRI

- >80 1
- >90 2
- >95 3