

LUMINA BLOOM RING



Quick Info

CRI ≥90

3000K/ 4000K/ 5700K

TUNABLE WHITE 2700-6500K

ON-OFF/ ON-OFF (FLICKER FREE)

DALI-2 DT6 / DALI-2 DT8/ DALI+

SDCM<3

Lens

L70 @50,000h



Aluminium

Types

Pendant/Surface

Single Line Diagram

Profile Code
SDL-1037




LUMINA BLOOM RING

Lumina Bloom Ring fixture has

- Extruded Aluminium Luminaire Housing
- Premium Finish Powder coating
- Range of size and angle design
- Modular design with uniform illumination
- Micro structure antiglare optical lens
- Snap fit system with No visible screw
- Energy efficient LED with high colour rendering
- LED PCB mounted on insert design with heat sink
- Pendant using suspension cable with M6 bolt and fastener
- Bottom opening for easy maintenance

Light Distribution



CRI ≥90



TUNABLE
WHITE

LUMINA BLOOM RING



LUMINA BLOOM RING

System Power	Dimensions
25W	L= 300mm
35W	L= 600mm
40W	L= 900mm
50W	L= 1200mm
60W	L= 2400mm

Order Options

Distribution

Direct

CCT (Color Temperature)

3000K
4000K
5700K
Tunable 2700K-6500K



CRI

>90

Beam Angle

40°
50°

Control

ON-OFF
ON-OFF (FLICKER FREE)
DALI-2 DT6
DALI-2 DT8
DALI +




Mounting Type

Pendent

Material Color


RAL As Per Request

Photometric Details

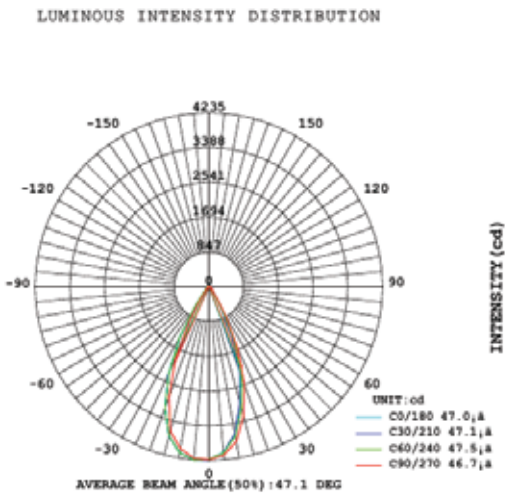


BEAM ANGLE OPTION

DIM(MM) W3.7, L100




Name	H	Typ. FWHM
DL-KYLSH3-14TMC-50	2.8	50°
DL-KYLSH3-14TTJB-40	3.4	40°
DL-KYLSH3-14TFGB-50	2.8	50°
KYLSH3-14TFKG-50	2.8	50°
KYLSH3-14TMKG-50	2.8	50°

DIM(MM) W4.7, L100




Name	H	Typ. FWHM
DL-KYLSH4-14TMC-50	3.3	50°
DL-KYLSH4-14TTJB-40	4.1	40°
DL-KYLSH4-14TFGB-50	3.3	50°

DIM(MM) W8, L140



Name	H	Typ. FWHM
DL-KYLSH8-14TMC-50	5.4	50°
DL-KYLSH8-14TTJB-40	8.15	40°
DL-KYLSH8-14TFGB-50	5.4	50°

DIM(MM) W12, L168



Name	H	Typ.FWHM
DL-KYLSH12-14TMC-50	7.5	50°
DL-KYLSH12-14TTJB-40	1.04	40°
DL-KYLSH12-14TFGB-50	7.5	50°